
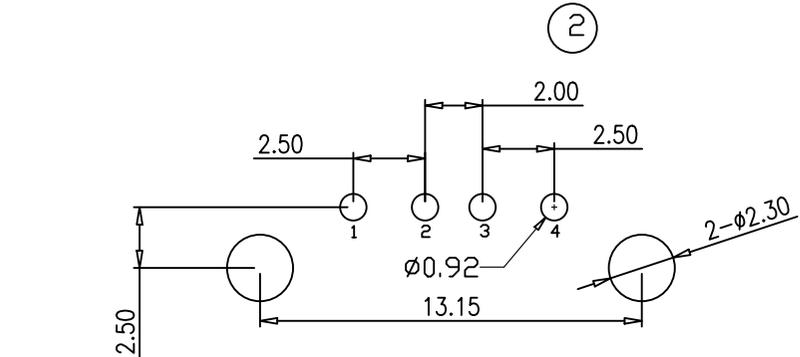
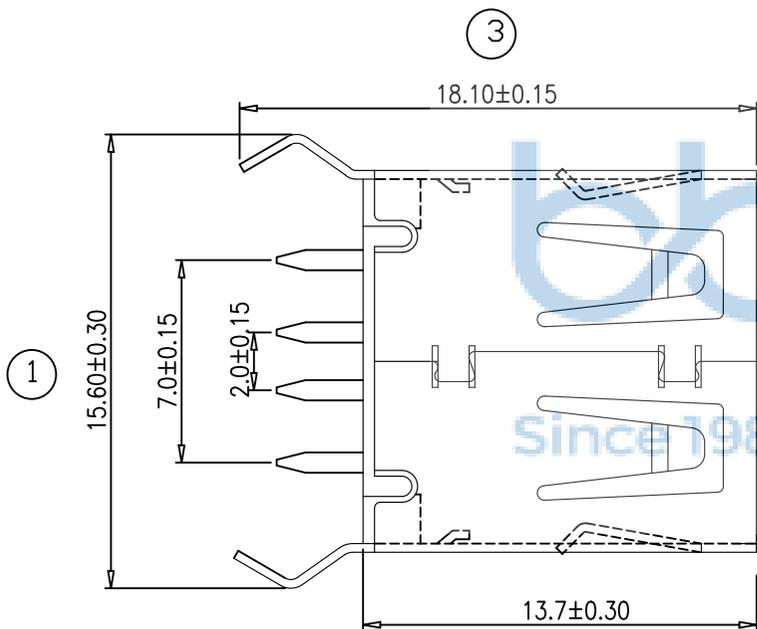
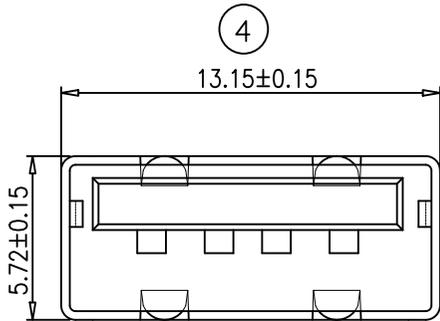


REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	TSP

备注:

1. 材质:
  - 1-1 塑胶: PBT/LCP UL94V-0,
  - 1-2 端子: C2680
  - 1-3 外壳: SPCC
2. 电镀:
  - 端子接触区域: 镀金1u"min.
  - 端子锡脚: 镀亮锡50u"min.
  - 端子整个表面: 镀镍50u"min.
  - 铜壳: 打铜底80u"min,再镀光亮可焊镍80u"min
3. 电气性能:
  - 3-1 耐电压: 500V 交流电
  - 3-2 接触电阻: 30 毫欧 最大
  - 3-3 绝缘阻抗: 1000 兆欧最小
4. 机械性能:
  - 4-1 插入力: 3.5kgf MAX
  - 4-2 拨出力: 1.02kgf MIN
5. 环境:
  - 温度范围: -55° C TO +85° C



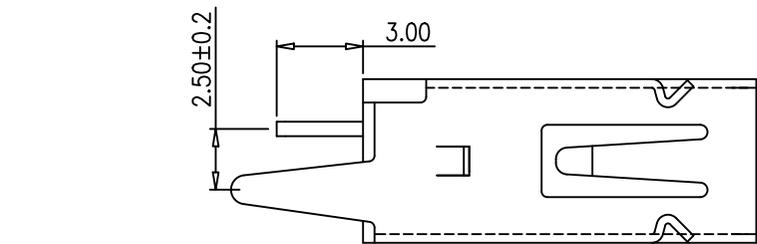


Recommended P.C.B Layout ( $\pm 0.05$ )



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司 .X: $\pm 0.38$ .XX: $\pm 0.25$ .XXX: $\pm 0.13$ X': $\pm 3'$ .X': $\pm 2'$ .XX': $\pm 1'$		NAME: USB 2.0 A母 180度 DIP 弯脚 平口 铁壳 PBT白胶 H=13.70 盒装 APPD. JM_Zheng CHKD. LYX DR. TSP		PJ. NO.: UB.01.12-21-V008 SIZE: A4   DRW NO.: FINISH: SEE NOTES   MAT'L.: SEE NOTES SCALE: N/A   REV.: A0   UNIT: mm   PAGE: 1/2	
--	--	---	--	---	--	---	--

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	TSP

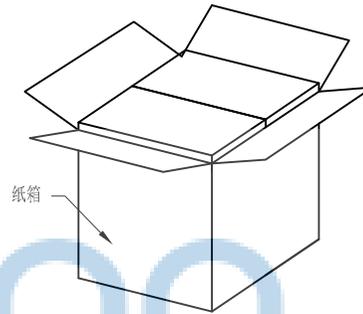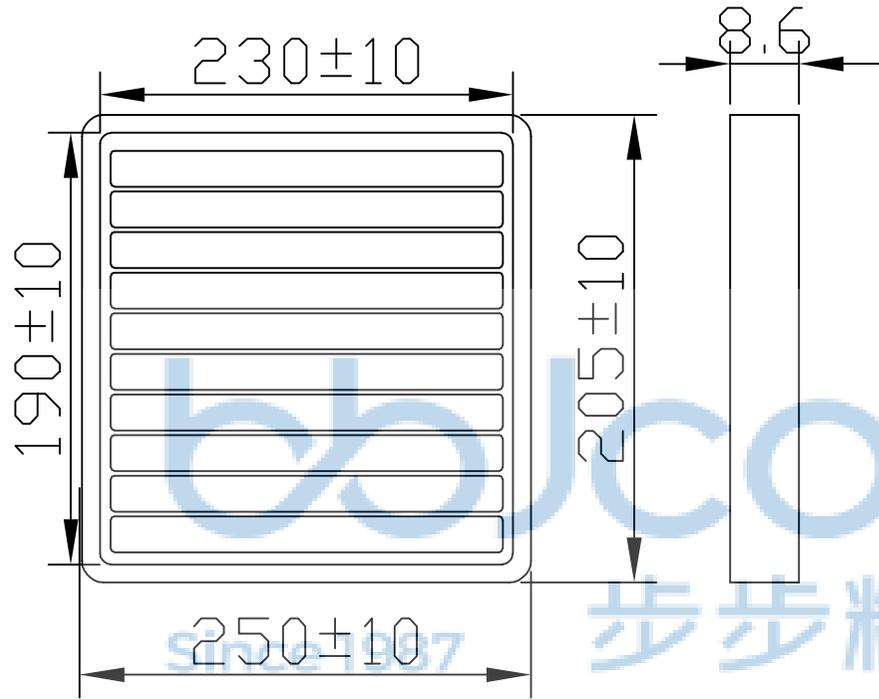

纸箱规格: 350\*210\*290

1. 包装要求:
- 1.1 每盒吸塑盒包装100pcs;
  - 1.2 每20盘放一箱, 共计2000PCS;
  - 1.3 纸箱外贴上标签。

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X': ±3" .X': ±2" .XX': ±1"	
APPD.	JM_Zheng	NAME: USB 2.0 A母 180度 DIP 弯脚 平口 铁壳 PBT白胶 H=13.70 盒装	
CHKD.	LYX	PJ. NO.: UB.01.12-21-V008	
DR.	TSP	SIZE: A4   DRW NO.:	
PDWG.NO: 0383-1		FINISH: SEE NOTES   MAT'L.: SEE NOTES	
		SCALE: N/A   REV.: A0   UNIT: mm   PAGE: 2/2	