

REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0				

规格说明:Specifications:

电气特性:Electrical:

1. 额定电流: Current Rating
1.5A/contact terminal
2. 额定电压: Voltage Rating
30V DC
3. 接触阻抗: Contact Resistance
30 milliohms MAX
4. 耐电压: Dielectric Withstanding Voltage:
500 V AC AT Sea Level
5. 绝缘阻抗: Insulation Resistance:
1000MEGA ohms MIN

物理性能:Mechanical:

1. 插拔力: Connector Mate and Unmate Force
Mate force: 3.57kgf (MAX)
Unmate force: 1.02kgf (MIN)
2. 端子保持力: Terminal Retention
1.0kgf (MIN)

原材料:Material:





1. 塑胶: Housing:
Hing Temperature Tnermaplastics,
2. 端子: Contact: Copper Alloy C2680
3. 外壳: Shell: Copper Alloy C2680/SPCC

电镀:Finish:

1. 端子: Contact: Plated Gold in Mating Area;
Tin On Solder Talls




端子四周镀30U" (MIN) 锡, 镀金区域镀80-100U" 镀金1U"

2. 外壳: Shell:
壳四周镀80U" (MIN) 镍
Nickel Plating

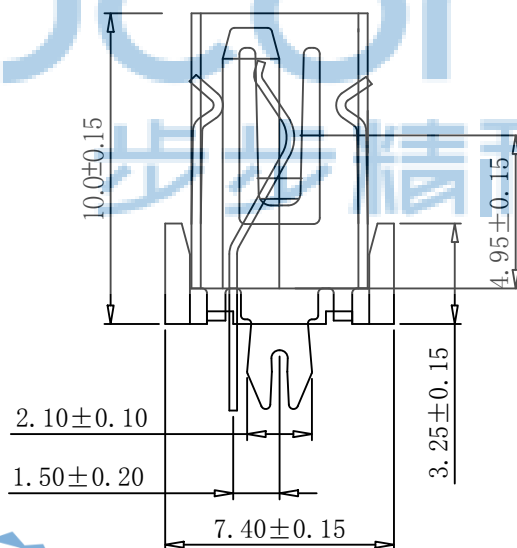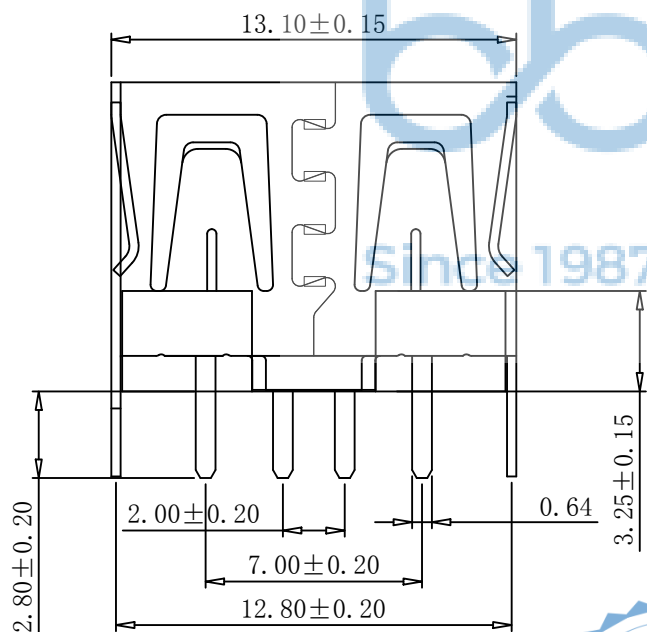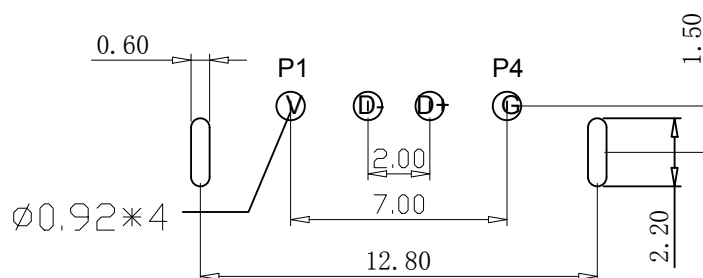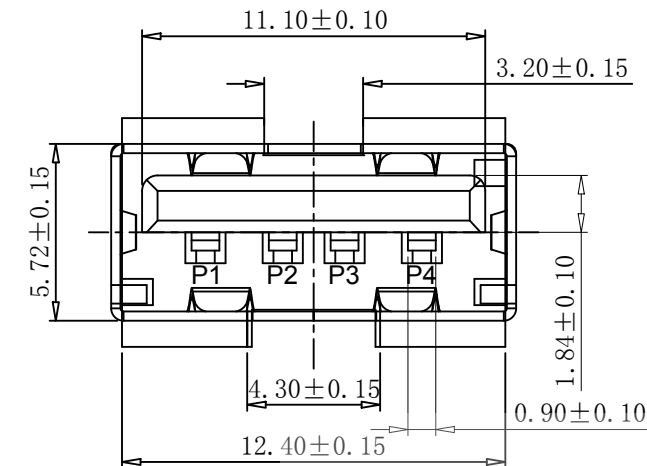

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. PDWG.NO: 0383-1		深圳市步步精科技有限公司				
		.X: ±0.38 X°: ±3° .XX: ±0.25 .X°: ±2° .XXX: ±0.13 .XX°: ±1°		NAME: USB 2.0 AF 180度 直脚直插 端子DIP H=10.0 平口 PBT白胶 铜壳		
		APPD.	JM_Zheng		P.J. NO. : UB.01.12-22-V005	
	CHKD.	LYX	SIZE: A4 DRW NO. :			
			FINISH: SEE NOTES		MAT' L. : SEE NOTES	
	DR. TSP		SCALE: N/A	REV.: A0	UNIT: mm	PAGE: 1/2

REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0				

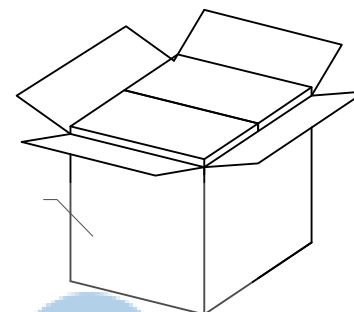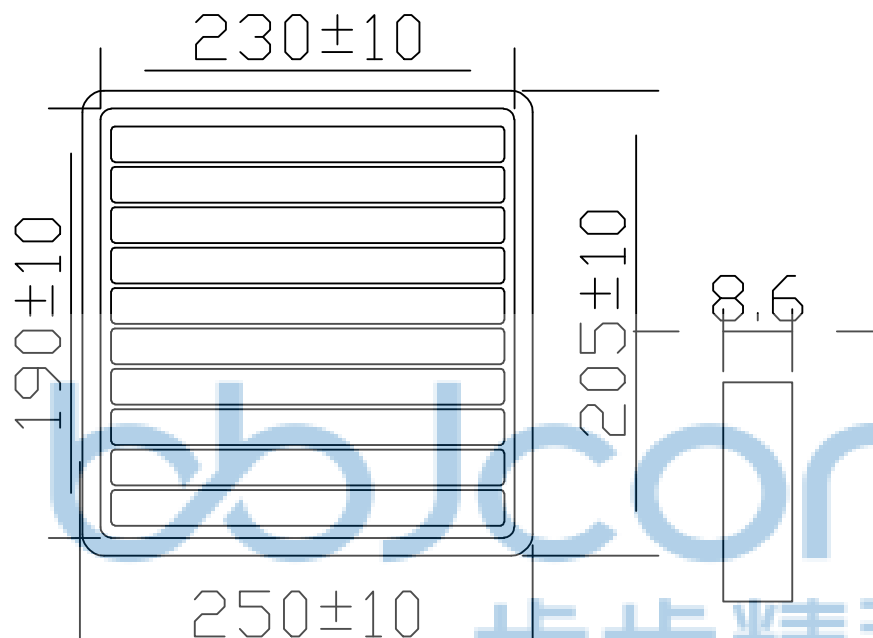

1. 包装要求:
- 1.1 每盒吸塑盒包装100pcs;
 - 1.2 每20盘放一箱, 共计2000PCS;
 - 1.3 纸箱外贴上标签。

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. PDWG.NO: 0383-1		深圳市步步精科技有限公司		NAME: USB 2.0 AF 180度 直脚直插 端子DIP H=10.0 平口 PBT白胶 铜壳	
.X: ±0.38 .X°: ±3° .XX: ±0.25 .X°: ±2° .XXX: ±0.13 .XX°: ±1°		APPD. JM_Zheng CHKD. LYX DR. TSP		P.J. NO.: UB.01.12-22-V005 SIZE: A4 DRW NO.: FINISH: SEE NOTES MAT'L.: SEE NOTES SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2	