
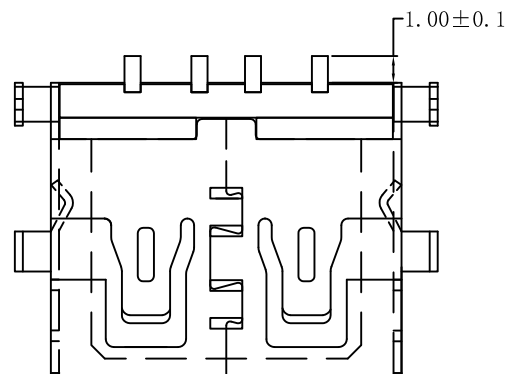
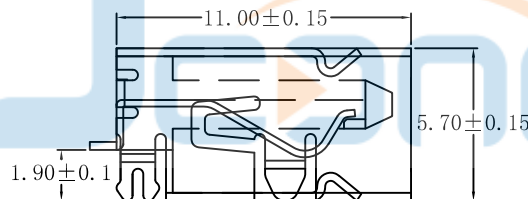
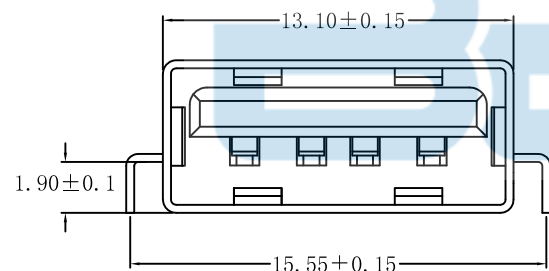
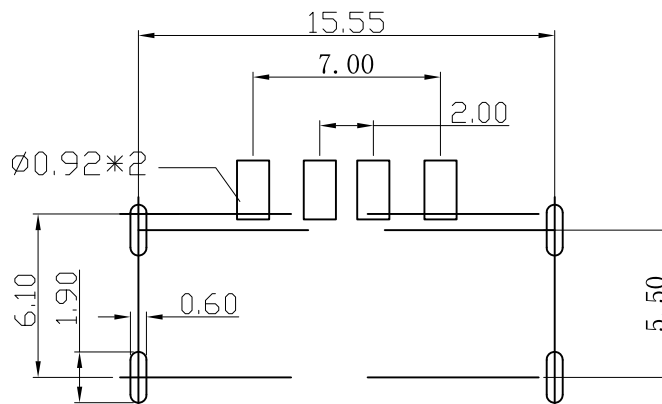


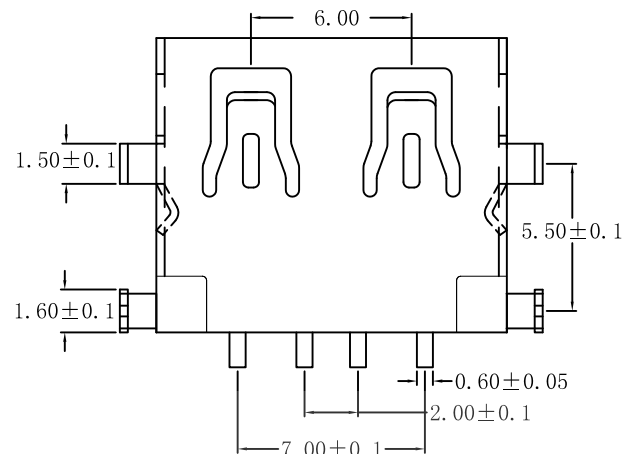

REV.	DESCRIPTION	NAME	DATE
A	NEWS ISSUE		

规格说明:Specifications:

电气特性:Electrical:

1. 额定电流: Current Rating
1.5A/contact terminal
2. 额定电压: Voltage Rating
30V DC
3. 接触阻抗: Contact Resistance
30 milliohms MAX
4. 耐电压: Dielectric Withstanding Voltage:
500 V AC AT Sea Level
5. 绝缘阻抗: Insulation Resistance:
1000MEGA ohms MIN

物理性能: Mechanical:

1. 插拔力: Connector Mate and Unmate Force
Mate force: 3.57kgf (MAX)
Unmate force: 1.02kgf (MIN)
2. 端子保持力: Terminal Retention
1.2kgf (MIN)

原材料: Material:

1. 塑胶: Housing:
Hing Temperature Thermoplastics,
UL 94V-0 LCP/PBT
2. 端子: Contact: Copper Alloy C2680
3. 外壳: Shell: Copper Alloy C2680/SPCC

电镀: Finish:


1. 端子: Contact: Plated Gold in Mating Area;
Tin On Solder Tails
2. 外壳: Shell:
Nickel Plating



深圳市步步精科技有限公司

TITLE: USB 2.0 AF 90度 四脚插 沉板1.90 L=11.00 H=5.70
端子SMT 平口 LCP本色 铁壳

TOLERANCE UNSPECIFIED			 深圳市步步精科技有限公司 TITLE: USB 2.0 AF 90度 四脚插 沉板1.90 L=11.00 H=5.70 端子SMT 平口 LCP本色 铁壳		
CUSTOMER DRAWING					
DRAWN/ DATE					
CHECKED/ DATE					
APPROVED/ DATE			SHEET: 页码		

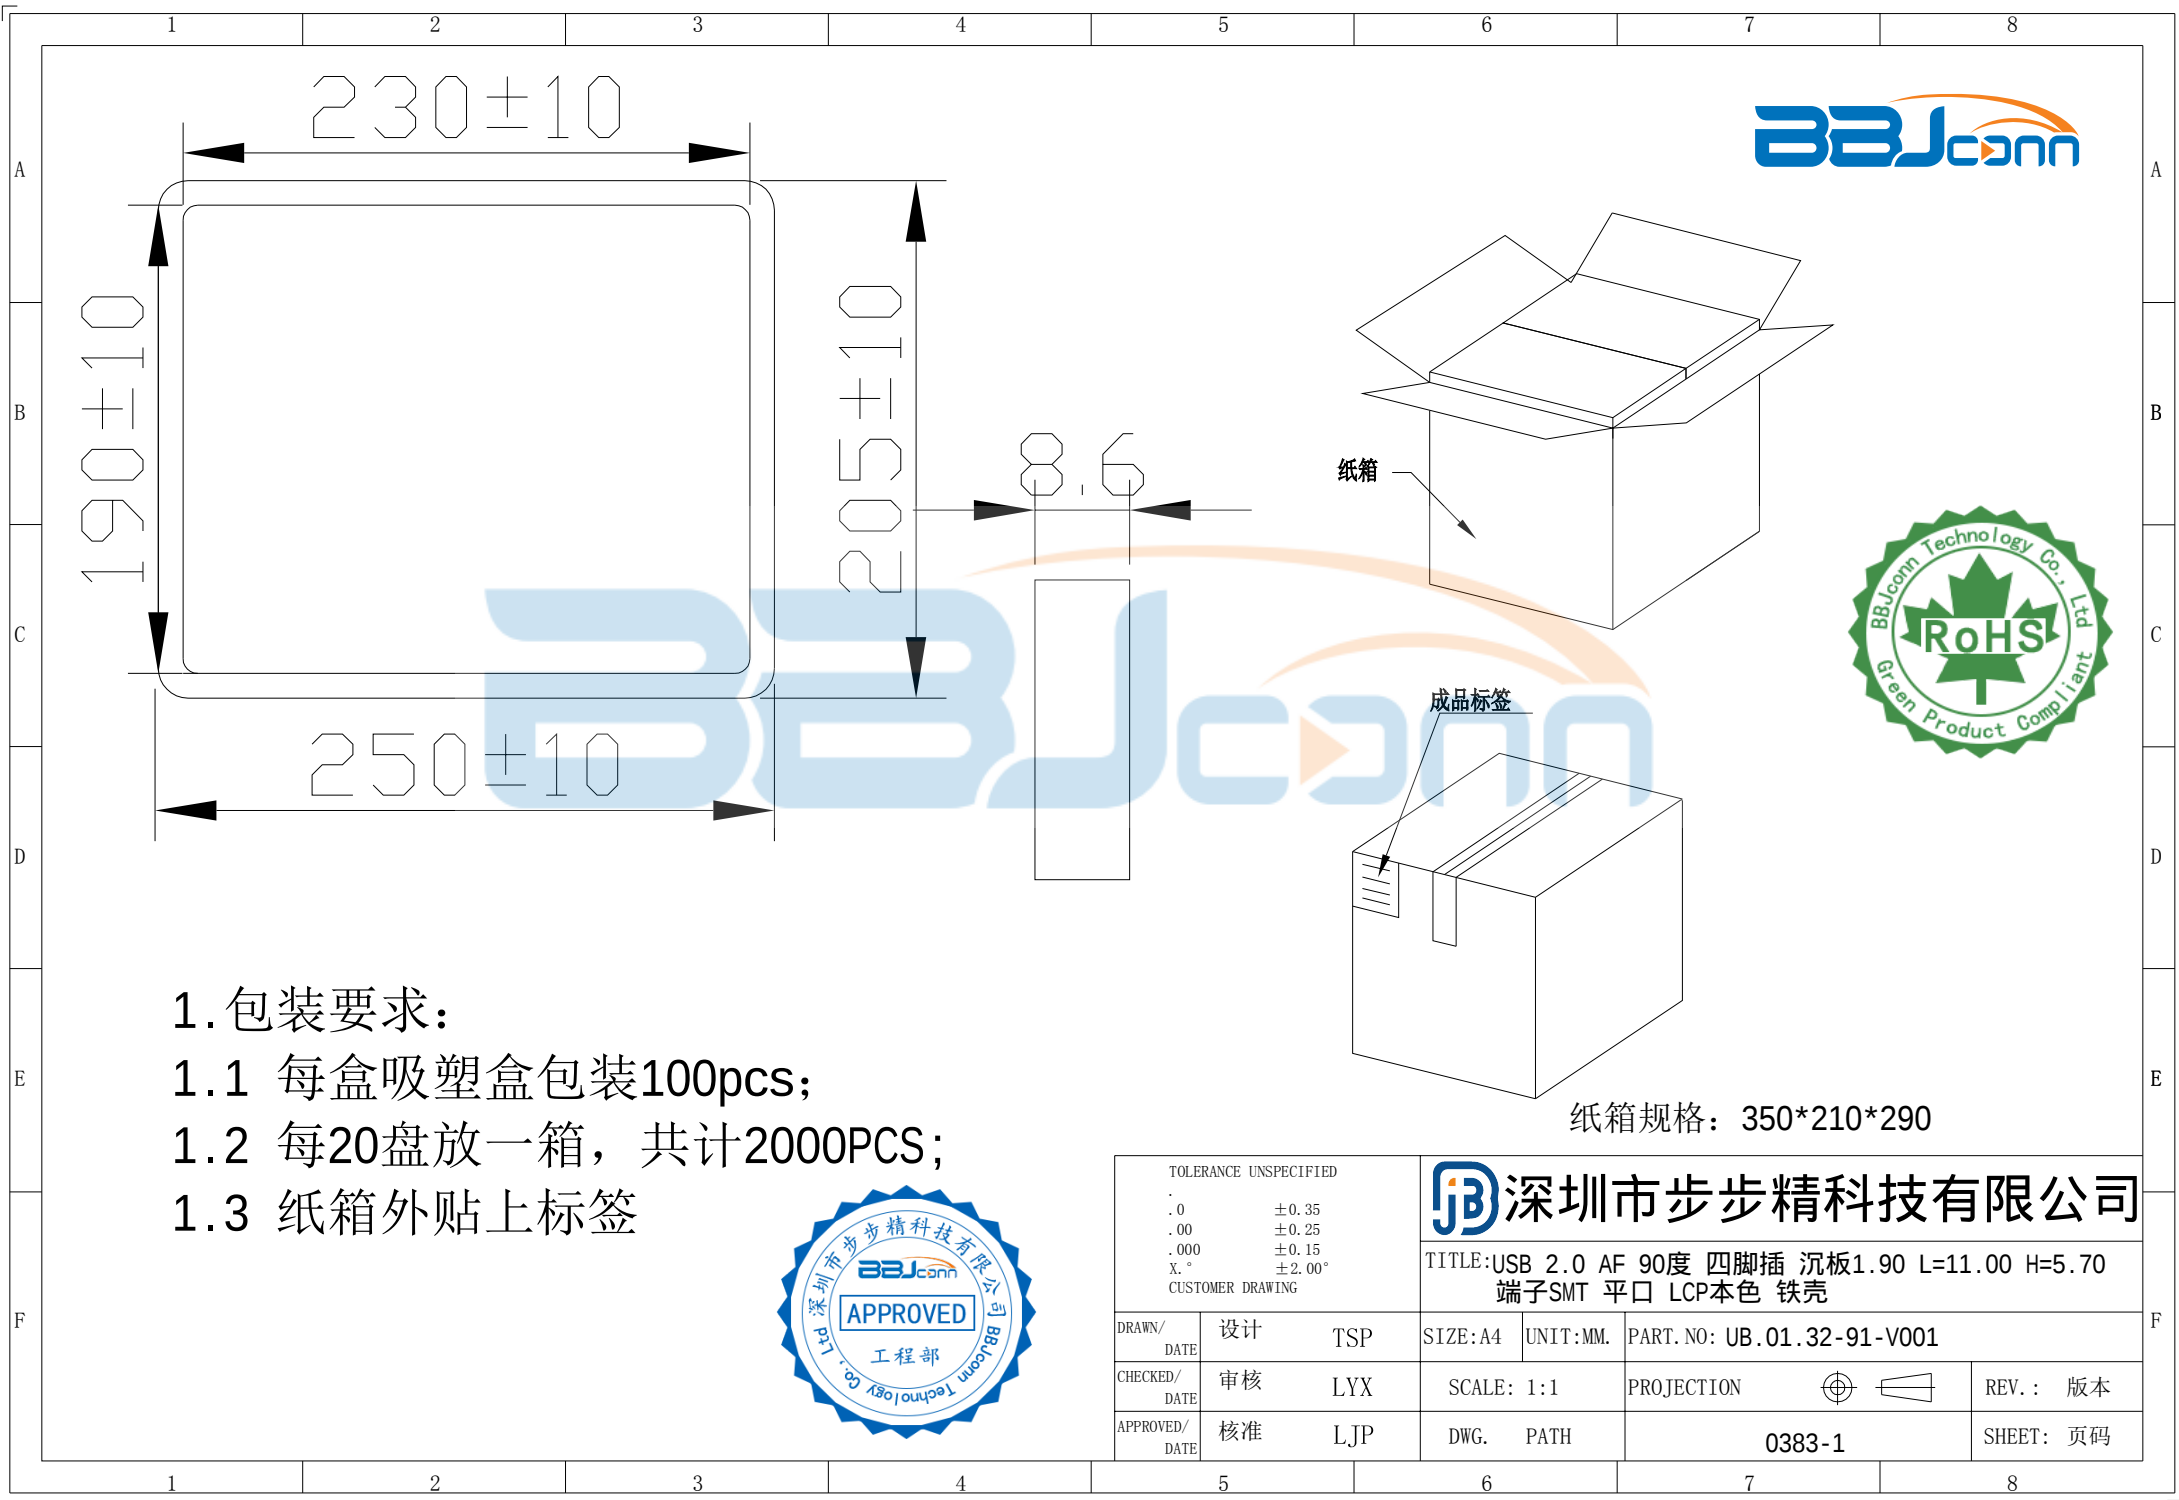

1. 包装要求:

- 1.1 每盒吸塑盒包装100pcs;
- 1.2 每20盘放一箱, 共计2000PCS;
- 1.3 纸箱外贴上标签



TOLERANCE UNSPECIFIED			 深圳市步步精科技有限公司			
.0	±0.35					
.00	±0.25		TITLE:USB 2.0 AF 90度 四脚插 沉板1.90 L=11.00 H=5.70			
.000	±0.15		端子SMT 平口 LCP本色 铁壳			
X.°	±2.00°					
CUSTOMER DRAWING						
DRAWN/ DATE	设计	TSP	SIZE:A4	UNIT:MM.	PART. NO: UB.01.32-91-V001	
CHECKED/ DATE	审核	LYX	SCALE: 1:1		PROJECTION 	REV.: 版本
APPROVED/ DATE	核准	LJP	DWG.	PATH	0383-1	SHEET: 页码