

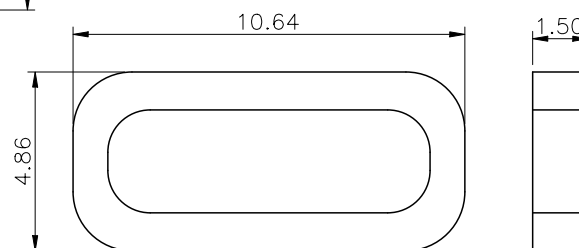

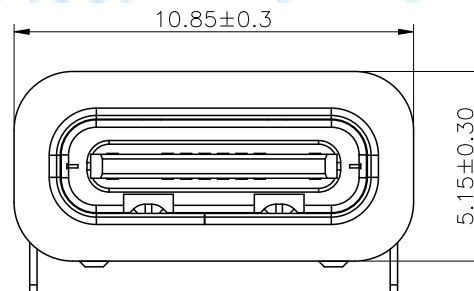
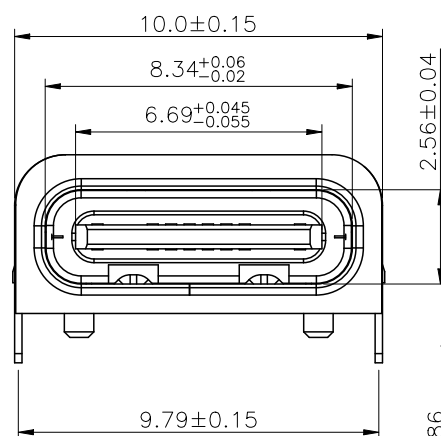
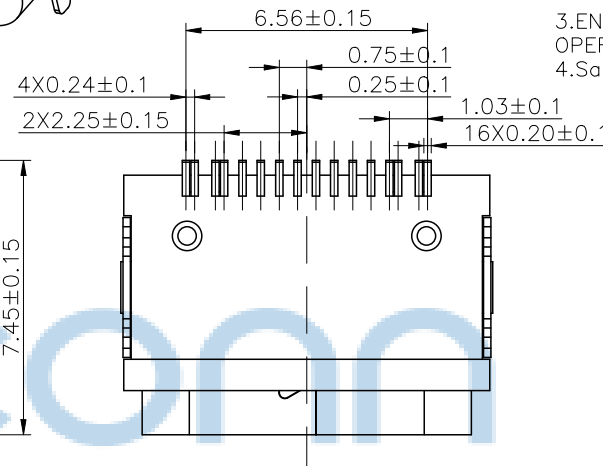
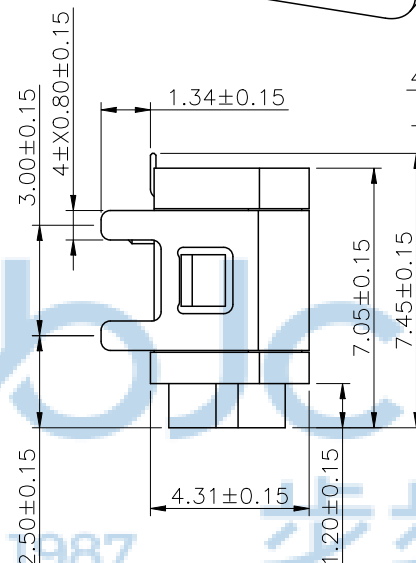
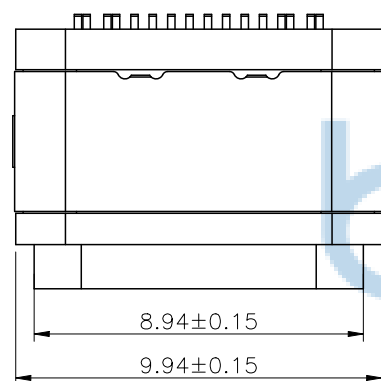


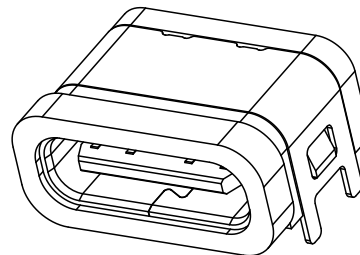

REV	ECN NO	CONTENT	DATE	ENGINEER
A0		INITIAL RELEASE	/	SGF

NOTES:
 1.MECHANICAL:MATING FORCE: 5-20N .
 UNMATING FORCE: 8-20N .
 DURABILITY: 10000 CYCLES MIN.
 2.ELECTRICAL:
 CURRENT: 5.0A MAX
 VOLTAGE: 20V MAX
 WITHSTANDING VOLTAGE: 100V AC
 CONTACT RESISTANCE: 40 mΩ MAX INITIAL;
 50 mΩ MAX AFTER 10000 CYCLES
 3.ENVIRONMENTAL:
 OPERATING TEMPERATURE RANGE -30°C ~ +80°C
 4.Salt Spray:24H

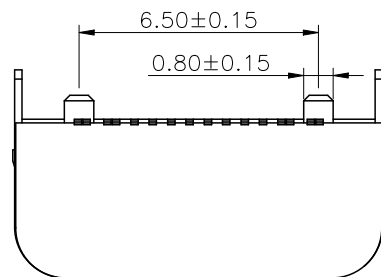

带防水圈示意图



序号	品名	规格
03	中夹片	SUS 301亮镍30u"
02	接地片	SHELL SUS 304 亮镍30u"
01	胶芯	Molding LCP 黑色 C7025 镀金G/F"

THIS DOCUMENT IS THE
 SOLE PROPERTY OF
 BBJconn Technology Co.,Ltd.
 Corporation AND SHOULD
 NOT BE USED IN WHOLE
 PRIOR WRITTEN PERMISSION.

PDWG NO: 0366-2

深圳市步步精科技有限公司

.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	X': ±3" .X': ±2" .XX': ±1"	NAME:TYPE-C 16P 防水母座 板上四脚插 端子SMT 带中夹片 带柱 L=7.05 IPX6 带防水圈 编带
APPD JM_Zheng	CHKD LYX	PJ NO: 126-221-160008-N5G SIZE:A4 DRW NO:
DR SGF		FINISH:SEE NOTES SCALE:N/A REV:A0
		MAT'L:SEE NOTES UNIT:mm PAGE:1/3

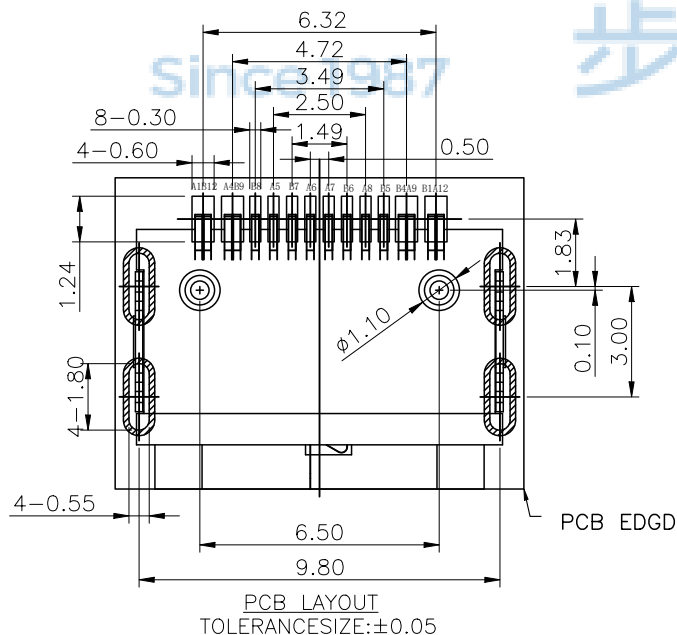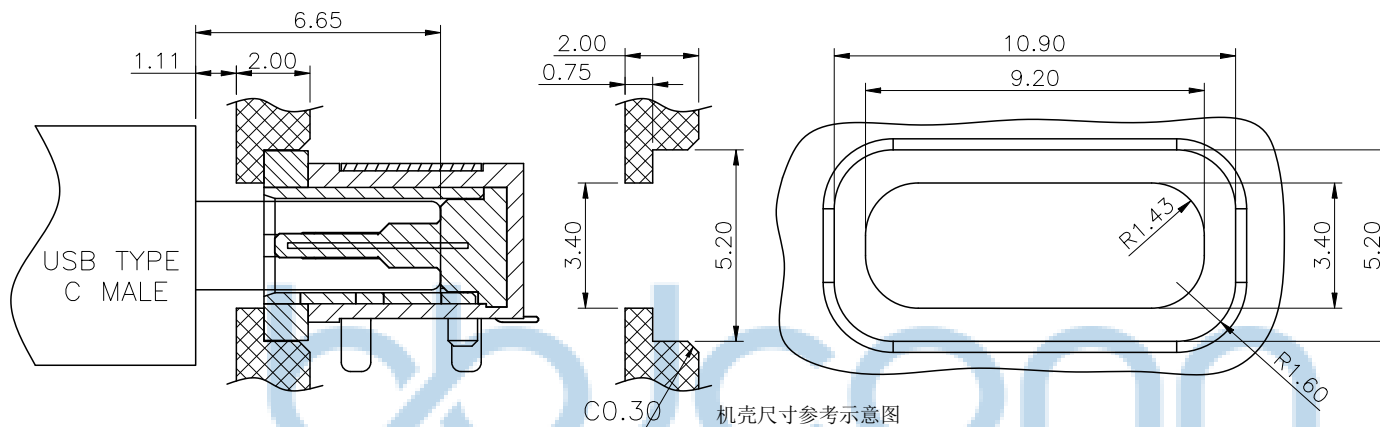


A1	GND	B12	GND
A2		B11	
A3		B10	
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10		B3	
A11		B2	
A12	GND	B1	GND


THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE PRIOR WRITTEN PERMISSION. PDWG NO: 0366-2		深圳市步步精科技有限公司		NAME: TYPE-C 16P 防水母座 板上四脚插 端子SMT 带中夹片 带柱 L=7.05 IPX6 带防水圈 编带	
		.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	X': ±3" .X': ±2" .XX': ±1"	PJ NO: 126-221-160008-N5G	SIZE: A4
APPD	JM_Zheng	FINISH: SEE NOTES		MAT'L: SEE NOTES	
CHKD	LYX	SCALE: N/A		REV: A0	
DR	SGF	UNIT: mm		PAGE: 2/3	

REV	ECN NO	CONTENT	DATE	ENGINEER
AO		INITIAL RELEASE	/	SGF

① 产品入载带示意图

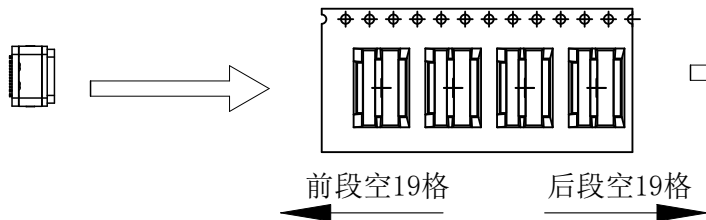


② 卷盘贴标签示意图

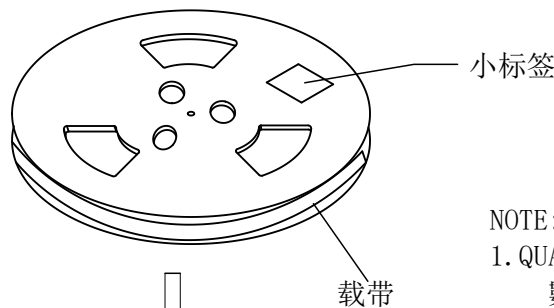



NOTE:

1. QUANTITY/REEL: 700 PCS
数量/卷: 700 PCS
QUANTITY/INNER CARTON: 700 X 10 = 7000 PCS
数量/箱: 700 X 10 = 7000 PCS
2. FREE 19 CAVE IN THE FRONT CARRIER AND FREE 19 CAVE IN THE END CARRIER.
载带前段空19格, 后段空19格

④ 产品入外箱示意图

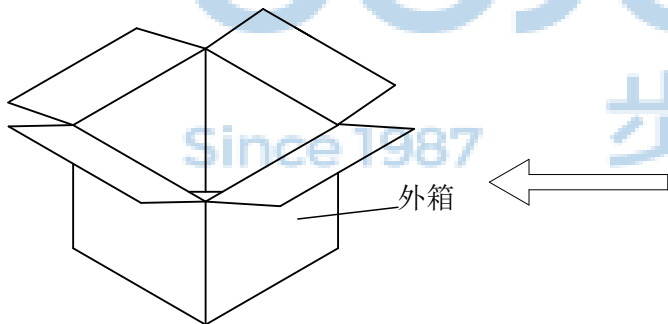

③ 10盘产品叠层示意图

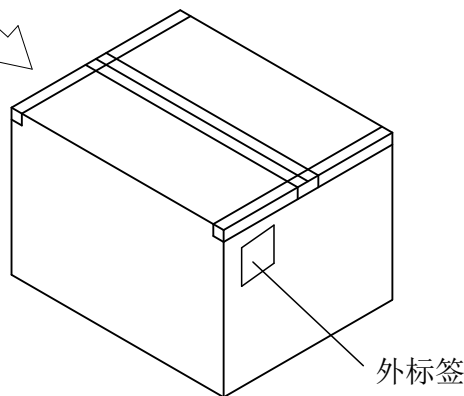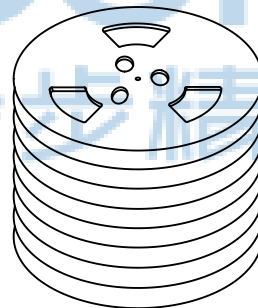

⑤ 外箱封箱示意图

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co., Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.

深圳市步步精科技有限公司

.X: ± 0.38	X': $\pm 3'$	NAME: TYPE-C 16P 防水母座 板上四脚插 端子SMT 带中夹片 带柱 L=7.05 IPX6 带防水圈 编带	
.XX: ± 0.25	.X': $\pm 2'$		
.XXX: ± 0.13	.XX': $\pm 1'$		
APPD	JM_Zheng		PJ NO: 126-221-160008-N5G
CHKD	LYX	SIZE: A4	DRW NO:
PDWG NO: 0366-2	DR	SGF	FINISH: SEE NOTES
			MAT'L: SEE NOTES
			SCALE: N/A
			REV: AO
			UNIT: mm
			PAGE: 3/3