
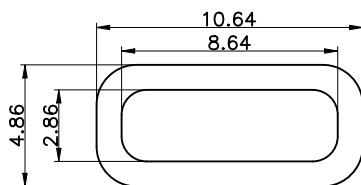
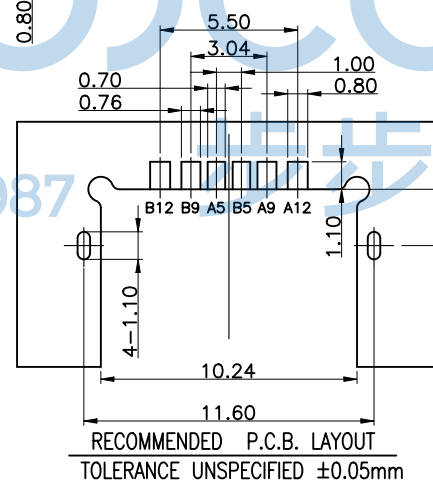
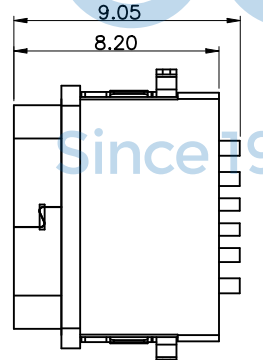




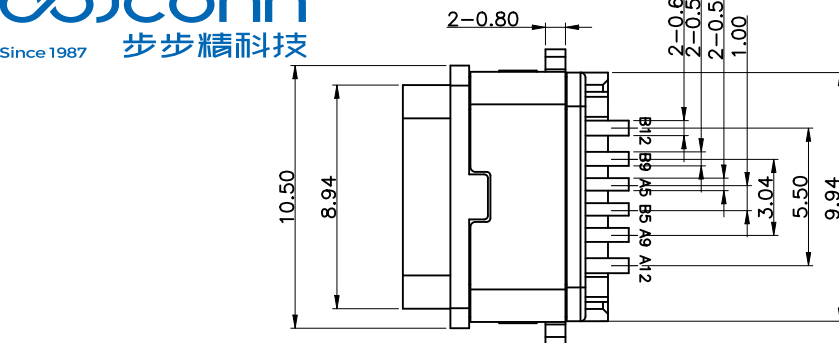


REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	TSP



NOTES:

SPECIFICATION:

1. CURRENT RATING: 3.0A MAX
2. VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: -30 ° C ~ 85 ° C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. LNSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 10,000 CYCLES
9. WATER PROOFNESS:THISPRODUCTIS BASED ON IPX7.



建议的胶圈尺寸

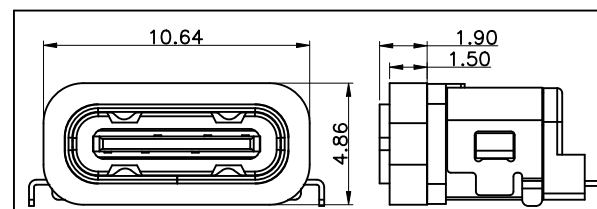

加防水圈示意图

5	SHELL	STAINLESS STEEL	NI Plated	1PCS
4	SHIELDING PLATE	STAINLESS STEEL	NI Plated	1PCS
3	CONTACT	COPPER ALLOY	TIN/Au/NI Plated	1SET
2	SHELL HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
1	HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG,NO: 0523-1



深圳市步步精科技有限公司

.X: ±0.38 X': ±3'
.XX: ±0.25 .X': ±2'
.XXX: ±0.13 .XX': ±1'

NAME:TYPE-C 6P 防水母座 L=8.20 CH=1.68
沉板0.55 两脚插 端子SMT IPX7 带防水圈

APPD. JM_Zheng

PJ. NO.: UC.01.33-1W-0004

CHKD. LYX


SIZE: A4 DRW NO.:

DR. TSP


FINISH: SEE NOTES MAT'L.: SEE NOTES

SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2


A5	CC1	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B5	CC2
PIN	SIGNAL NAME	PIN	SIGNAL NAME





6P防水型四脚



6P防水型两脚



6P防水板上型

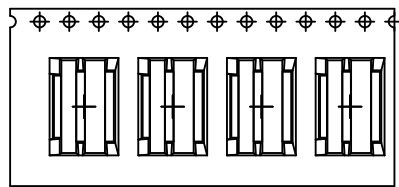


①

产品入载带示意图




②

卷盘贴标签示意图

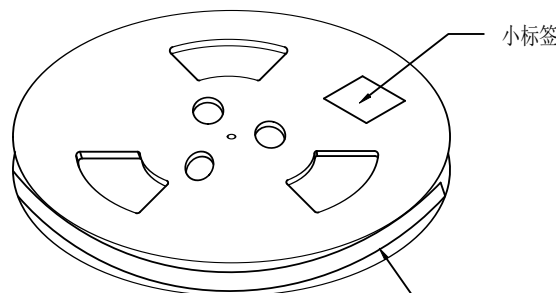


小标签

保护带

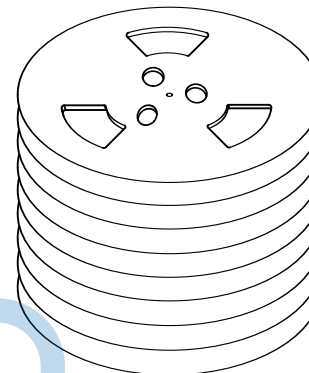


③

10盘产品叠层示意图

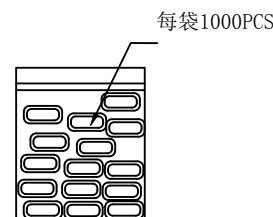

每袋1000PCS

防水圈袋装示意图

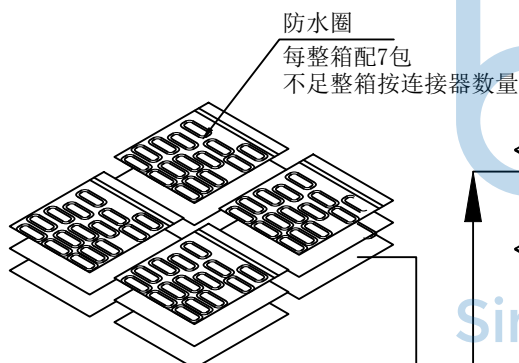

防水圈

每整箱配7包
不足整箱按连接器数量

NOTE:

1. QUANTITY/REEL: 700 PCS

数量/卷: 700 PCS


QUANTITY/INNER CARTON: 700 X 10 = 7000 PCS

数量/箱: 700 X 10 = 7000 PCS

2. FREE 16 CAVE IN THE FRONT CARRIER ADN FREE


16 CAVE IN THE END CARRIER.

包装带内圈空16格,外圈空16格.

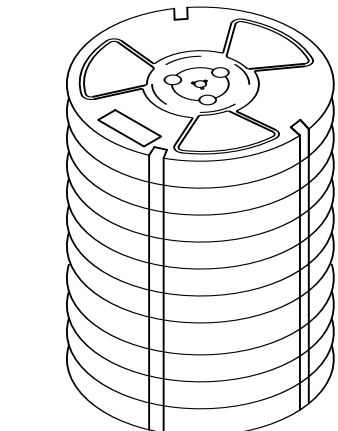


④

产品入外箱示意图

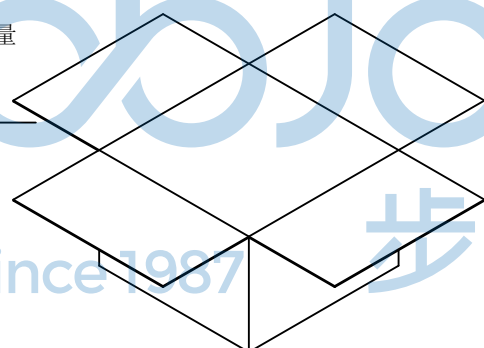

外箱⑥

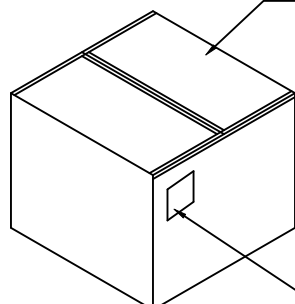

⑤

外箱封箱示意图



1	成品		C F6P防水型沉板母座成品	8000
2	CARRIER TAPE	PET	W=24mm T=0.35mm	——
3	COVER TAPE	PET	W=13.3mm T=0.05mm	——
4	小标签		L102mm*W59mm	10
5	卷盘	PS	ø330MM*W28.5MM	10
6	外标签		L102mm*W102mm	1
7	外箱	A=A	L330mm*W330mm*320mm	1
ITEM	DESC.	MATERIAL	REMARKS	QTY

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. PDWG.NO: 0523-1	 深圳市步步精科技有限公司		NAME:TYPE-C 6P 防水母座 L=8.20 CH=1.68 沉板0.55 两脚插 端子SMT IPX7 带防水圈	
	.X: ±0.38 .X': ±3' .XX: ±0.25 .X': ±2' .XXX: ±0.13 .XX': ±1'		 PJ. NO.: UC.01.33-1W-0004 SIZE: A4 DRW NO.:	
	APPD. JM_Zheng			
	CHKD. LYX			
	DR. TSP		FINISH: SEE NOTES MAT'L.: SEE NOTES SCALE: N/A REV.: A0 UNIT: mm PAGE: 2	