





REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0		Initial release	/	TSP

NOTES:


SPECIFICATION:

1. CURRENT RATING: 3.0A MAX
2. VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: $-30^{\circ}\text{C} \sim 85^{\circ}\text{C}$
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE : $5\text{N} \sim 20\text{N}$
7. UNMATING FORCE: $8\text{N} \sim 20\text{N}$
8. DURABILITY: 10,000 CYCLES
9. WATER PROOFNESS: THIS PRODUCT IS BASED ON IPX7.

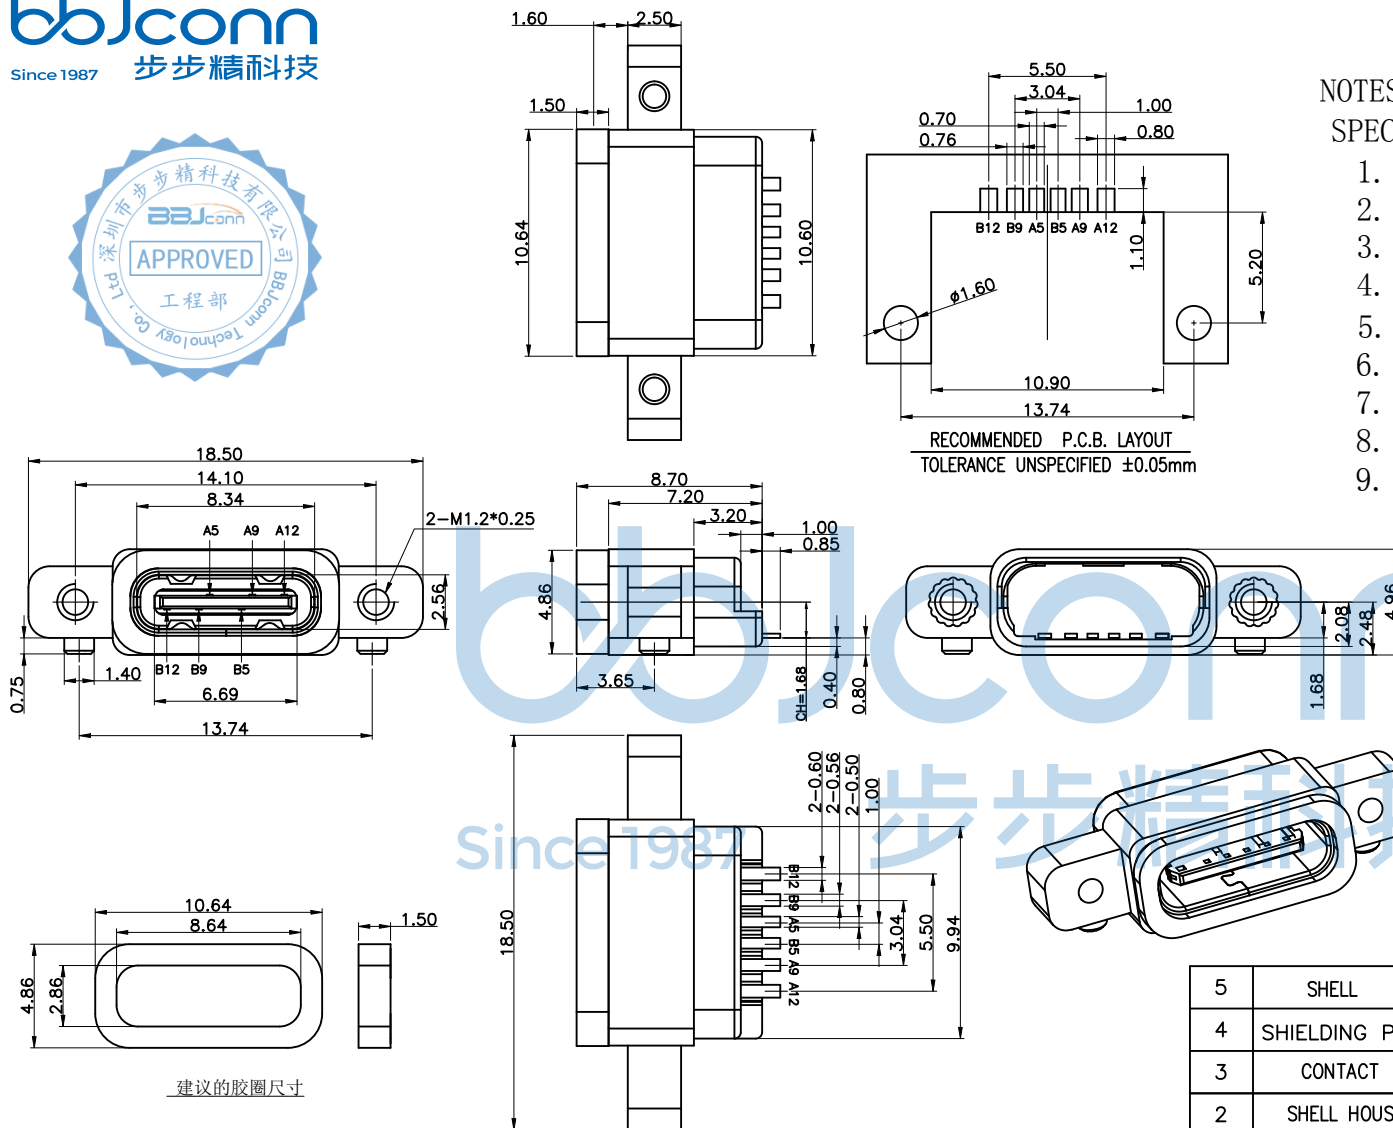

5	SHELL	STAINLESS STEEL	NI Plated	1PCS
4	SHIELDING PLATE	STAINLESS STEEL	NI Plated	1PCS
3	CONTACT	COPPER ALLOY	TIN/Au/NI Plated	1SET
2	SHELL HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
1	HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

A5	CC1	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B5	CC2
PIN	SIGNAL NAME	PIN	SIGNAL NAME

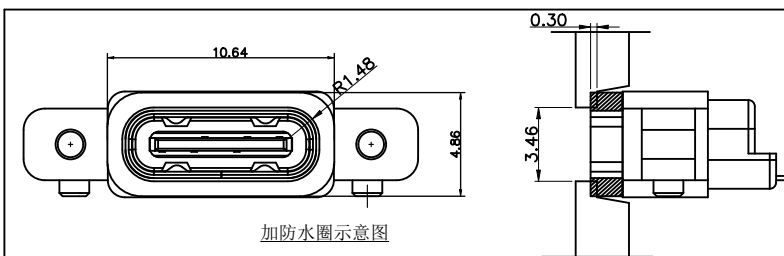

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.

PDWG,NO: 0523-1



深圳市步步精科技有限公司

.X: ± 0.38	X*: $\pm 3^\circ$
.XX: ± 0.25	.X*: $\pm 2^\circ$
.XXX: ± 0.13	.XX*: $\pm 1^\circ$

NAME:TYPE-C 6P 防水母座 L=8.70 CH=1.68 沉板0.80
带双耳螺丝孔 带柱 端子SMT IPX7 带防水圈

APPD.	JM_Zhenc
-------	----------

	PJ. NO.: UC.01.33-1W-0006
---	---------------------------

CHKD	LYY
------	-----

	SIZE: A4	DRW NO.:
---	----------	----------

N. CHRD. LTA		


FINISH: SEE NOTES	MAT'L.: SEE NOTES
-------------------	-------------------

DR.


TSP

SCALE: N/A	REV.: A0	UNIT: mm	PAGE: 1/2
------------	----------	----------	-----------

产品收料方向 产品出料方向

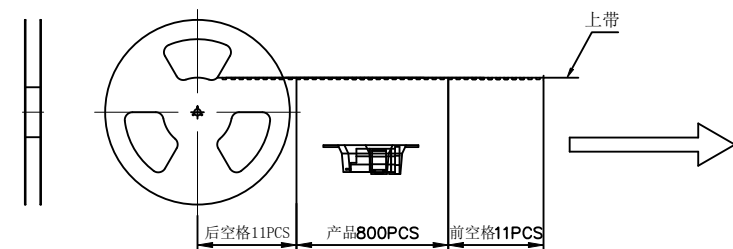

① 产品入载带示意图

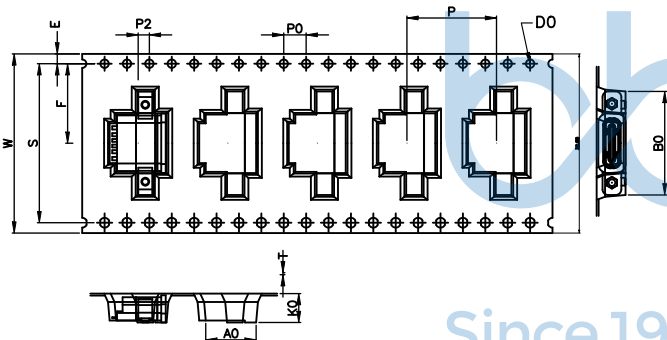


② 卷盘贴标签示意图

③ 8盘产品叠层示意图




NOTE:

1. QUANTITY/REEL: 800 PCS
数量/卷: 800 PCS
QUANTITY/INNER CARTON: 800 X 8 = 6400 PCS
数量/箱: 800 X 8 = 6400 PCS
2. FREE 11 CAVE IN THE FRONT CARRIER ADN FREE 11 CAVE IN THE END CARRIER.
包装带内圈空11格, 外圈空11格.

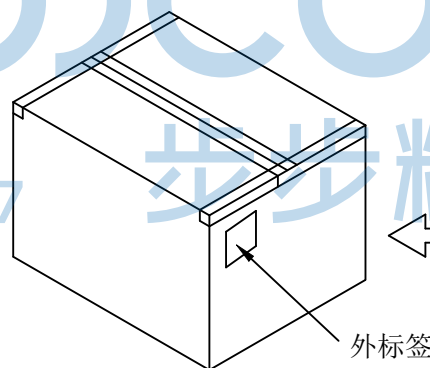

⑤ 外箱封箱示意图

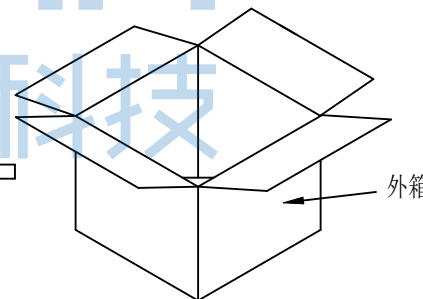

④ 产品入外箱示意图

W	32.00±0.30	P	16.00±0.10
S	28.40±0.10	P0	4.00±0.10
E	1.75±0.10	P2	2.00±0.10
F	14.20±0.10	D0	Ø1.50 ± 0.10
T	0.35±0.05	K0	5.16±0.10
A0	9.00±0.10	B0	18.50±0.10

1	成品		C TYPE母座成品	6400
2	CARRIER TAPE	PET	W=32.0mm T=0.35mm	
3	COVER TAPE	PET	W=25.5mm T=0.05mm	
4	小标签		L102mm*W59mm	8
5	卷盘	PS	Ø330MM*W36.5MM	8
6	天地板	K3K	L320mm*W320mm	2
7	外标签		L102mm*W102mm	1
8	三角柱	K=K	L300mm*W210mm	4
9	外箱	A=A	L330mm*W330mm*320mm	1
ITEM	DESC.	MATERIAL	REMARKS	QTY

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		PDWG, NO: 0523-1		DR. TSP		APPD. JM_Zheng		CHKD. LYX		NAME: TYPE-C 6P 防水母座 L=8.70 CH=1.68 沉板0.80 带双耳螺丝孔 带柱 端子SMT IPX7 带防水圈	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X': ±3' .X': ±2' .XX': ±1'		P. NO.: UC.01.33-1W-0006		SIZE: A4 DRW NO.:		FINISH: SEE NOTES		MAT'L.: SEE NOTES	
SCALE: N/A		REV.: A0		UNIT: mm		PAGE: 2/2					



深圳市步步精科技有限公司