

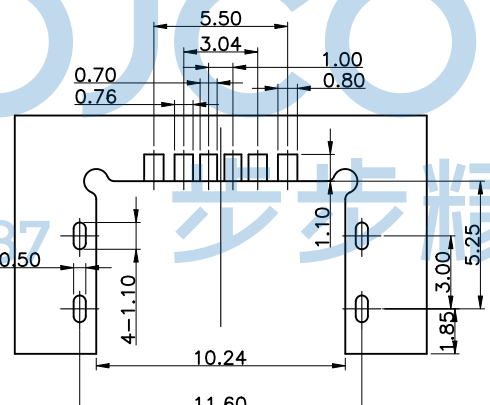
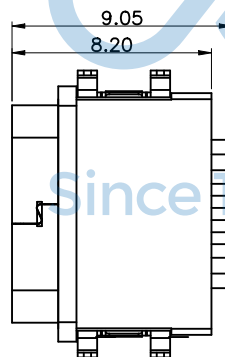


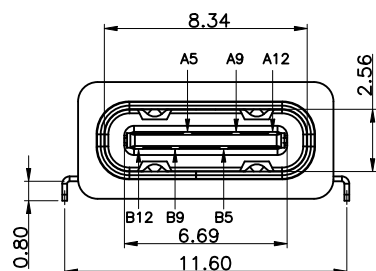



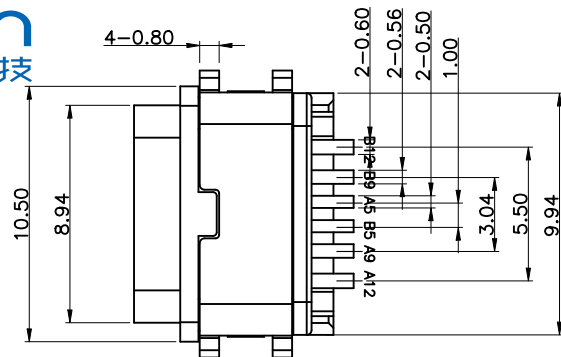


RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED $\pm 0.05\text{mm}$

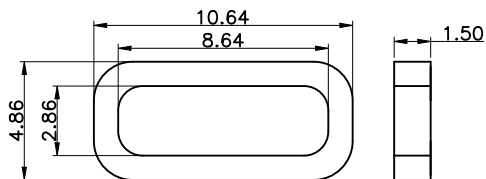

建议的胶圈尺寸

A5	CC1	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B5	CC2
PIN	SIGNAL NAME	PIN	SIGNAL NAME

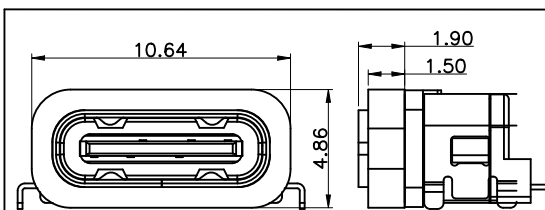


加防水圈示意图

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0				

NOTES:

SPECIFICATION:

- CURRENT RATING: 3.0A MAX
- VOLTAGE: 100 VAC
- TEMPERATURE RANGE: $-30^{\circ}\text{C} \sim 85^{\circ}\text{C}$
- CONTACT RESISTANCE: 40 MILLIONHM MAX
- INSULATION RESISTANCE: 100 MEGOHMS MIN.
- INSERTION FORCE: $5\text{N} \sim 20\text{N}$
- UNMATING FORCE: $8\text{N} \sim 20\text{N}$
- DURABILITY: 10,000 CYCLES
- WATER PROOFNESS: THIS PRODUCT IS BASED ON IPX7.



5	SHELL	STAINLESS STEEL SUS304	NI Plated	1PCS
4	SHIELDING PLATE	STAINLESS STEEL SUS304	NI Plated	1PCS
3	CONTACT	COPPER ALLOY C2680	TIN/Au/NI Plated	1SET
2	SHELL HOUSING	HIGH TEMPERATURE PLASTIC PA9t	BLACK	1PCS
1	HOUSING	HIGH TEMPERATURE PLASTIC PA9t	BLACK	1PCS
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co., Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.



深圳市步步精科技有限公司

.X: ± 0.38 X': $\pm 3'$
.XX: ± 0.25 .X': $\pm 2'$
.XXX: ± 0.13 .XX': $\pm 1'$

NAME: TYPE-C 6P 防水母座 L=8.20 CH=1.68 沉板0.55
四脚插 端子SMT IPX7 带防水圈

APPD. JM_Zheng

PJ. NO.: UC.01.33-1W-0005

CHKD. LYX


SIZE: A4 DRW NO.:

PDWG.NO: 0523-1


DR. TSP

FINISH: SEE NOTES MAT'L.: SEE NOTES


SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2



6P防水型四脚





6P防水型两脚




6P防水板上型

① 产品入载带示意图


防水圈
每整箱配7包
不足整箱按连接器数量

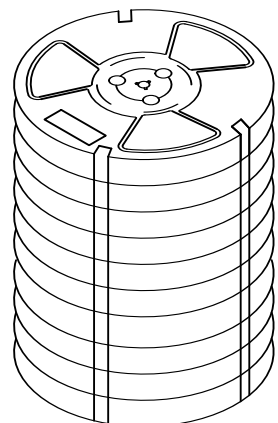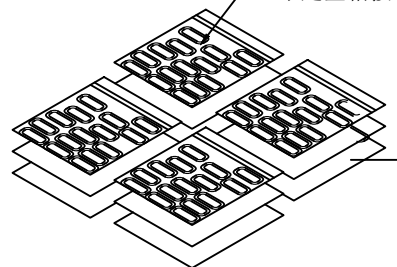

④ 产品入外箱示意图

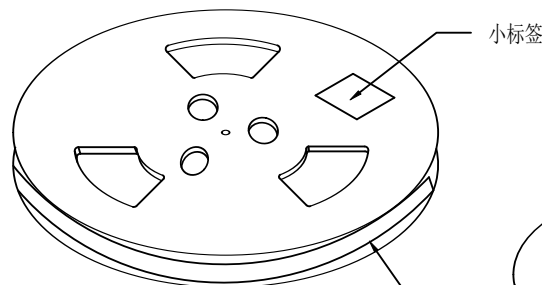


② 卷盘贴标签示意图

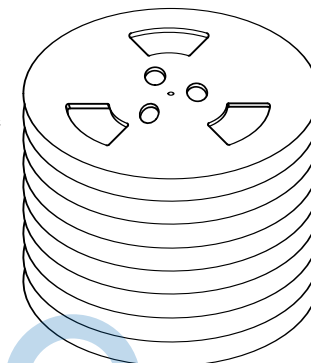

③ 10盘产品叠层示意图




每袋1000PCS



防水圈袋装示意图

NOTE:

1. QUANTITY/REEL: 700 PCS
数量/卷: 700 PCS
QUANTITY/INNER CARTON: 700 X 10 = 7000 PCS
数量/箱: 700 X 10 = 7000 PCS
2. FREE 16 CAVE IN THE FRONT CARRIER AND FREE 16 CAVE IN THE END CARRIER.
包裝帶內圈空16格, 外圈空16格.

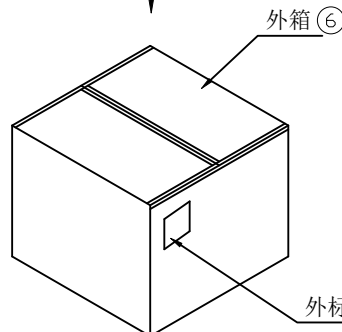

⑤ 外箱封箱示意图

1	成品		C F6P防水型沉板母座成品	8000
2	CARRIER TAPE	PET	W=24mm T=0.35mm	
3	COVER TAPE	PET	W=13.3mm T=0.05mm	
4	小标签		L102mm*W59mm	10
5	卷盘	PS	ø330MM*W28.5MM	10
6	外标签		L102mm*W102mm	1
7	外箱	A=A	L330mm*W330mm*320mm	1
ITEM	DESC.	MATERIAL	REMARKS	QTY

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co., Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG, NO: 0523-1



深圳市步步精科技有限公司

.X: ±0.38 .X*: ±3*
.XX: ±0.25 .X*: ±2*
.XXX: ±0.13 .X*: ±1*

NAME: TYPE-C 6P 防水母座 L=8.20 CH=1.68 沉板0.55
四脚插 端子SMT 1PX7 带防水圈

APPD. JM_Zheng

PJ. NO.: UC.01.33-1W-0005

CHKD. LYX

SIZE: A4 DRW NO.:

DR. TSP

FINISH: SEE NOTES MAT'L.: SEE NOTES

SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2