


REV.	ECN NO.	CONTENT	DATE	ENGINEER
AO		INITIAL RELEASE	2023 11/28	Yan

NOTES:

- 电气特性:  
耐压: 100V AC/60S/0.5mA  
绝缘阻抗: 100MΩ/MIN,500V DC/MIN  
接触阻抗: 40mΩ/MAX(VBUS/GND)测试后变化10mΩ;  
额定电流: 2A 温度: 30°/MAX
- 机械物性:  
插入力: 5~20N  
拔出力: 8~20N,测试后拔出力6~20N;  
耐久次数: 10000次
- 产品物料及制程符合“Rohs”文件对环境管理标准。

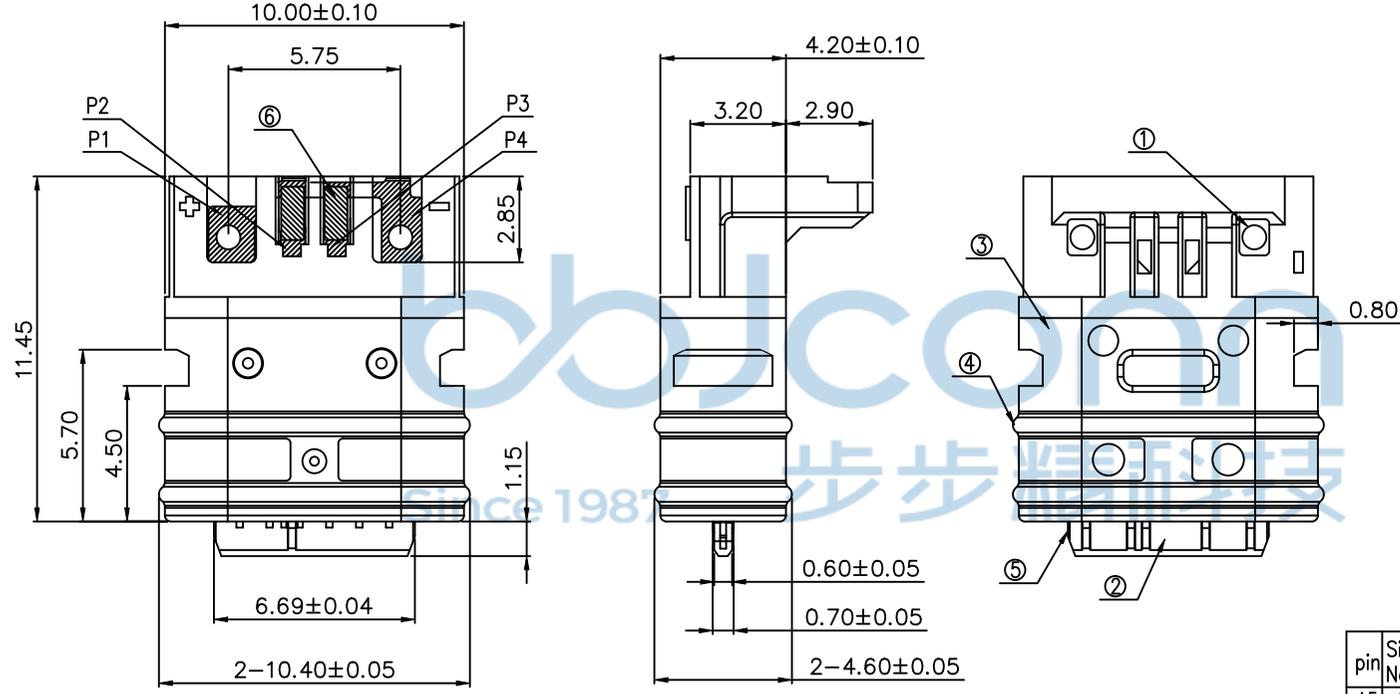


PIN DEFINE

pin	Signal Name	Description	Mating Sequence	pin	Signal Name	Description	Mating Sequence
A5	CC1	Configuration channel	Second	B1	GND	Ground return	First
				B4	VBUS	Bus Power	First
				B5	CC1	Configuration channel	Second
				B9	CC1	Bus Power	First
				B12	CC1	Ground return	First

PIN DEFINE

CONN PIN	PCB PIN
B4 B9(VBUS)	P1正极
A5(CC) 5.1KΩ电阻	P2
B5(CC) 5.1KΩ电阻	P3
B1 B12(GND)	P4负极

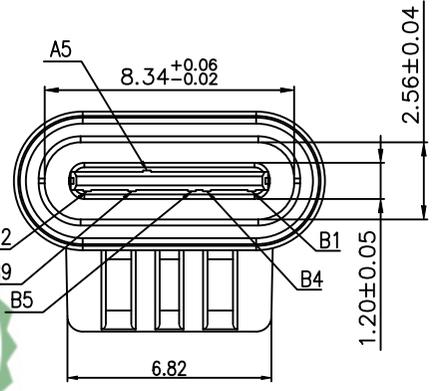

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. PDWG,NO: 9999-9


深圳市步步精科技有限公司

NAME: TYPE C 6P 防水 线端 有电阻 带凸台

P/N: 126-229-060001-00G  
SIZE: A4 | DRW NO.: AS23-0004  
FINISH: SEE NOTES | MAT'L.: SEE NOTES  
SCALE: N/A | REV.: AO | UNIT: mm | PAGE: 1/2


REV.	ECN NO	CONTENT	DATE	ENGINEER
AO		Initial release		Yan

PE袋规格: 260\*185

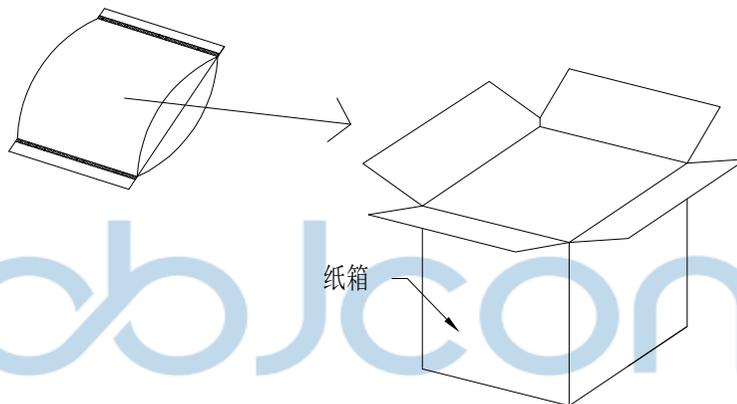

纸箱

成品标签



1. 包装要求:

- 1.1 每个PE袋包装1000pcs;
- 1.2 每15袋一个纸箱, 共计15000pcs;
- 1.3 纸箱外贴上标签

纸箱规格: 33.5\*33.5\*19CM



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		 <b>深圳市步步精科技有限公司</b>	
PDWG:NO: 9999-9		APPD. CHKD. DR. Yan	NAME: TYPE C 6P 防水 线端 有电阻 带凸台 PJ. NO.:126-229-060001-00G SIZE: A4   DRW NO.: XX FINISH: SEE NOTES   MAT'L.: SEE NOTES SCALE: N/A   REV.: AO   UNIT: mm   PAGE: 2/2
.X: ±0.38	X': ±3'		
.XX: ±0.25	.X': ±2'		
.XXX: ±0.13	.XX': ±1'		