

NOTES:

1.电气特性:

耐压: 100V AC/60S/0.5mA

绝缘阻抗: 100M Ω /MIN,500V DC/MIN

接触阻抗: 40m Ω /MAX(VBUS/GND)测试后变化10m Ω ;

额定电流: 2A 温度: 30°/MAX

2.机械物性:

插入力: 5~20N

拔出力: 8~20N,测试后拔出力6~20N;

耐久次数: 10000次


5.产品物料及制程符合“Rohs”文件对环境管理标准。

PIN DEFINE

pin	Signal Name	Description	Mating Sequence	pin	Signal Name	Description	Mating Sequence
A5	CC1	Configuration channel	Second	B1	GND	Ground return	First
				B4	VBUS	Bus Power	First
				B5	CC1	Configuration channel	Second
				B9	CC1	Bus Power	First
				B12	CC1	Ground return	First



5	中夹片	1 PCS	SUS301
4	MOLDING密封圈	1 PCS	TPE,BLACK,60度
3	MOLD 2	1 PCS	PA10T,BLACK
2	MOLD 1	1 PCS	PA46,BLACK
1	Teaminal	1 PCS	C7025 T=0.2mm,Au:1u",Sn:80u"
序号	零件	数量	规格

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. PDWG.NO: 9999-9				 深圳市步步精科技有限公司 NAME: TYPE C 6P 防水母座 线端 无电阻 无凸台 P/N.: 526-22A-406C02-00G SIZE: A4 DRW NO.: AS23-0003 FINISH: SEE NOTES MAT'L.: SEE NOTES SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/1			
.X: ± 0.38 .XX: ± 0.25 .XXX: ± 0.13		X*: $\pm 3^{\circ}$ X*: $\pm 1^{\circ}$ X*: $\pm 1^{\circ}$		APPD.  P/N.: 526-22A-406C02-00G			
CHKD.		DR.		Yan 2023/11/28			

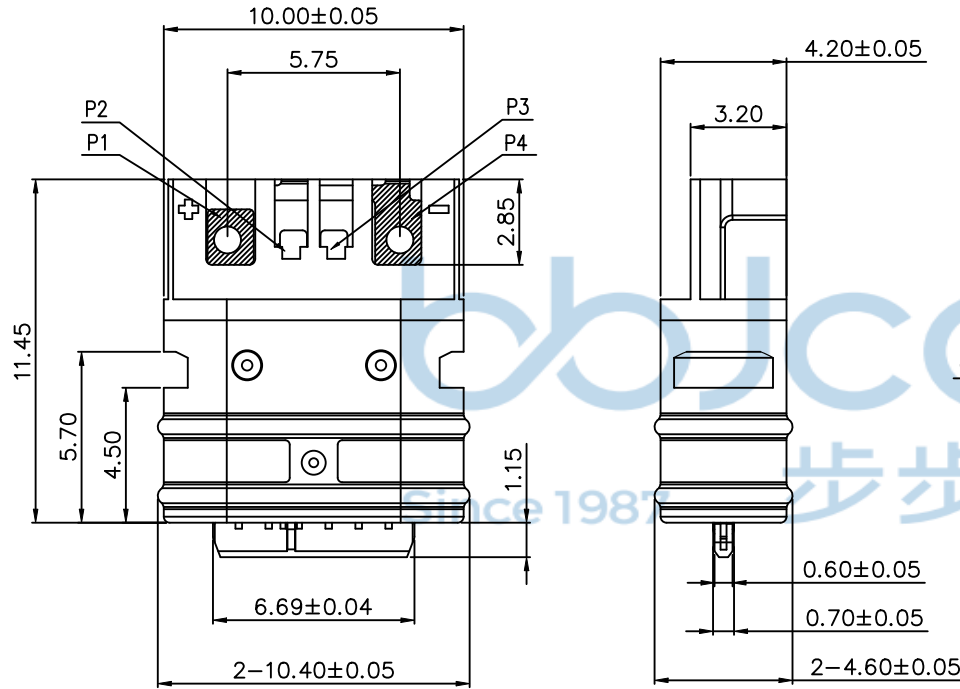

REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0		Initial release		Yan

PE袋规格: 260*185

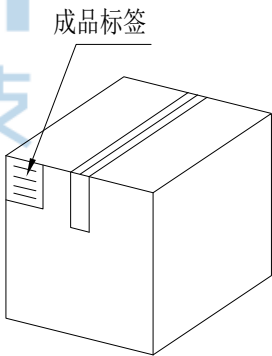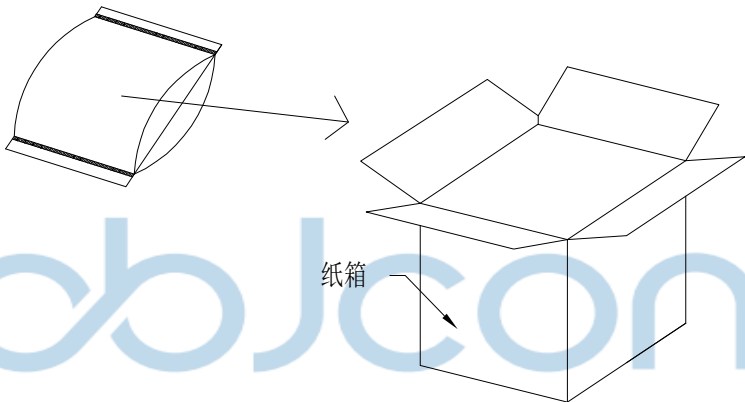

1. 包装要求:
- 1.1 每个PE袋包装1000pcs;
 - 1.2 每15袋一个纸箱, 共计15000pcs;
 - 1.3 纸箱外贴上标签

纸箱规格: 33.5*33.5*19CM



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X": ±3" .X": ±2" .XX": ±1"	
NAME:		TYPE C 6P 防水母座 线端 无电阻 无凸台	
APPD.		PJ. NO.: 526-22A-406C02-00G	
CHKD.		SIZE: A4 DRW NO.: XX	
PDWG.NO: 9999-9		FINISH: SEE NOTES MAT'L.: SEE NOTES	
DR.		SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2	