

Specifications:

Voltage: 30V AC,DC

Current: 0.5A AC,DC

Contact Resistance: $20m\Omega$ /max

Dielectric Withstanding Voltage: 200V AC/rms

Insulation Resistance: $100M\Omega$ /Min.

Operating Temp.: $-25^{\circ}C \sim +85^{\circ}C$




Pin Material: Phosphor Bronze/Matte Tin-Plated or Gold-flash or Gold-plated 3u"

Solder Tabs: Phosphor Bronze/Matte Tin-plated or Gold-flash






Plastic material: LCP UL 94V-0

Ordering Information & Dimensions

Poles	Dimensions (mm)			
	A	B	C	D
2	0.80	3.80	1.90	2.38
3	1.60	4.60	2.70	3.18
4	2.40	5.40	3.50	3.98
5	3.20	6.20	4.30	4.78
6	4.00	7.00	5.10	5.58
7	4.80	7.80	5.90	6.38
8	5.60	8.60	6.70	7.18
9	6.40	9.40	7.50	7.98
10	7.20	10.20	8.30	8.78
11	8.00	11.00	9.10	9.58
12	8.80	11.80	9.90	10.38
13	9.60	12.60	10.70	11.18
14	10.40	13.40	11.50	11.98
15	11.20	14.20	12.30	12.78
16	12.00	15.00	13.10	13.58

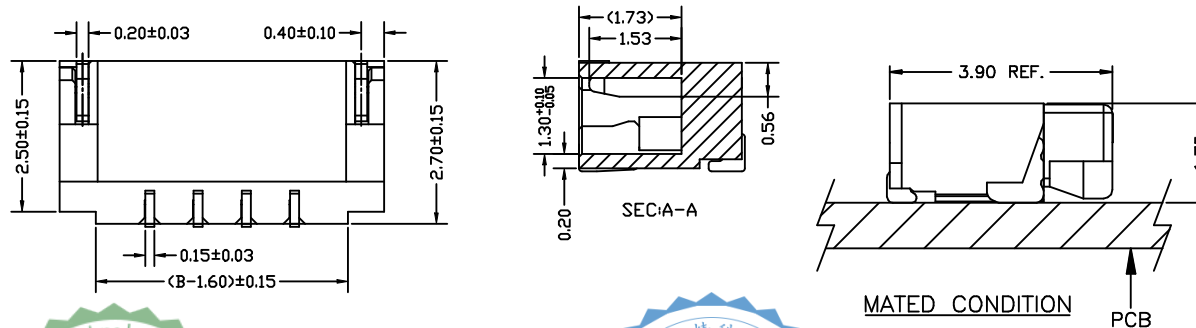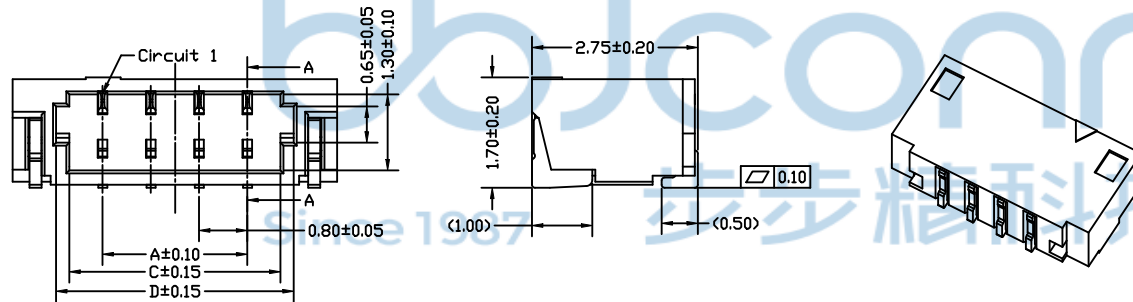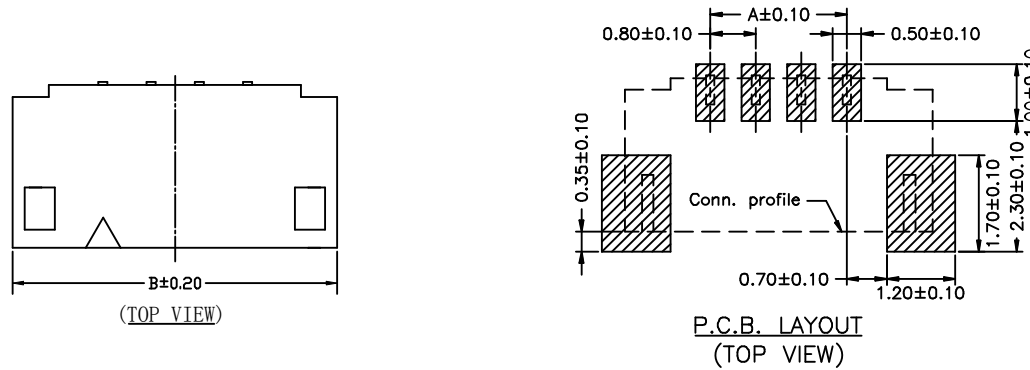

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
PDWG,NO: 0787-1	APPD. JM_Zheng	NAME: 针座 0.8-2P 刺破式 卧贴 米黄色 镀金 编带	PJ. NO.: 123-231-020001-V3G
	CHKD. TSP	SIZE: A4	DRW NO.:
	DR. LYX	FINISH: SEE NOTES	MAT'L.: SEE NOTES
		SCALE: N/A	REV.: A0 UNIT: mm PAGE: 1/2

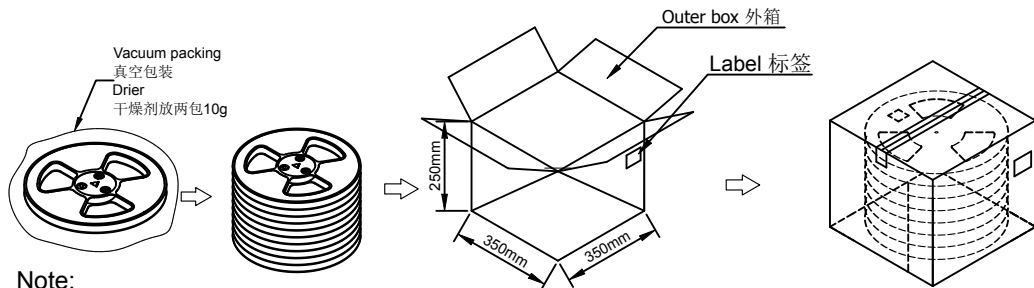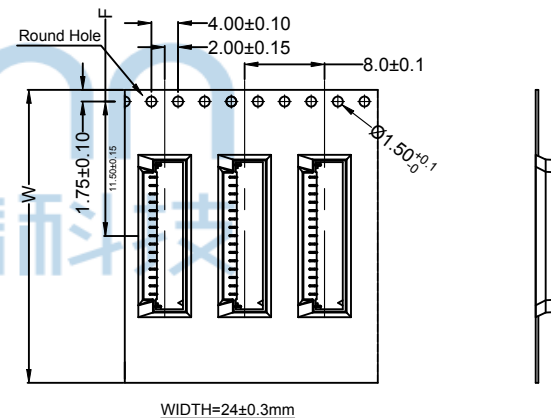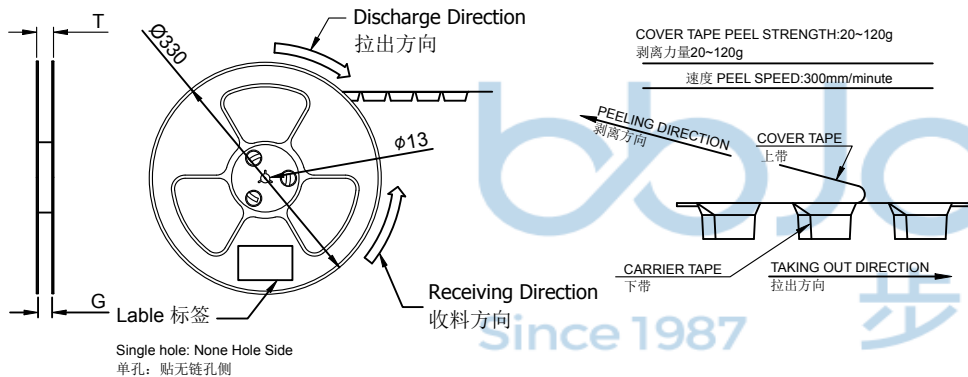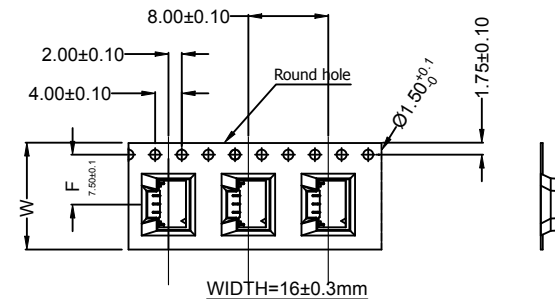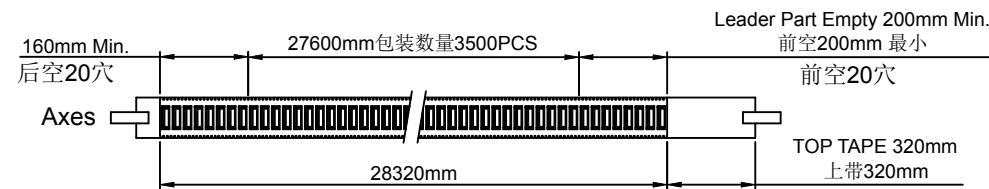

Note:

1. Carrier Camber Is Within 1mm In 100mm ; 带长100mm 内容许弯曲度1mm
2. 10 Sprocket Hole Pitch Cumulative Tolerance±0.2MM ; 圆孔十个孔距离累计允许公差为±0.2mm
3. Material for PS ; 材质为PS材质; Color颜色: Black黑色
4. bracer保护带: Color颜色: Black黑色; 厚度0.40mm 最小
5. Thickness=0.40±0.05 ; 材料厚度为0.40±0.05mm
6. Cover Tape 上带: 冷封
7. 接触产品的位置材质需要防静电 (包括载带/载盘/上带)
8. Carton material 纸箱材质: K=K; Carton Thickness 纸箱厚度: 6~7mm



Carrier Tape No. 载带料号	W	S	F	T	G	REEL /PCS	CARTON /R
2P	16	/	7.50	20.50	16.50	3500	10R
3P							
4P							
5P							
6P							
8P	24	/	11.50	28.50	24.50	3500	6R
9P							
10P							
11P							
12P							
13P							
14P							
15P							
16P							

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司 工程管理部		NAME: 针座 0.8-2P 刺破式 卧贴 米黄色 镀金 编带 PJ. NO.: 123-231-020001-V3G SIZE: A4 DRW NO.: FINISH: SEE NOTES MAT'L.: SEE NOTES SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2	
APPD.	JM_Zheng	CHKD.	TSP	DR.	LYX
PDWG. NO: 0787-1					

