



REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0		Initial release	/	TSP

技术指标:

1. 塑件表面应光洁、无毛边、无明显收缩、缺陷、裂纹等现象.
2. 温度范围: $-25^{\circ}\text{C}\sim 85^{\circ}\text{C}$.
3. 额定电压: 50V AC, DC.
4. 耐电压: 500V AC/minute.
5. 接触电阻: $\leq 20\text{m}\Omega$.
6. 绝缘电阻: $\geq 100\text{M}\Omega$.
7. 额定电流: 1.5A AC, DC.

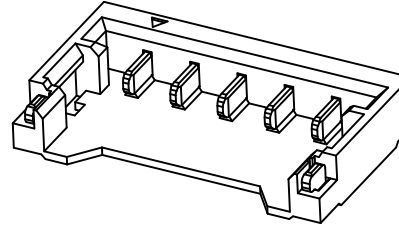


CKT	DIM A	DIM B	DIM C	DIM D
2	4.20	1.20	2.65	3.64
3	5.40	2.40	3.85	4.84
4	6.60	3.60	5.05	6.04
5	7.80	4.80	6.25	7.24
6	9.00	6.00	7.45	8.44
7	10.20	7.20	8.65	9.64
8	11.40	8.40	9.85	10.84
9	12.60	9.60	11.05	12.04
10	13.80	10.80	12.25	13.24
11	15.00	12.00	13.45	14.44
12	16.20	13.20	14.65	15.64

序号	品名	材质
①	1.2 Pitch B型电池座胶芯	LCP UL94V-0 黑色
②	1.2 Pitch B型电池座端子	铜合金/表面镀锡/镀金
③	1.2 Pitch B型电池座焊片	铜合金/表面镀锡/镀金

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG.NO: 0456-1

深圳市步步精科技有限公司	
NAME: Molex 针座 B型 1.20-2P 卧贴 黑色 镀金GF	
APPD. JM_Zheng	PJ. NO.: 143-011-000001-X3G
CHKD. LYX	SIZE: A4 DRW NO.:
DR. TSP	FINISH: SEE NOTES MAT'L.: SEE NOTES
	SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2

适用线路板 (PCB LAYOUT)

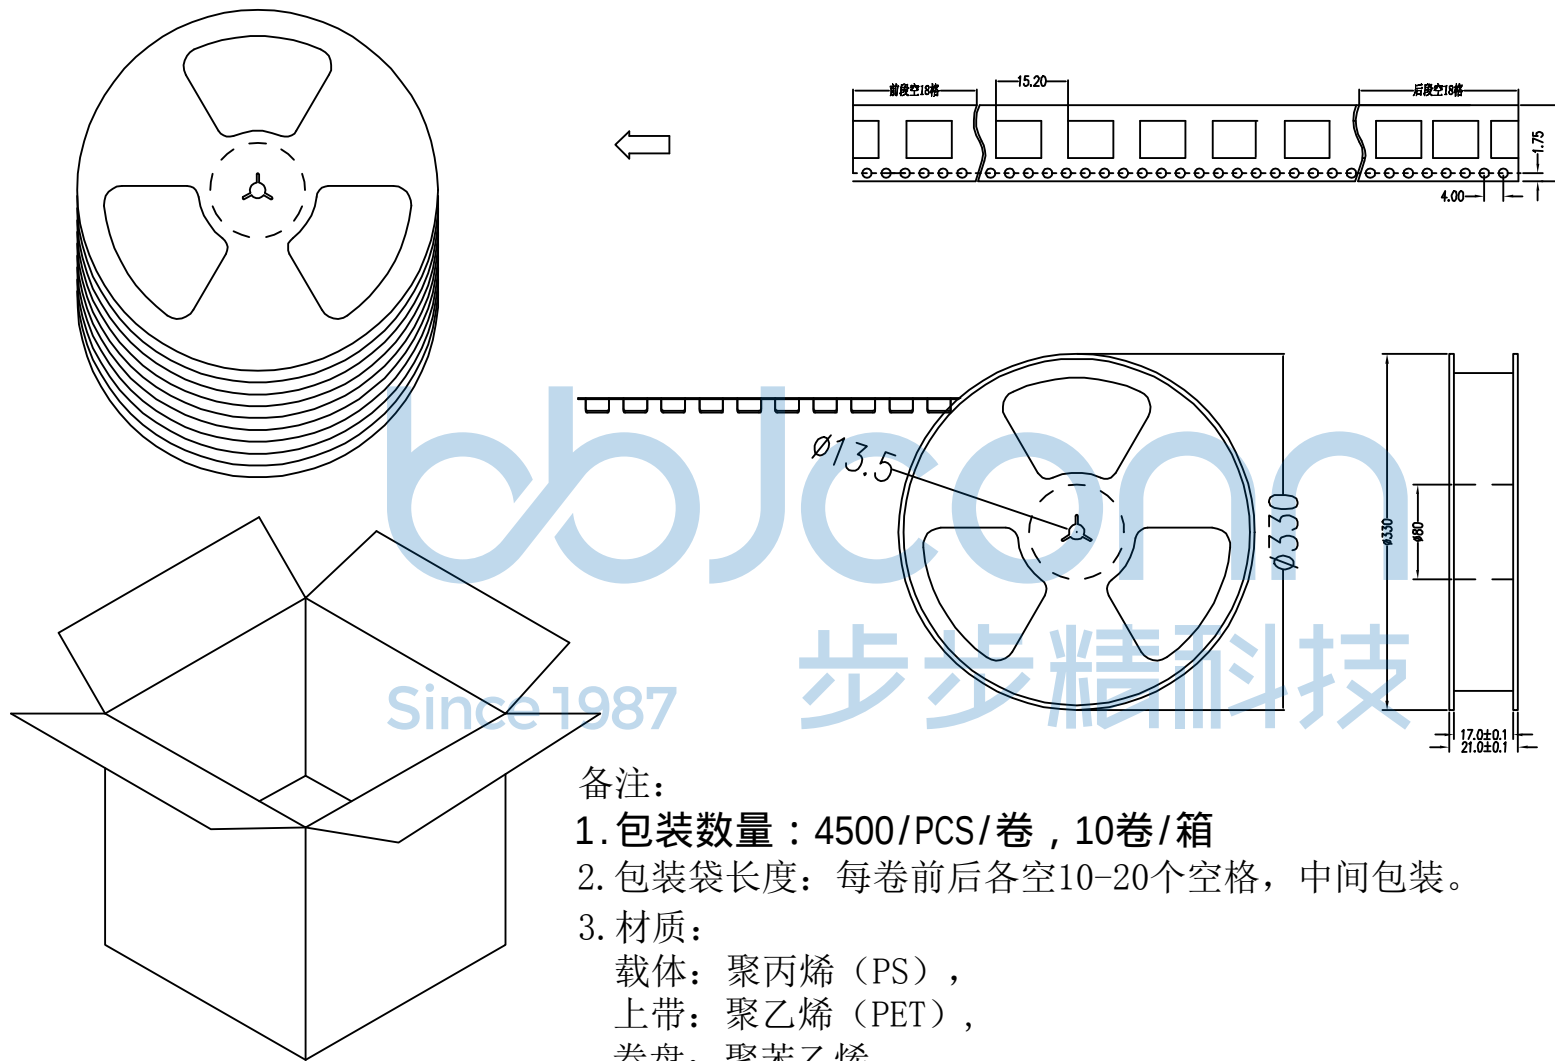

备注:

1. 包装数量: 4500/PCS/卷, 10卷/箱
2. 包装袋长度: 每卷前后各空10-20个空格, 中间包装。
3. 材质:
载体: 聚丙烯 (PS),
上带: 聚乙烯 (PET),
卷盘: 聚苯乙烯。

纸箱规格: 345*345*23MM

纸箱规格: 345*345*35MM

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X": ±3" .X": ±2" .XX": ±1"	
APPD.	JM_Zheng	NAME: Molex 针座 B型 1.20-2P 卧贴 黑色 镀金GF	
CHKD.	LYX	PJ. NO.: 143-011-000001-X3G	
PDWG.NO:	0456-1	SIZE: A4 DRW NO.:	
DR.		FINISH: SEE NOTES MAT'L.: SEE NOTES	
		SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2	