

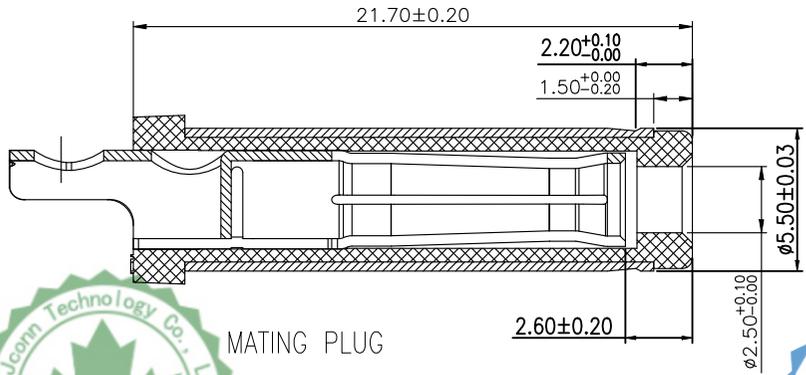
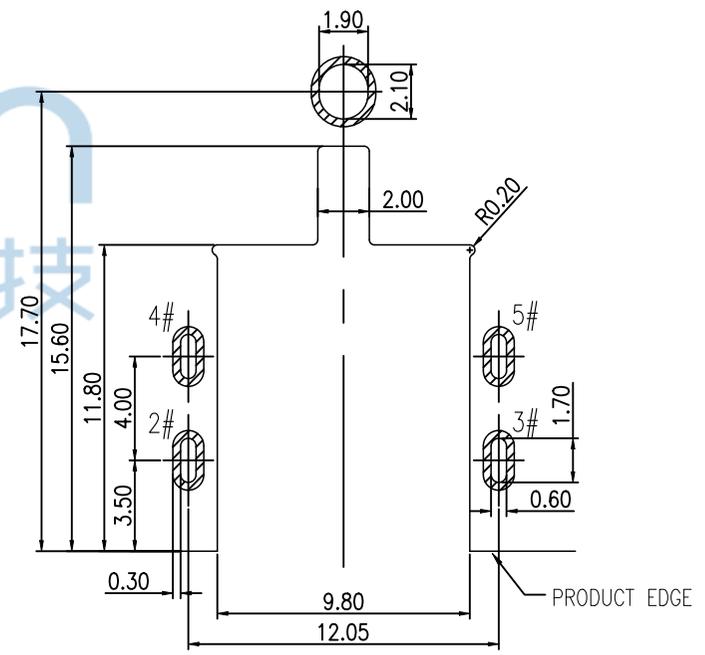
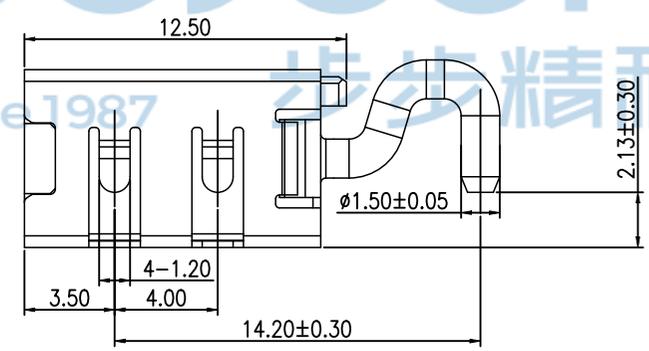
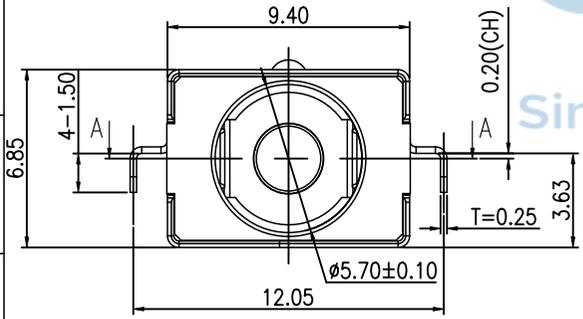
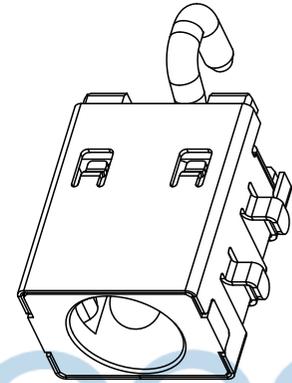
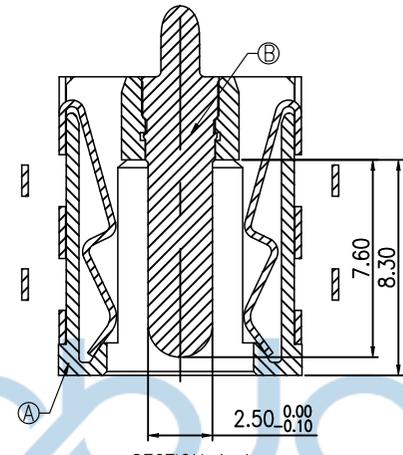


REV	ECN NO	CONTENT	DATE	ENGINEER
AO		INITIAL RELEASE	/	LYX

SPECIFICATION:

1. RATING: DC 30V 15A
2. CONTACT RESISTANCE:  
30mΩ MAX(INITIAL).  
50mΩ MAX(FINAL).
3. INSULATION RESISTANCE: 100 MΩ MIN.
4. WITHSTAND VOLTAGE: 500 VAC
5. INSERTION FORCE: 30N MAX.
6. EXTRACTION FORCE: 3N MIN.
7. DURABILITY: 5,000 CYCLES

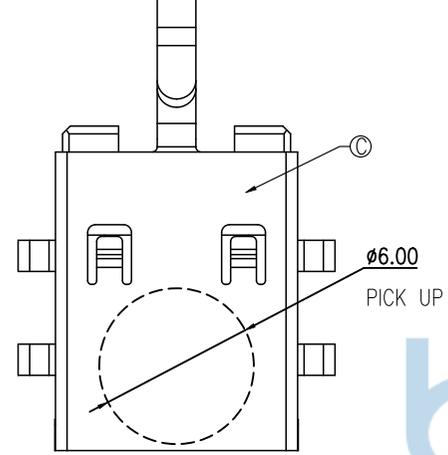

NO.	DESCRIPTION	MATERIAL	REMARKS	QTY
C	SHELL	C5210	Ni 40u" MIN.	1
B	CENTER PIN	BRASS	GOLD FLASH /Ni 40u" MIN.	1
A	HOUSING	PA10T	BLACK	1



MATING PLUG





THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE PRIOR WRITTEN PERMISSION.  
PDWG NO:0386-2

**深圳市步步精科技有限公司**

NAME: DC座 DC-2.5针 CH=0.20 全铜 沉板3.63 四脚插 带弯钩 电流15A 编带
 PJ NO: 116-309-040001-P1G  
 SIZE:A4 DRW NO:  
 FINISH:SEE NOTES MAT'L:SEE NOTES  
 SCALE:N/A REV:A0 UNIT:mm PAGE:1/2


APPD	JM_Zheng
CHKD	Tang
DR	LYX

REV	ECN NO	CONTENT	DATE	ENGINEER
A0		INITIAL RELEASE	/	LYX

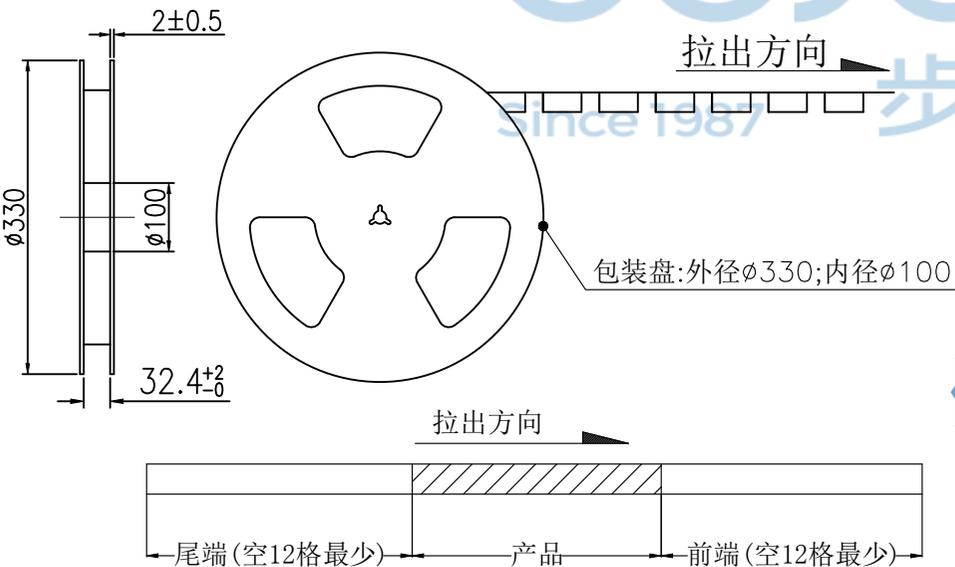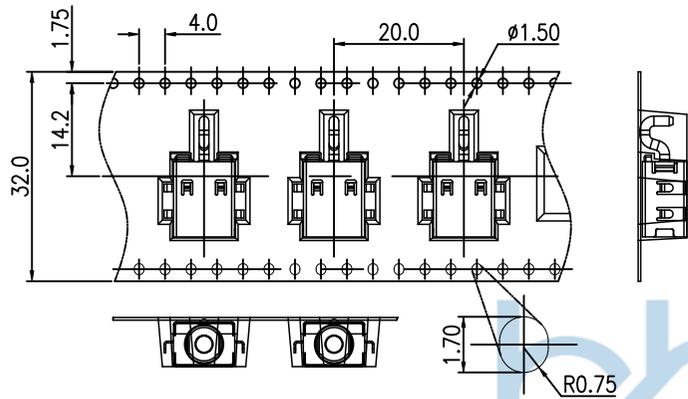

PE袋:

总共10层

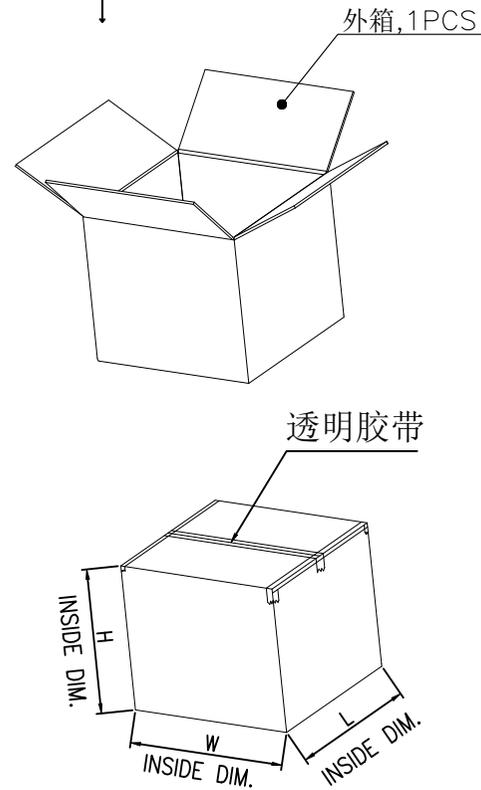

备注:

- 材料规格:
  - 载带: T=0.50mm
  - 包装盘: 蓝色
  - 纸箱: L=335, W=335, H=380
- 包装数量: 400PCS/卷, 10卷(4000PCS)/箱
- 上盖带拔离力: 0.1N~0.7N(10~70gf); 拔离角度: 165°~180°; 拔离速度: 300mm/分钟.



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE PRIOR WRITTEN PERMISSION.	深圳市步步精科技有限公司 .X: ±0.38    .X': ±3' .XX: ±0.25    .X'': ±2' .XXX: ±0.13    .XX': ±1'		NAME: DC座 DC-2.5针 CH=0.20 全铜 沉板3.63 四脚插 带弯钩 电流15A 编带	
	APPD	JM_Zheng	PJ NO: 116-309-040001-P1G SIZE:A4    DRW NO:	
CHKD	Tang	FINISH:SEE NOTES    MAT'L:SEE NOTES		
PDWG NO:0386-2	DR	LYX	SCALE:N/A	REV:A0    UNIT:mm    PAGE:2/2