
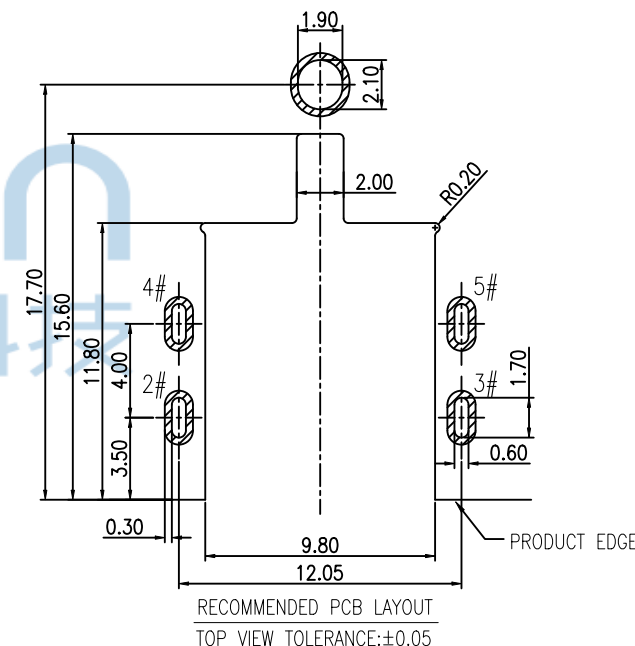

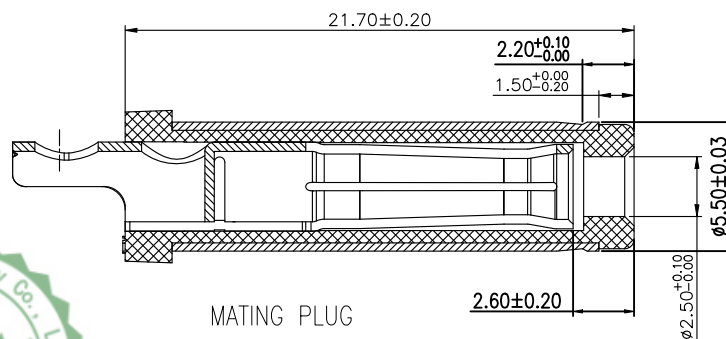
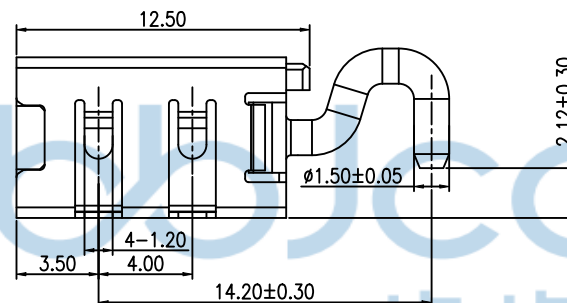
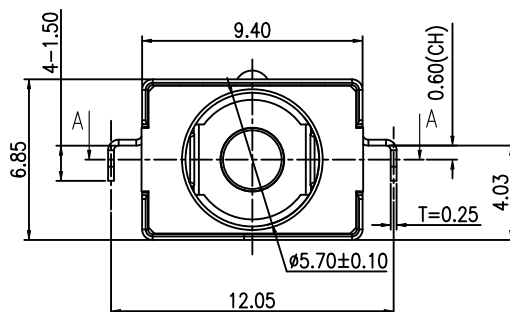

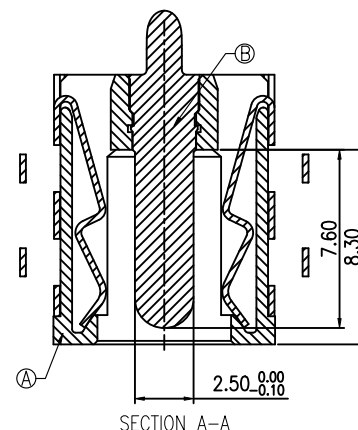


REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	ZY

SPECIFICATION:

1. RATING: DC 30V 15A
2. CONTACT RESISTANCE:
30mΩ MAX(INITIAL).
50mΩ MAX(FINAL).
3. INSULATION RESISTANCE: 100 MΩ MIN.
4. WITHSTAND VOLTAGE: 500 VAC
5. INSERTION FORCE: 30N MAX.
6. EXTRACTION FORCE: 3N MIN.
7. DURABILITY: 5,000 CYCLES







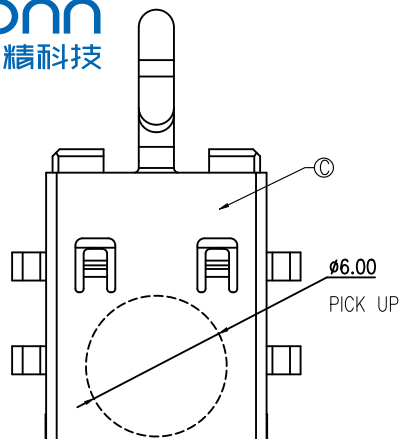


C	SHELL	C5210	Ni 40u" MIN.	1
B	CENTER PIN	BRASS	GOLD FLASH /Ni 40u" MIN.	1
A	HOUSING	PA10T	BLACK	1
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY



THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG.NO: 0386-1

深圳市步步精科技有限公司		NAME: DC座 DC-550250 2.5针 90度 CH=0.60 全铜 沉板4.03 四脚插 带弯钩 电流15A 编带	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	X*: ±3" .X*: ±2" .XX*: ±1"	APPD. JM_Zheng	PJ. NO.: 116-309-040002-P1G
CHKD. LYX	DR. ZY	SIZE: A4	DRW NO.:
		FINISH: SEE NOTES	MAT'L.: SEE NOTES
		SCALE: N/A	REV.: A0 UNIT: mm PAGE: 1/2

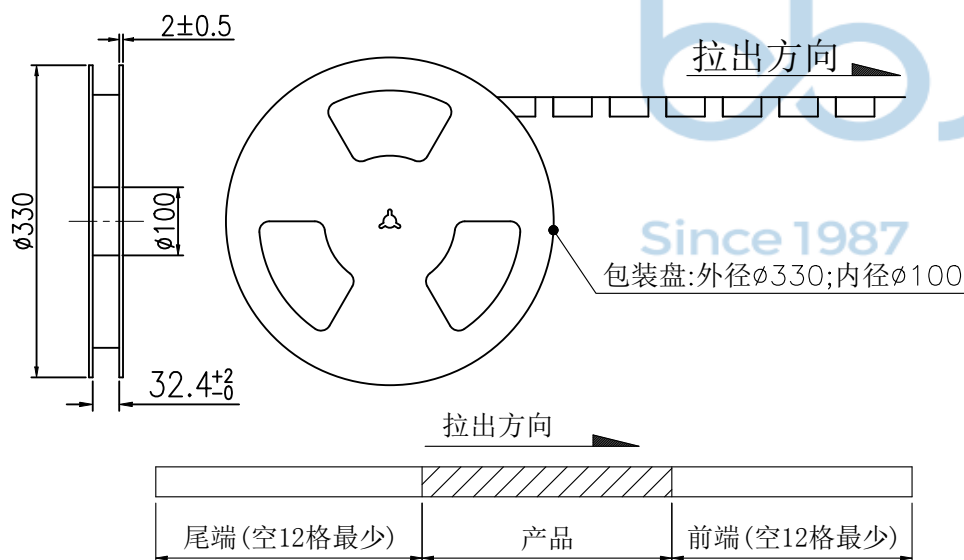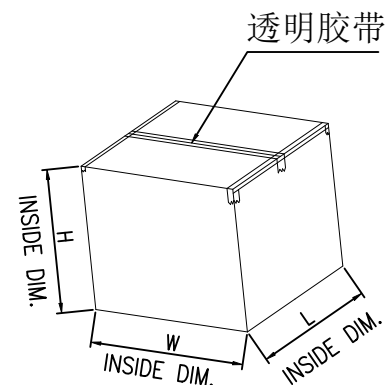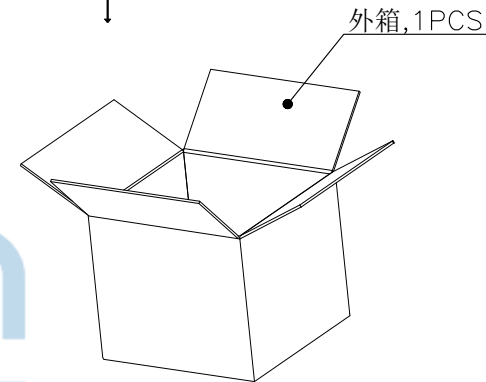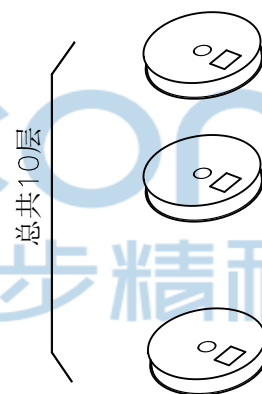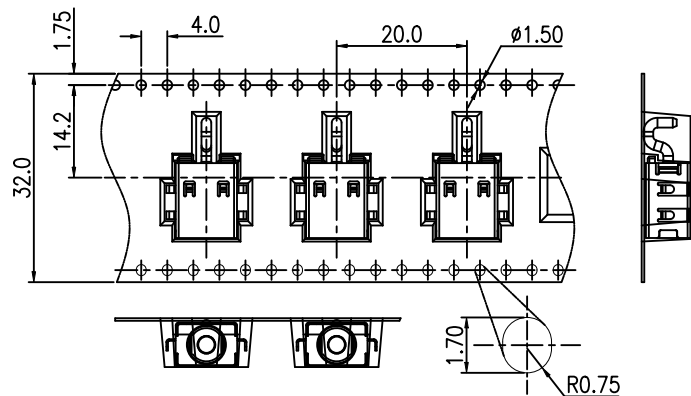

备注:

- 材料规格:
 - 1.1 载带: T=0.50mm
 - 1.2 包装盘: 蓝色
 - 1.3 纸箱: L=335, W=335, H=380
- 包装数量:
 - 400PCS/卷, 10卷(4000PCS)/箱
- 上盖带剥离力: 0.1N~0.7N(10~70gf);
剥离角度: 165°~180°;
剥离速度: 300mm/分钟。



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
PDWG.NO: 0386-1		NAME: DC座 DC-550250 2.5针 90度 CH=0.60 全铜 沉板4.03 四脚插 带弯钩 电流15A 编带	
APPD. JM_Zheng		PJ. NO.: 116-309-040002-P1G	
CHKD. LYX		SIZE: A4 DRW NO.:	
DR. ZY		FINISH: SEE NOTES MAT'L.: SEE NOTES	
		SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2	