
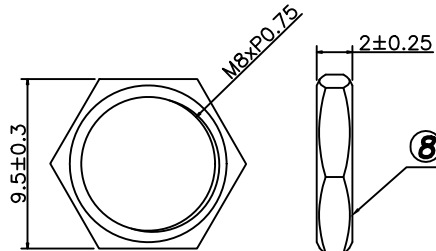


REV.	ECN NO	CONTENT	DATE	ENGINEER
A0			2023 20/04	


SPECIFICATION

1. Rated Load : 30V 3A;
2. Contact resistance: $\leq 30m\Omega$;
3. Insulation resistance: $\geq 100M\Omega$;
4. Withstand voltage: AC500V ;
5. Insertion and extraction force: 3-30N;
6. life test: 5,000 cycles.

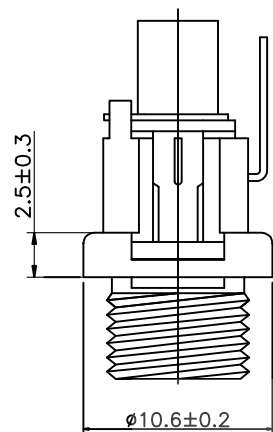


Nut




Washer

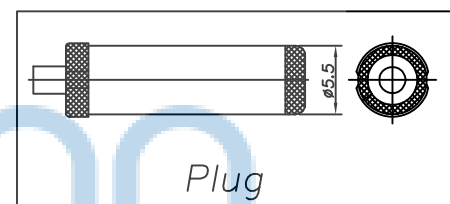


Plug



□: TERMINAL NO.

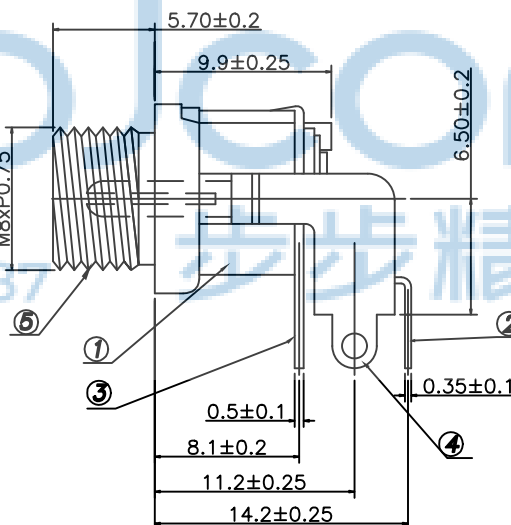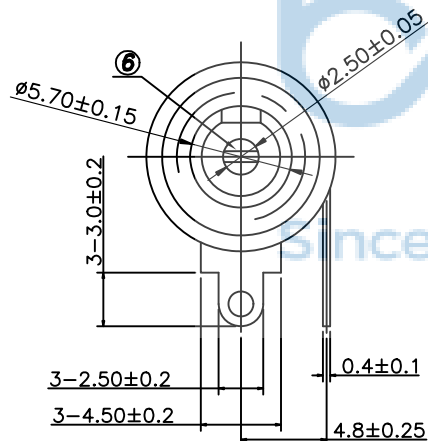

P.C.B Layout



NO.	DESCRIPTION	QTY	MATERIAL	PLATING
⑧	Nut	1	H59	Ni-Plating
⑦	Washer	1	SPCC	Ni-Plating
⑥	Pin	1	H59	Ni-Plating
⑤	Bushing	1	H59	Ni-Plating
④	Shunt Terminal	1	Phosphor bronze	Cu-Sn-Plating
③	Tip Spring	1	Phosphor bronze	Cu-Sn-Plating
②	Center pin terminal	1	BRASS	Cu-Sn-Plating
①	Housing	1	PBT	Black

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.

PDWG. NO:

深圳市步步精科技有限公司

NAME: DC插座 DC-027 2.5针 全铜 三脚插
带螺纹螺母 垫片厚度1.2

APPD. JM_Zheng 23/05'02 P.J. NO.: 116-309-010002-Y2G


CHKD. LYX 23/05'02 SIZE: A4 DRW NO.:

DR. LHC 23/05'02 FINISH: SEE NOTES MAT'L.: SEE NOTES


SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0			2023 20/04	

PE袋规格: 260*185

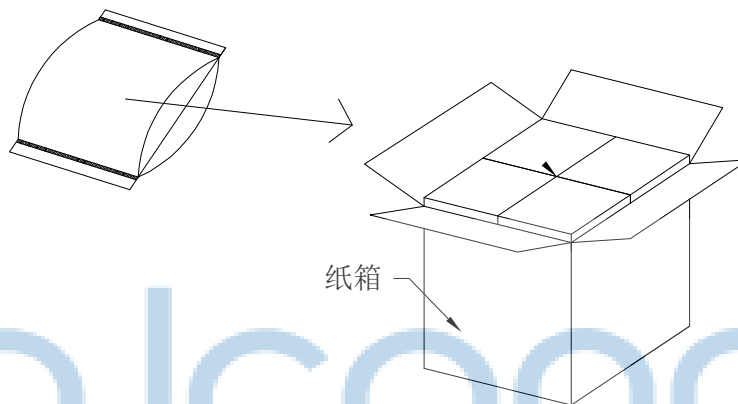

成品标签



1. 包装要求:

- 1.1 每个PE袋包装 500 pcs ;
- 1.2 每1袋放一小纸盒;
- 1.3 每20个小纸盒放一个纸箱, 共计10000 pcs ;
- 1.4 纸箱外贴上标签

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.			深圳市步步精科技有限公司		NAME: DC插座 DC-027 2.5针 全铜 三脚插 带螺纹螺母 垫片厚度1.2	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13			X': ±3" .X': ±2" .XX': ±1"		P.J. NO.: 116-309-010002-Y2G	
APPD.			JM_Zheng 23/05'02		SIZE: A4 DRW NO.:	
CHKD.			LYX 23/05'02		FINISH: SEE NOTES MAT'L.: SEE NOTES	
PDWG.NO: 0050-2			DR. LHC 23/05'02		SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2	