


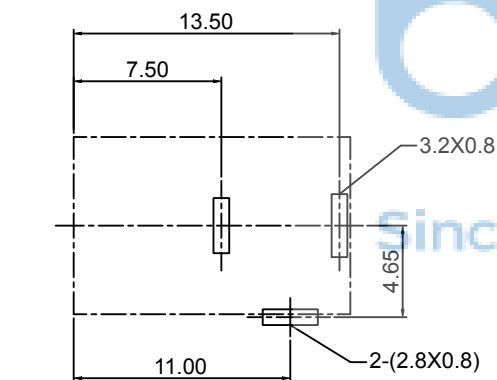


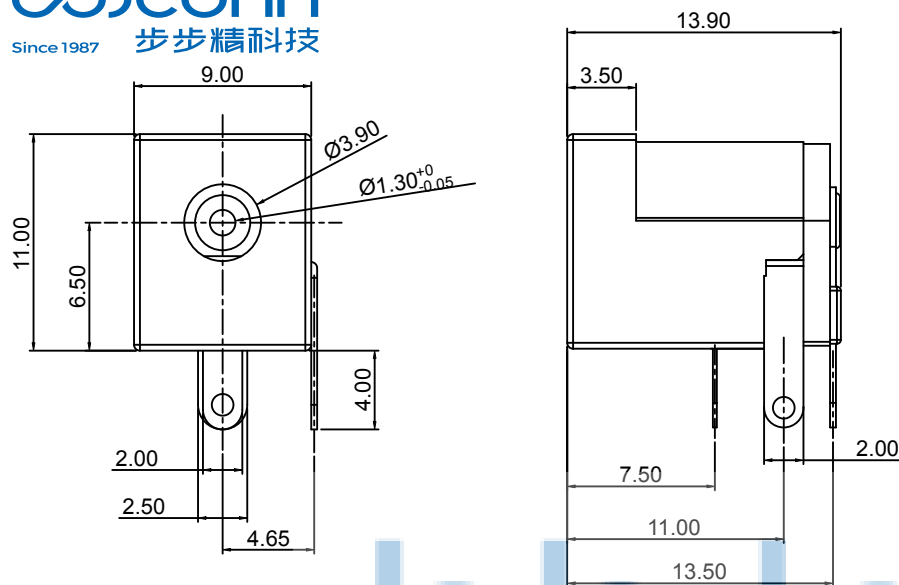

P. C. B 设计参考尺寸

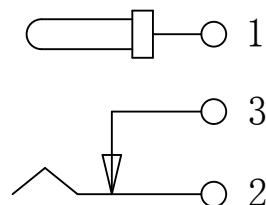

电路示意图

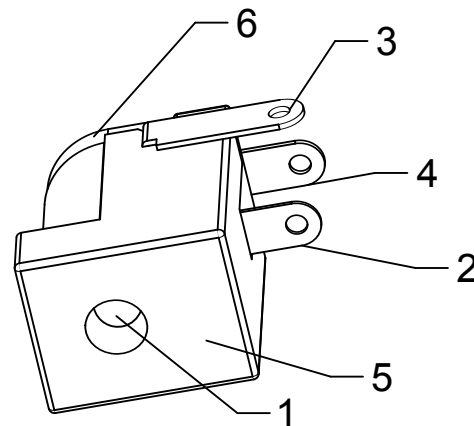

规格:


1. 额定值: DC30V 0.5A
2. 接触电阻: $\leq 30m\Omega$
3. 绝缘电阻: $\geq 100M\Omega$
4. 耐电压: 500VAC
5. 插拔力: 3N~30N
6. 使用寿命: 5000次
7. 使用温度: $-20^{\circ}C \sim +80^{\circ}C$




6	后盖	PBT	1	黑色
5	主体	PBT	1	黑色
4	平片	黄铜 T=0.3mm	1	镀铜锡
3	弯片	黄铜 T=0.3mm	1	镀铜锡
2	弹片	锰钢 T=0.2mm	1	镀镍锡
1	PIN针	黄铜	1	镀铜锡
序号	名称	材料	数量	颜色/电镀

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		PDWG.NO: 0050-2		APPD. JM_Zheng		CHKD. LYX		DR. TSP		NAME: DC插座 DC-005C 1.3针 半铜 PBT黑色		PJ. NO.: DC.02.41-11-2001		SIZE: A4 DRW NO.:		FINISH: SEE NOTES		MAT'L.: SEE NOTES		SCALE: N/A		REV.: A0		UNIT: mm		PAGE: 1/2	
---	--	-----------------	--	----------------	--	-----------	--	---------	--	----------------------------------	--	---------------------------	--	-------------------	--	-------------------	--	-------------------	--	------------	--	----------	--	----------	--	-----------	--

PE袋规格: 260*185

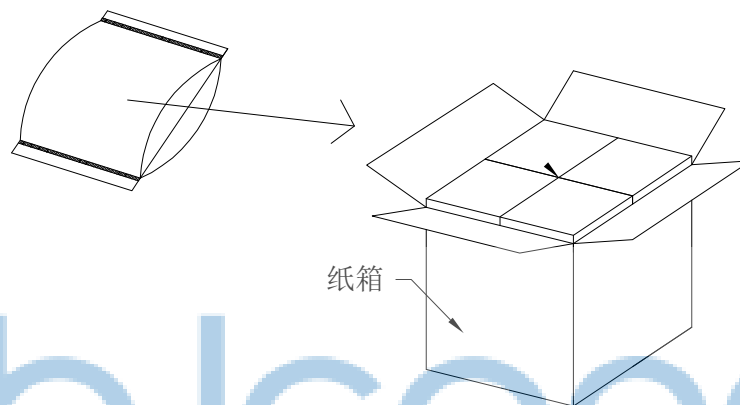

成品标签



1. 包装要求:

- 1.1 每个PE袋包装500pcs;
- 1.2 每1袋放一小纸盒;
- 1.3 每20个小纸盒放一个纸箱, 共计10000pcs;
- 1.4 纸箱外贴上标签



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		NAME: DC插座 DC-005C 1.3针 半铜 PBT黑色	
APPD. JM_Zheng		PJ. NO.: DC.02.41-11-2001	
CHKD. LYX		SIZE: A4 DRW NO.:	
PDWG.NO: 0050-2		FINISH: SEE NOTES MAT'L.: SEE NOTES	
DR. TSP		SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2	