
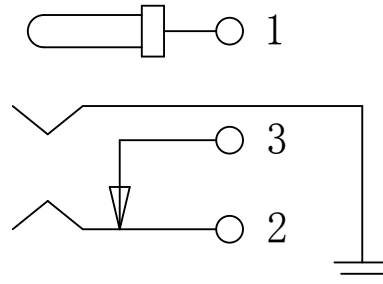

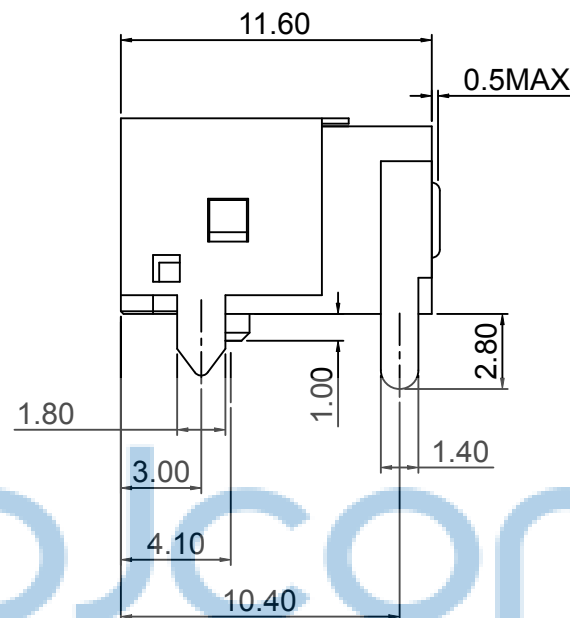


1. 额定值：DC30V 2A
2. 接触电阻： $\leq 30\text{m}\Omega$
3. 绝缘电阻： $\geq 100\text{M}\Omega$
4. 耐电压：500VAC
5. 插拔力：3N $\sim$ 30N
6. 使用寿命：5000次
7. 使用温度： $-20^{\circ}\text{C}\sim+80^{\circ}\text{C}$

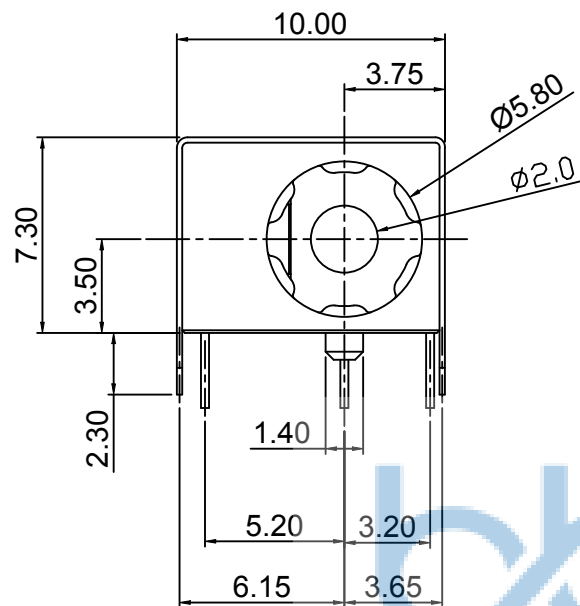

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.

PDWG,NO: 0050-2

7	面板	不锈钢 T=0.1mm	1	本色
6	上盖	磷铜 T=0.2mm	1	CuSn打底1 μm, Sn表面0.15 μm
5	主体	PA9T	1	黑色
4	平片	黄铜 T=0.3mm	1	CuSn打底1 μm, Sn表面0.15 μm
3	弯片	黄铜 T=0.4mm	1	
2	弹片	磷铜 T=0.3mm	1	
1	PIN针	黄铜	1	
序号	名称	材料	数量	颜色/电镀



深圳市步步精科技有限公司

.X: ± 0.38	X*: $\pm 3^*$
.XX: ± 0.25	.X*: $\pm 2^*$
.XXX: ± 0.13	.XX*: $\pm 1^*$

NAME:
DC插座 DC-044A 2.0针 全铜 全包 五脚插 短柱

APPD.	JM_Zheng
-------	----------

	PJ. NO.: DC.02.62-14-2002
---	---------------------------

N.	CHKD.	LYX
----	-------	-----

SIZE: A4 | DRW NO.:

DR.	
-----	--


	TSP
--	-----

FINISH: SEE NOTES	MAT'L.: SEE NOTES
-------------------	-------------------


SCALE: N/A	REV.: A0	UNIT: mm	PAGE: 1/2
------------	----------	----------	-----------

P.C.B 设计参考尺寸

PE袋规格: 260*185

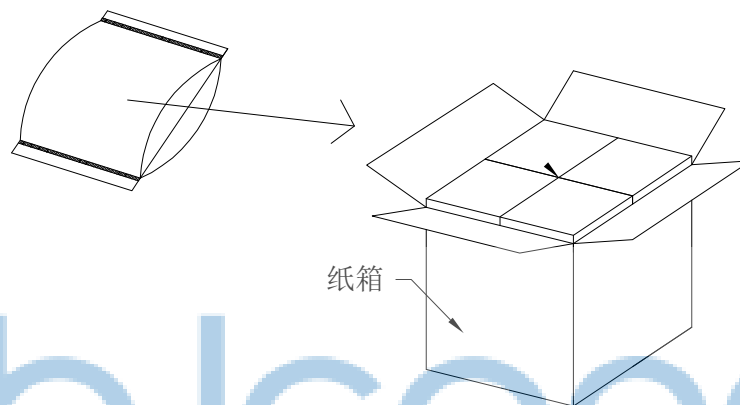

成品标签



1. 包装要求:

- 1.1 每个PE袋包装500pcs;
- 1.2 每1袋放一小纸盒;
- 1.3 每20个小纸盒放一个纸箱, 共计10000pcs;
- 1.4 纸箱外贴上标签



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		NAME: DC插座 DC-044A 2.0针 全铜 全包 五脚插 短柱	
X*: ±3" .X*: ±2" .XX*: ±1"		PJ. NO.: DC.02.62-14-2002	
APPD.	JM_Zheng	SIZE: A4 DRW NO.:	
CHKD.	LYX	FINISH: SEE NOTES MAT'L.: SEE NOTES	
PDWG.NO:	0050-2	SCALE: N/A	REV.: A0 UNIT: mm PAGE: 2/2
DR.		TSP	