
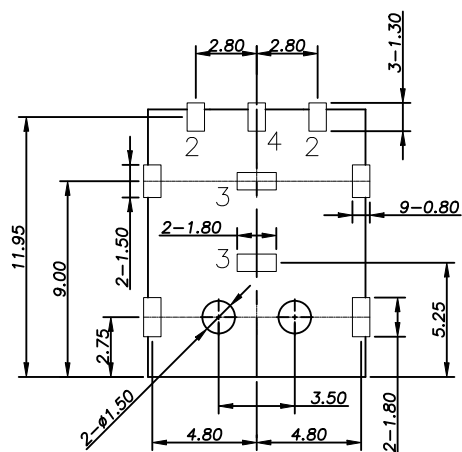

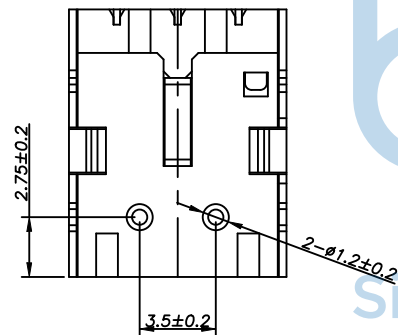
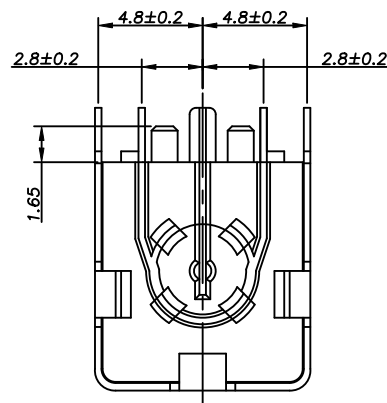
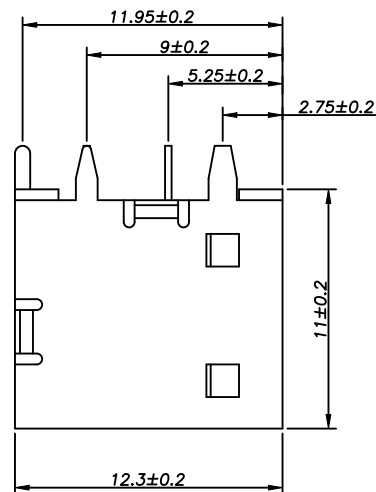


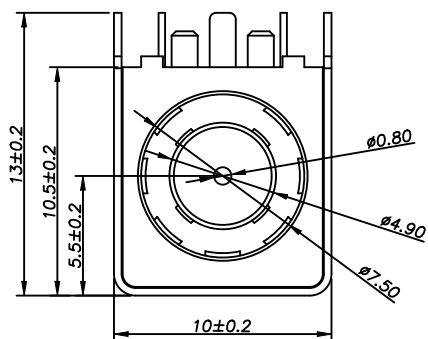

P.C.B LAYOUT TOP VIEW

SCHEMATIC

DC-093	DC-093A
 2	 2
 4	
 3	 3

REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0		Initial release	/	TSP

ELECTRICAL

VOLTAGE RATING: 25V DC (R. M. S)

CURRENT RATING:10 A

CONTACT RESISTANCE:30mΩ MAX.

INSULATION RESISTANCE: 100 MΩ MIN.

DIELECTRIC WITHSTAND VOLTAGE: 500V AC (R. A. M)

TEMPERATURE RANGE: -25°C TO +85°C



⑥	COVER	1	HIGH TEMP THERMOPLASTIC UL-94V-0		BLACK
⑤	HOUSING	1	HIGH TEMP THERMOPLASTIC UL-94V-0		BLACK
④	SHELL	1	C2680 t=0.35	Ni-PLATED	
③	4# TERMINAL	1	C2680 t=0.30	Ag-PLATED	
②	3 TERMINAL	1	C2680 t=0.30	Ag-PLATED	
①	2# TERMINAL	1	C2680 t=0.30	Ag-PLATED	
NO.	PART NAME	Q'TY	MATERIAL	FINISH	REMARK

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE



深圳市步步精科技有限公司

.X: ± 0.38	X*: $\pm 3^\circ$
.XX: ± 0.25	.X*: $\pm 2^\circ$
.XXX: ± 0.13	.XX*: $\pm 1^\circ$

NAME:	DC插座 DC-093 0.8针 全铜 九脚插 带柱 防火
-------	-------------------------------

APPD.	JM_Zheng
-------	----------


	PJ. NO.: DC.02.K2-14-2001
---	---------------------------

CHKD.	LYX
-------	-----

	SIZE: A4	DRW NO.:
	FINISH: SEE NOTES	MAT'L: SEE NOTES

DR.	TSE
-----	-----

FINISH: SEE NOTES		MAT'L.: SEE NOTES	
SCALE: N/A	REV: A0	UNIT: mm	PAGE: 1 /

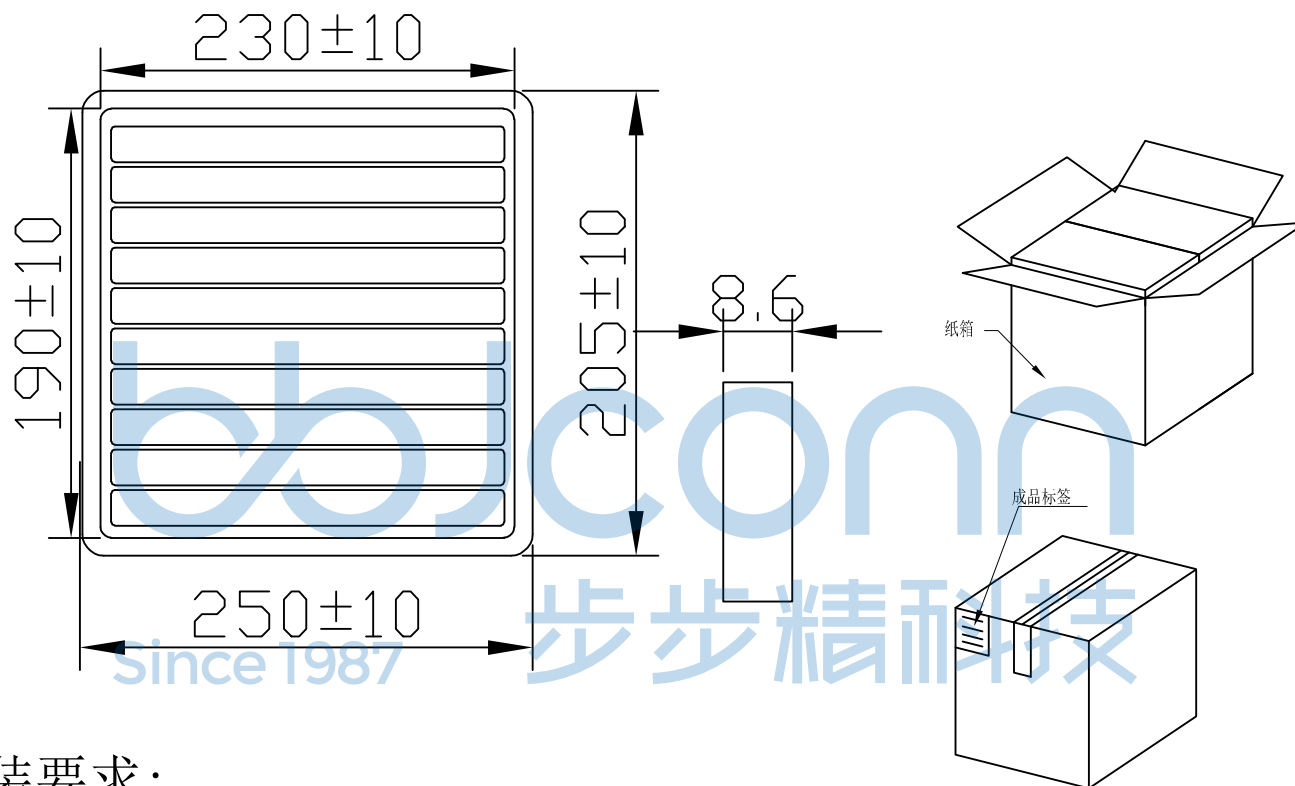

纸箱规格: 350*210*290

1. 包装要求:
- 1.1 每盒吸塑盒包装100pcs;
- 1.2 每20盘放一箱, 共计2000PCS;
- 1.3 纸箱外贴上标签。

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
PDWG.NO: 0050-2		NAME: DC插座 DC-093 0.8针 全铜 九脚插 带柱 防火	
APPD.	JM_Zheng	PJ. NO.: DC.02.K2-14-2001	
CHKD.	LYX	SIZE: A4 DRW NO.:	
DR.	TSP	FINISH: SEE NOTES	MAT'L.: SEE NOTES
		SCALE: N/A	REV.: A0 UNIT: mm PAGE: 2/2