

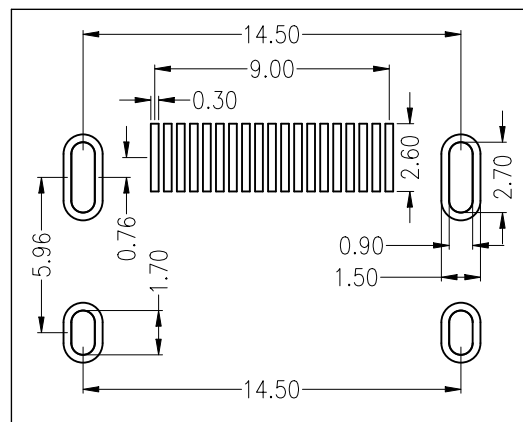
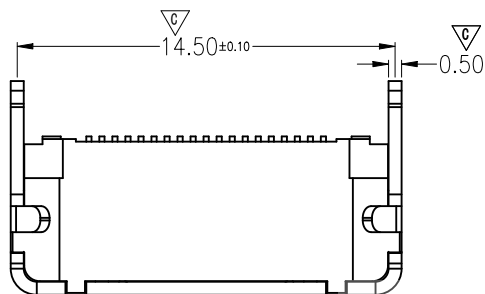
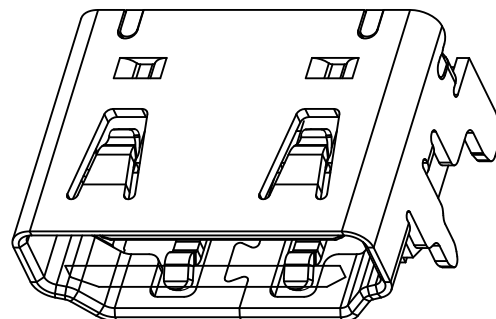
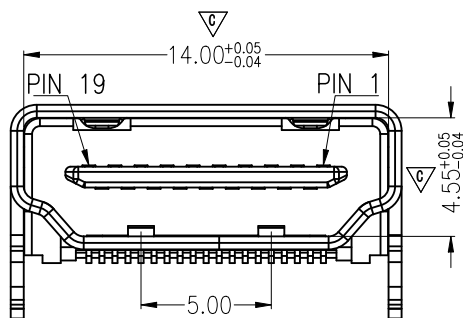


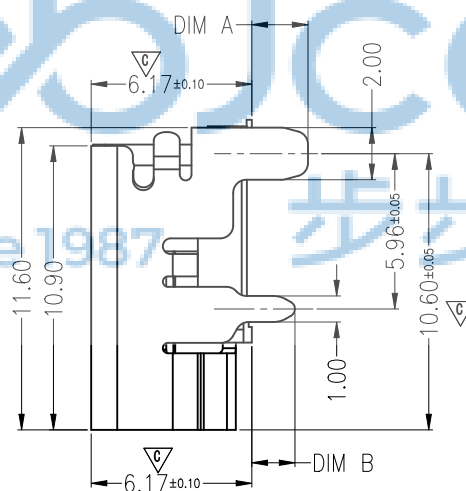

RECOMMENDED P.C.B HOLE LAYOUT
COMPONENT SIDE VIEW(TOLERANCE: +/-0.05)

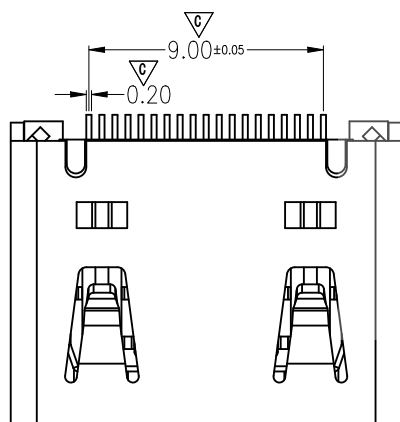

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0				

说明:

1. 材质:

胶芯: LCP, UL94V-0; COLOR: BLACK

端子: C2680

外壳: SPCC/C2680

2. 电镀说明:

端子: 接触区域镀金

焊锡区域镀锡100 u"Min

全部区域镍底50 u" Min

外壳: 表面镀镍100 u" Min

3. 电气性能:

绝缘阻抗 (EIA-364-21) : 100 MΩ MIN.

AT 500V/DC FOR 1 MINUTE.

接触阻抗 (EIA-364-06) 30 mΩ MAX.

耐电压 (EIA-364-20) NO DISCHARGE,

FLASHOVER OR BREAKDOWN

AT 500 V/AC 1MINUTE.




THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. PDWG,NO: 0100-2		深圳市步步精科技有限公司 .X: ±0.38 .X': ±3" .XX: ±0.25 .X': ±2" .XXX: ±0.13 .X': ±1"		NAME: HDMI 19P A型 母座 L=11.60 板上四脚插 平口 铁壳镀镍 无凸点 端子SMT (协会版) APPD. JM_Zheng CHKD. LYX DR. TSP		PJ. NO.: HA01-N1L1-11-1 SIZE: A4 DRW NO.: FINISH: SEE NOTES MAT'L.: SEE NOTES SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/3	
---	--	---	--	---	--	---	--


4. P/N:

外壳脚规格:

规格	DIM A	DIM B	外壳脚凸点
1	2.16	1.66	无凸点
2	2.16	1.66	带凸点
3	1.50	1.50	无凸点
4	2.20	2.20	无凸点
5	1.50	1.50	带凸点

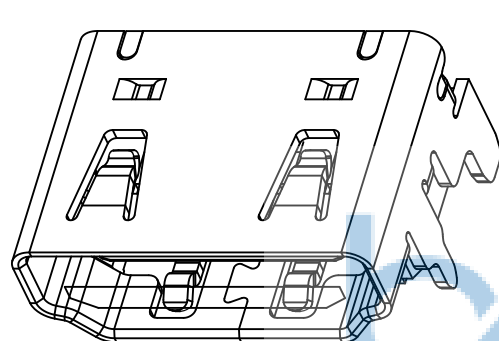

脚无凸点


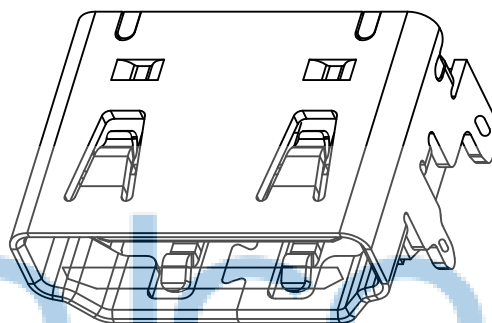


脚有凸点




PIN	Signal Assignment	PIN	Signal Assignment
1	TMDS Data2+	2	TMDS Data2 Shield
3	TMDS Data2-	4	TMDS Data1+
5	TMDS Data1 Shield	6	TMDS Data1-
7	TMDS Data0+	8	TMDS Data0 Shield
9	TMDS Data0-	10	TMDS Clock+
11	TMDS Clock Shield	12	TMDS Clock-
13	CEC	14	Utility
15	SCL	16	SDA
17	DDC/CEC Ground	18	+5V Power
19	Hot Plug Detect		

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. PDWG.NO: 0100-2		 深圳市步步精科技有限公司		NAME: HDMI 19P A型 母座 L=11.60 板上四脚插 平口 铁壳镀镍 无凸点 端子SMT (协会版)	
	.X: ± 0.38 .XX: ± 0.25 .XXX: ± 0.13		X*: $\pm 3'$.X*: $\pm 2'$.XX*: $\pm 1'$	PJ. NO.: HA01-N1L1-11-1	
APPD.	JM_Zheng			SIZE: A4 DRW NO.:	
CHKD.	LYX	FINISH: SEE NOTES		MAT'L.: SEE NOTES	
DR.	TSP	SCALE: N/A		REV.: A0	UNIT: mm PAGE: 2/3

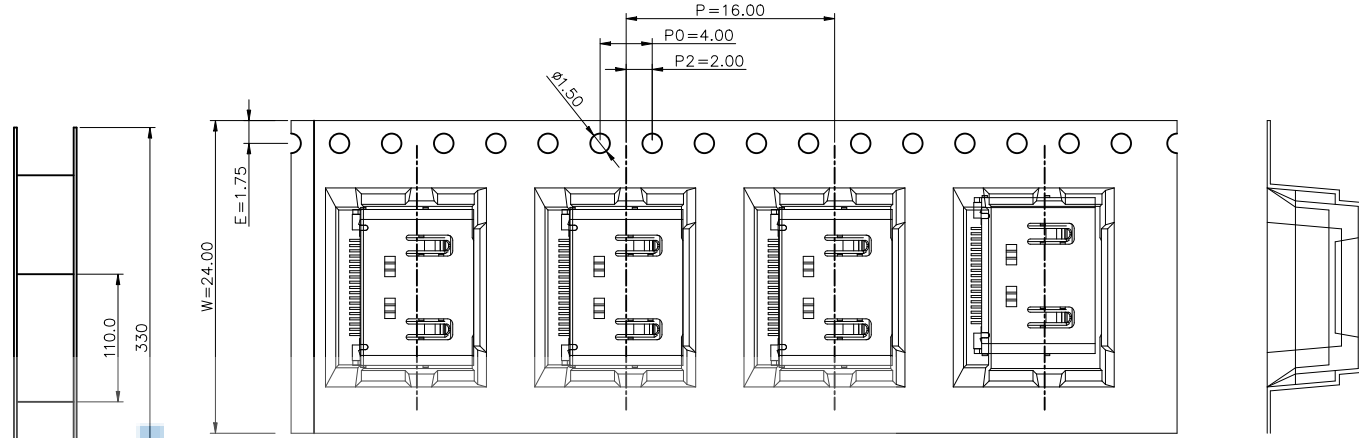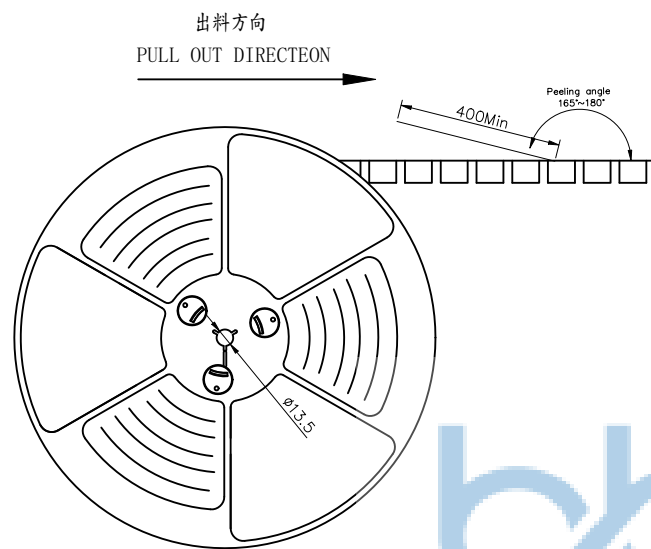

NOTES

1. 帶子引導長度
LEAD TAPE LENGTH
出料方向
PULL OUT DIRECTEON

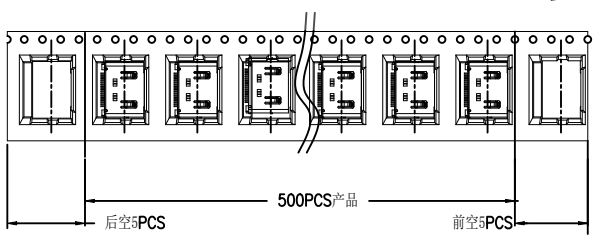

2. 出貨運輸過程中一定注意：
THIS REQUIREMENT SHOULD BE APPLIED AT SHIPMENT：
卷帶在運輸過程中不能散開
PEELING OFF SHOULD NOT BE ALLOWED DURING TRANSPORTATION

TAPE & REEL 10 PCS
1 REEL
= 500 PCS

BOX
DIMENSIONS:
340X340X290

1 CARTON
=10 REELS
=5000 PCS



包裝明細表 (The detail of the packing)						
產品料號 (Product No.)	包裝容量 (Packing Capacity)			重量 Weight (Kg)		
	pcs/box	boxs/Carton	Pcs/Box	N. W. /Pcs	N. W. /Box	G. W. /Box
HA01-N1L1-11-1	500	10	5000	----	----	----

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X*: ±3" .X*: ±2" .XX*: ±1"		NAME: HDMI 19P A型 母座 L=11.60 板上四脚插 平口 铁壳镀镍 无凸点 端子SMT (协会版)	
APPD.	JM_Zheng	PJ. NO.: HA01-N1L1-11-1		SIZE: A4 DRW NO.:		FINISH: SEE NOTES MAT'L.: SEE NOTES	
CHKD.	LYX	DR.		TSP		SCALE: N/A REV.: A0 UNIT: mm PAGE: 3/3	
PDWG.NO: 0100-2							

深圳市步步精科技有限公司