

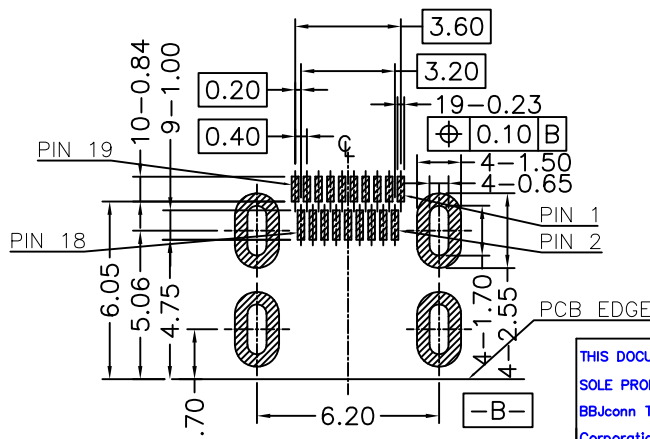
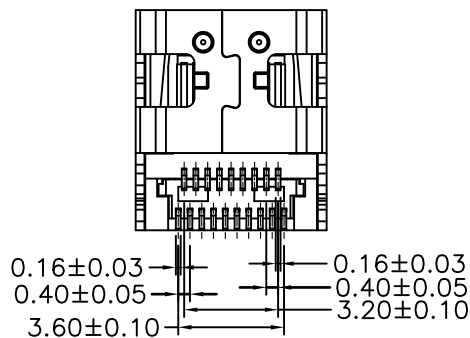
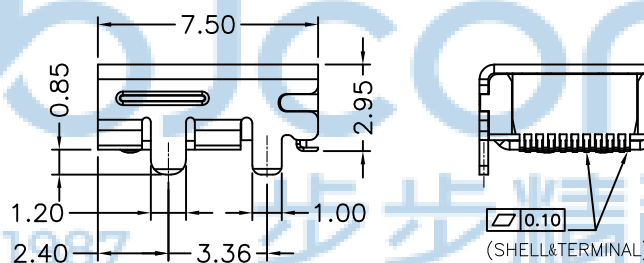
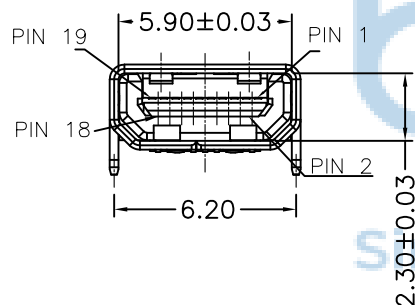




RECOMMENDED PCB LAYOUT(.XX±0.05)
CONNECTOR SIDE(TOP VIEW)

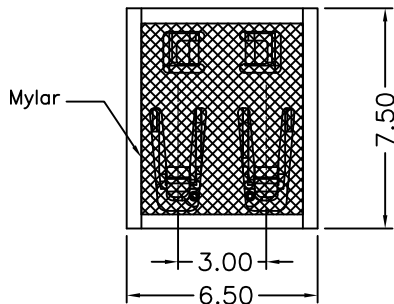

REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0		Initial release	/	GZY

NOTE:

1.MATERIAL:

- 1.1 HOUSING: LCP, BLACK, UL94V-0
- 1.2 TERMINAL: COPPER ALLOY T=0.12mm
- 1.3 SHELL: COPPER ALLOY T=0.30mm

2.PLATING:

- 2.1 CONTACT: SEE P/N
50u" Min. NICKEL UNDER-PLATED
- 2.2 SHELL:50u" Min. NICKEL PLATED OVERALL

3.MECHANICAL CHARACTERISTICS

- INSERTION FORCE: 44.1N MAX
- EXTROCTION FORCE: 5N MIN(AFTER 5000 CYCLES 3N MIN.), 25N MAX.

MATING CYCLE:5000 CYCLES

4.ELECTRICAL CHARACTERISTICS

- RATING CURRENT: 0.5A
- RATING VOLTAGE: 40V
- CONTACT RESISTANCE: 10 MILLOHMS OHMS MAX (EXCLDING CONDUCTOR RESISTANCE)
- INSULATION RESISTANCE:
 - a, UNMATED: 100M OHMS MIN AT 500 VDC
 - b, MATED: 10M OHMS MIN AT 150 VDC
- DIELECTRIC WITHSTANDING VOLTAGE: 250V AC/1MINUTE
- OPERATING TEMPERATURE: -20°C--+85°C
- STORAGE TEMPERATURE: -20°C--+65°C

PIN	Signal Assignment	PIN	Signal Assignment
1	Hot Plug Detect	2	Utility
3	TMDS Data2+	4	TMDS Data2 Shield
5	TMDS Data2-	6	TMDS Data1+
7	TMDS Data1 Shield	8	TMDS Data1-
9	TMDS Data0+	10	TMDS Data0 Shield
11	TMDS Data0-	12	TMDS Clock+
13	TMDS Clock Shield	14	TMDS Clock-
15	CEC	16	DDC/CEC Ground
17	SCL	18	SDA
19	+5V Power		

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.

PDWG.NO: 0407-1



深圳市步步精科技有限公司

.X: ±0.38 X': ±3'
.XX: ±0.25 .X': ±2'
.XXX: ±0.13 .XX': ±1'

NAME: HDMI 19P D母 L=7.50 板上四脚插
平口 带凸点 端子SMT 铜壳 LCP黑胶 编带

APPD. JM_Zheng

PJ. NO.: 124-221-190002-W3G

CHKD. LYX


SIZE: A4 DRW NO.:

DR. GZY


FINISH: SEE NOTES MAT'L.: SEE NOTES
SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2

Notes:

- 1.此部品, 禁止使用含有《环境管理物质控制标准》所限制的物质作为材料;
- 2.卷带中每位置放置一个产品,每卷卷带的前后端预留约28个孔位不使用;
- 3.边放产品边用封胶带封口,1个卷盘放置1000个产品;1包干燥剂
- 4.然后再卷一圈保护带,保护带最后重叠约50MM,用皱纹胶纸将其封住;
- 5.每个卷盘上贴“视源条源标签”及“环保标签”后入内箱;
- 6.内箱外侧以胶带封口,每个内箱外侧图示位置贴“内箱标签”;
- 7.每2个卷盘一个内箱,6个内箱入1个外箱,每箱装12000PCS.
- 8.外箱外侧图示位置贴“外箱标签”.

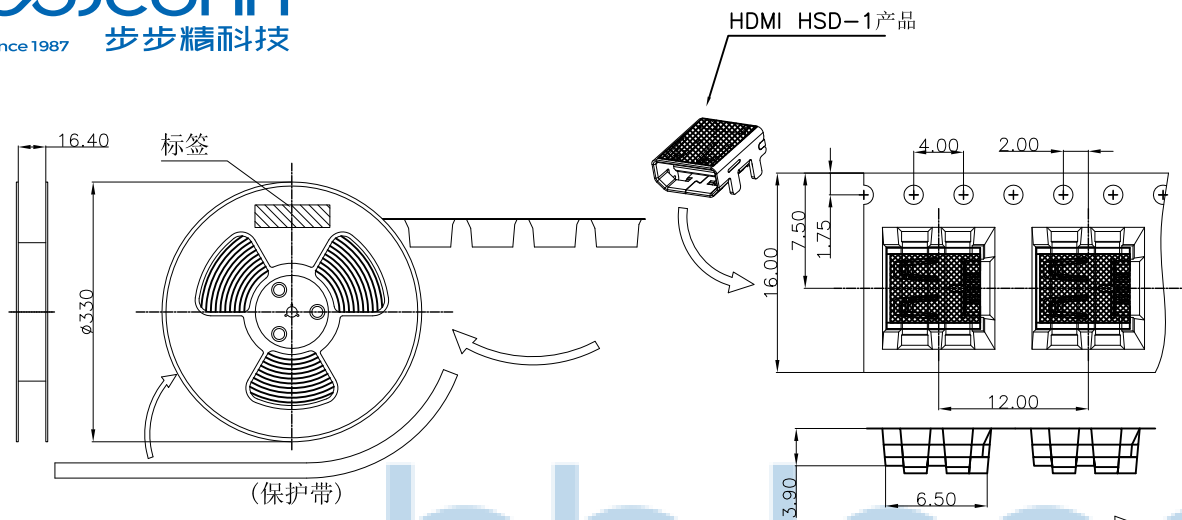

卷带时收料方向: 焊脚朝右, 卷带定位圆孔朝上。

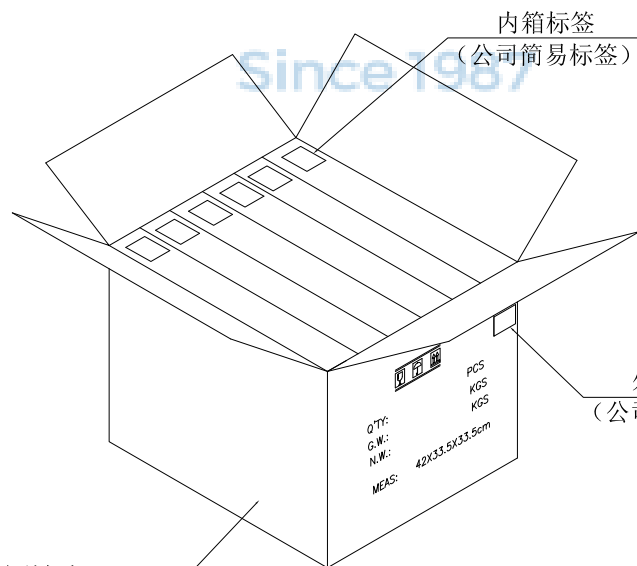

外箱 (材质K=K)


L X W X H
L420*W355*H355mm

内箱标签
(公司简易标签)

外箱标签
(公司简易标签)

内箱 (材质A=B)

L X W X H
L340*W65*H335mm

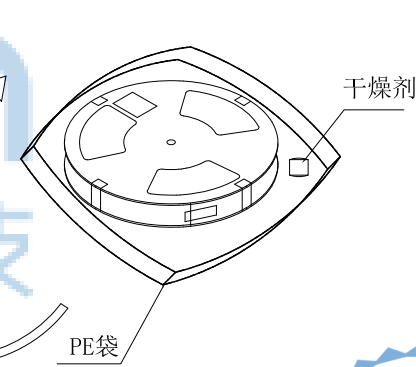

干燥剂

PE袋



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司		NAME: HDMI 19P D母 L=7.50 板上四脚插 平口 带凸点 端子SMT 铜壳 LCP黑胶 编带	
APPD. JM_Zheng		.X: ±0.38 .X': ±3' .XX: ±0.25 .X': ±2' .XXX: ±0.13 .X': ±1'		PJ. NO.: 124-221-190002-W3G	
CHKD. LYX		FINISH: SEE NOTES		MAT'L.: SEE NOTES	
PDWG.NO: 0407-1		DR. GZY		SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2	