
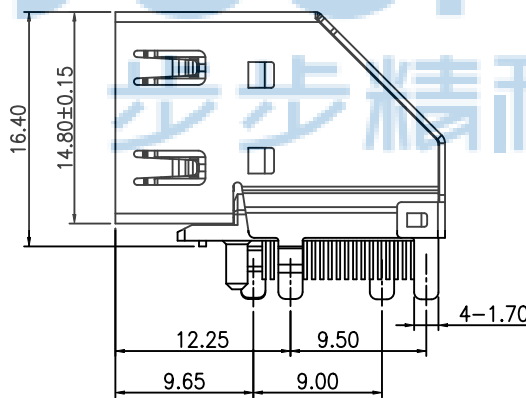
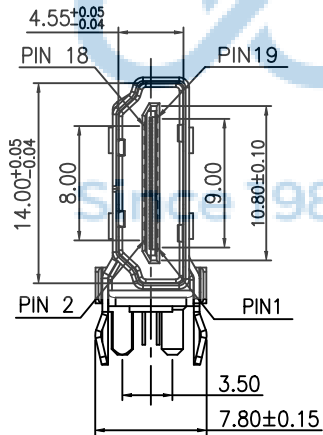
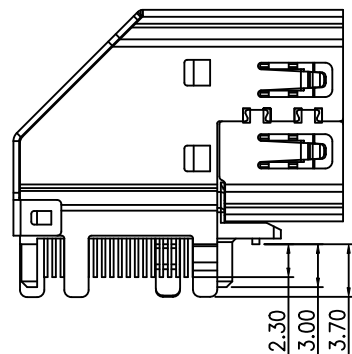
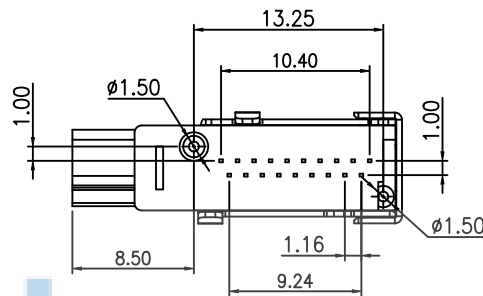


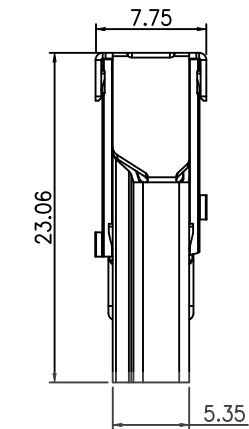

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	

NOTE:

1.MATERIAL:

1.1 TERMINAL: BRASS ,T=0.2±0.02MM

1.2 SHELL: BRASS ,T=0.4±0.02MM

1.3 HOUSING: LCP+30%.G.F.(UL94-0),BLACK

2.PLATING:

2.1 CONTACT: CONTACT AREA GOLD FLASH PLATED

SOLDER AREA TIN(100u"MIN.) PLATED

UNDER PLATED NICKEL(50u"MIN.)

2.2 SHELL: NICKEL(80u"MIN.) PLATED

3.SPECIFICATIONS:

3.1 CURRENT RATING: 0.5A MIN.


3.2 CONTACT RESISTANCE: CONTACT RESISTANCE EXCLUDING CONDUCTOR

RESISTANCE: 10mΩ MAX.

3.3 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(RMS)

3.4 INSULATION RESISTANCE: 100MΩ MIN. AT 500V DC

3.5 OPERATING TEMPERATURE: -25°C~+85°C

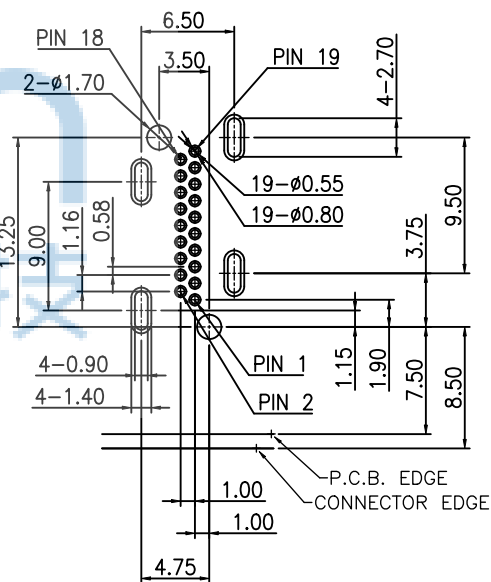

RECOMMENDED PCB LAYOUT (TOP VIEW)

TOLERANCE: ±0.05mm



THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.

PDWG.NO: 0215-2



深圳市步步精科技有限公司

.X: ±0.38
.XX: ±0.25
.XXX: ±0.13

X*: ±3'
.X*: ±2'
.XX*: ±1'

NAME: HDMI 19P A母 90度 侧插 四脚插 弯脚7.8
端子DIP 针长2.3 LCP黑胶 平口 铜壳 L=23.06 无LOGO 盒装

APPD. JM_Zheng

CHKD. LYX




DR. ZY

PJ. NO.: 124-222-190001-T2G

SIZE: A4 DRW NO.:

FINISH: SEE NOTES MAT'L.: SEE NOTES

SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2

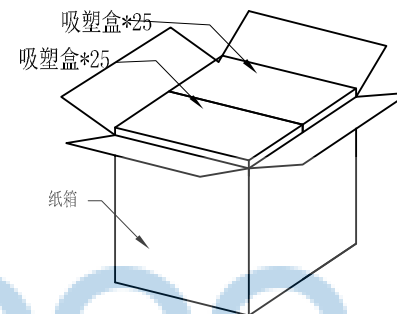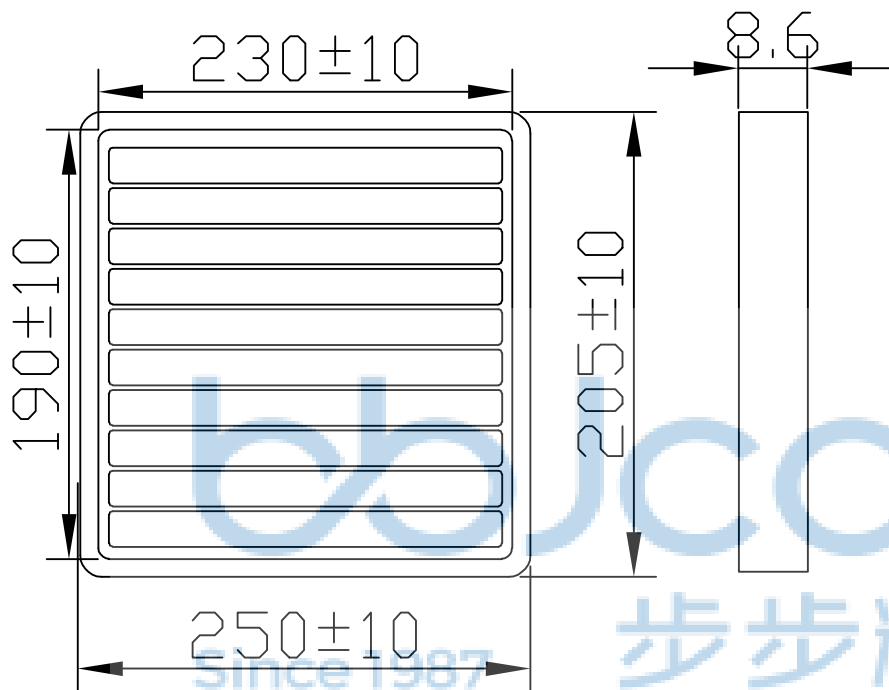

纸箱规格: 350*210*290

1. 包装要求:
- 1.1 每盒吸塑盒包装 50 pcs;
 - 1.2 纸箱外贴上标签



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X*: ±3* .X*: ±2* .XX*: ±1*	
NAME: HDMI 19P A母 90度 侧插 四脚插 弯脚7.8 端子DIP 针长2.3 LCP黑胶 平口 铜壳 L=23.06 无LOGO 盒装		PJ. NO.: 124-222-190001-T2G	
APPD. JM_Zheng		SIZE: A4 DRW NO.:	
CHKD. LYX		FINISH: SEE NOTES MAT'L.: SEE NOTES	
PDWG.NO: 0215-2		DR. ZY	
SCALE: N/A		REV.: A0 UNIT: mm PAGE: 2/2	