



PIN FUNCTION

- ① Vcc
② GND
③ Vout



机械特性

1. 使用温度: $-20^{\circ}\text{C} \sim +70^{\circ}\text{C}$
2. 相对湿度: 85%
3. 插入力: $\leq 39.2\text{N}$
4. 拔出力: $\geq 3.9\text{N}$
5. 插拔寿命: 500次

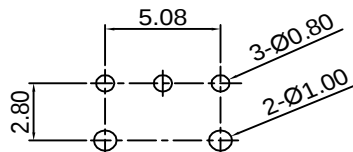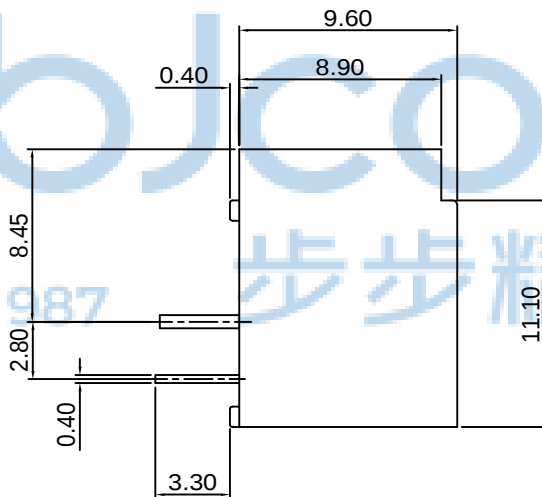




P.C.B 设计参考尺寸

5	固定针	黄铜	2	镀铜锡
4	芯片	接收信号晶源	1	引脚镀银
3	弹片	SUS301	1	本色
2	门板	PA66	1	黑色
1	主体	PA66	1	黑色
序号	名称	材料	数量	颜色/电镀

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG.NO: 0050-2

深圳市步步精科技有限公司

.X: ± 0.38 .XX: ± 0.25 .XXX: ± 0.13	X': $\pm 3^{\circ}$.X': $\pm 2^{\circ}$.XX': $\pm 1^{\circ}$	NAME: 光纤接收座 R015W 五脚插 盒装
APPD. JM_Zheng	CHKD. LYX	PJ. NO.: 118-2A2-050001-Y2G
DR. TSP		SIZE: A4 DRW NO.:
		FINISH: SEE NOTES
		MAT'L.: SEE NOTES
		SCALE: N/A
		REV.: A0
		UNIT: mm
		PAGE: 1/2

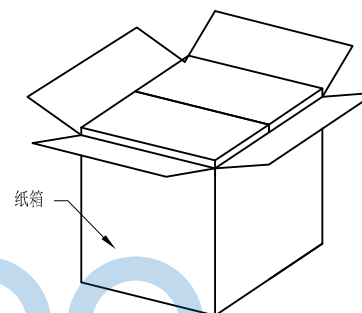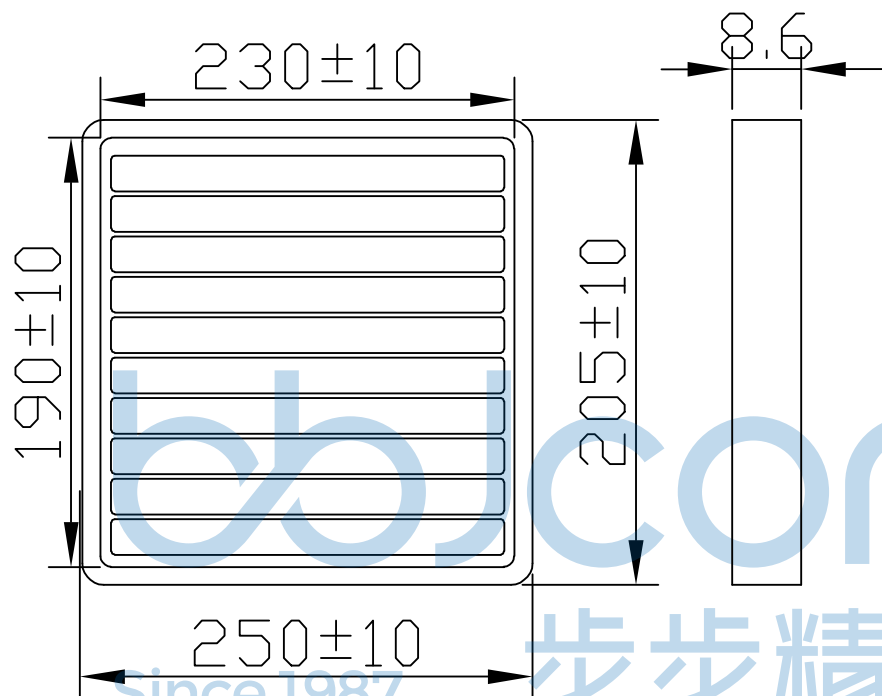

纸箱规格: 350*210*290



1. 包装要求:
- 1.1 每盒吸塑盒包装100pcs;
- 1.2 每20盘放一箱, 共计2000PCS;
- 1.3 纸箱外贴上标签。

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司		NAME: 光纤接收座 R015W 五脚插 盒装	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X*: ±3" .X*: ±2" .XX*: ±1"		PJ. NO.: 118-2A2-050001-Y2G	
APPD. JM_Zheng		CHKD. LYX		SIZE: A4 DRW NO.:	
PDWG.NO: 0050-2		DR. TSP		FINISH: SEE NOTES MAT'L.: SEE NOTES	
				SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2	