


REV	ECN NO	CONTENT	DATE	ENGINEER
A0		INITIAL RELEASE	/	LYX

- 技术参数:
1. 使用温度: -25~+85℃;
 2. 额定负荷: DC 12V 50mA;
 3. 接触电阻: ≤50mΩ;
 4. 绝缘电阻: ≥100MΩ;
 5. 耐 压: AC250V (50Hz)/min;
 6. 动 作 力: 260±50g;
 7. 使用寿命: 100000次;
 8. 未注尺寸公差参照下面表格。

8.35	9.5	Ø3.0
7.85	9.0	Ø3.0
7.35	8.5	Ø3.0
6.85	8.0	Ø3.2
6.35	7.5	Ø3.2
6.85	7.0	Ø3.2
5.35	6.5	Ø3.2
4.85	6.0	Ø3.3
4.35	5.5	Ø3.3
3.85	5.0	Ø3.4
3.35	4.5	Ø3.5
高度L (mm)	帽头H (mm)	直径A (mm)

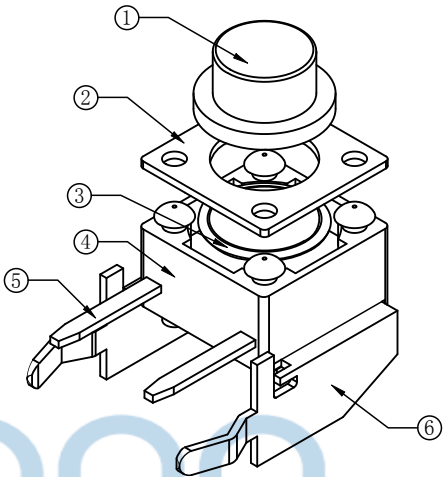

6	机架	1	冷轧钢带	Cu/Sn
5	嵌件	1	H62Y 黄铜	Ag
4	底座	1	PPA	黑
3	簧片	1	不锈钢	Ag
2	盖板	1	冷轧钢带	Cu/Sn
1	按钮	1	PPA	黑
序号	名称	数量	材 料	镀层/颜色

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.





PDWG NO:0933-2

深圳市步步精科技有限公司


.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	X*: ±3* .X*: ±2* .XX*: ±1*
APPD JM_Zheng	CHKD Tang
DR LYX	

NAME:
轻触开关 6x6x6 下支架 CH=4.0 260G




PJ NO: 901-011-033001-G6G	SIZE:A4	DRW NO:
FINISH:SEE NOTES	MAT'L:SEE NOTES	
SCALE:N/A	REV:A0	UNIT:mm
PAGE:1/2		

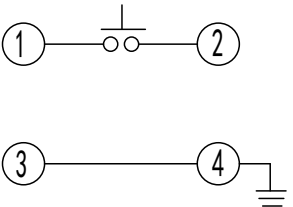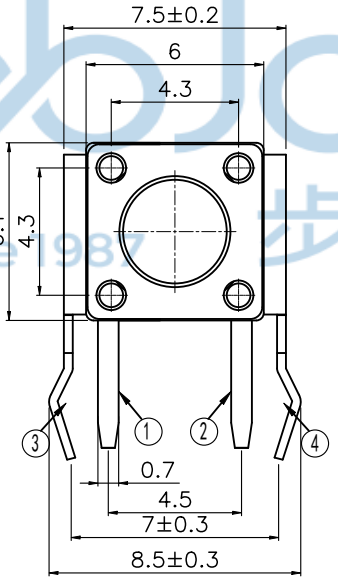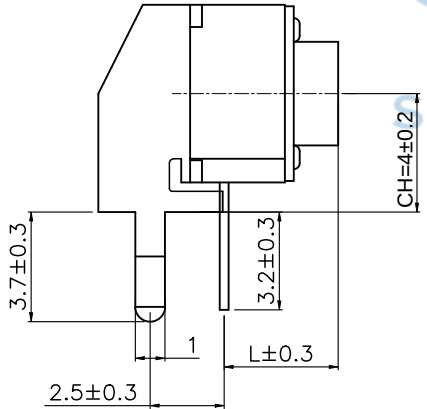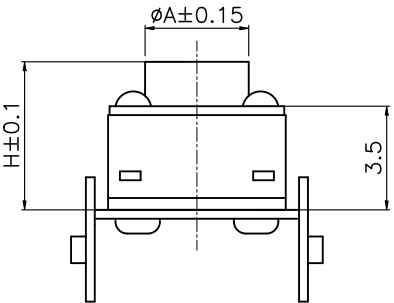

电路图



PCB线路板安装图(±0.1)

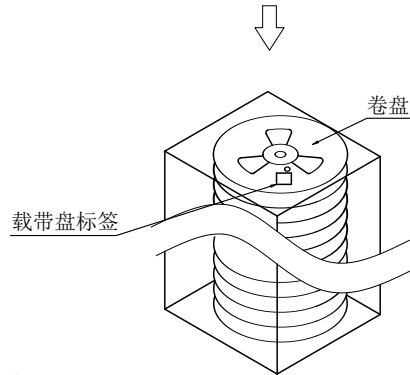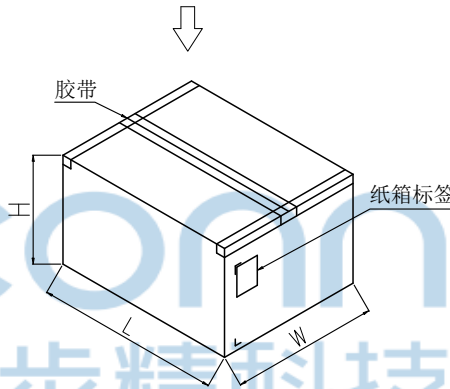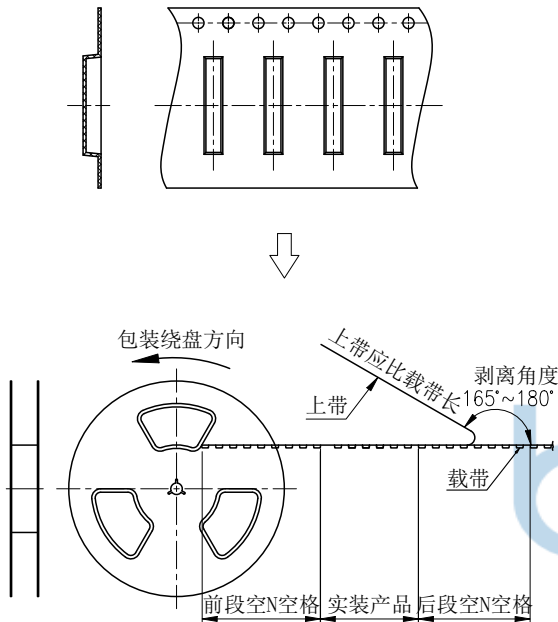

纸箱规格: W345*L345*H350MM



备注:

- 1、包装数量: 500/PCS/卷, 20卷/箱。
- 2、包装袋长度: 每卷前后各空10-20个空格, 中间包装。
- 3、材质:
载体: 聚丙烯 (PS), 阻抗 $10^{6-9} \Omega$
上带: 聚乙烯 (PET), 阻抗 $10^{6-11} \Omega$
卷盘: 聚苯乙烯。



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
PDWG,NO: 0933-2		APPD. JM_Zheng CHKD. Tang DR. LYX	NAME: 轻触开关 6x6x6 下支架 CH=4.0 260G PJ. NO.: 901-011-033001-G6G SIZE: A4 DRW NO.: FINISH: SEE NOTES SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2