




REV	ECN NO	CONTENT	DATE	ENGINEER
A0		INITIAL RELEASE	/	LYX

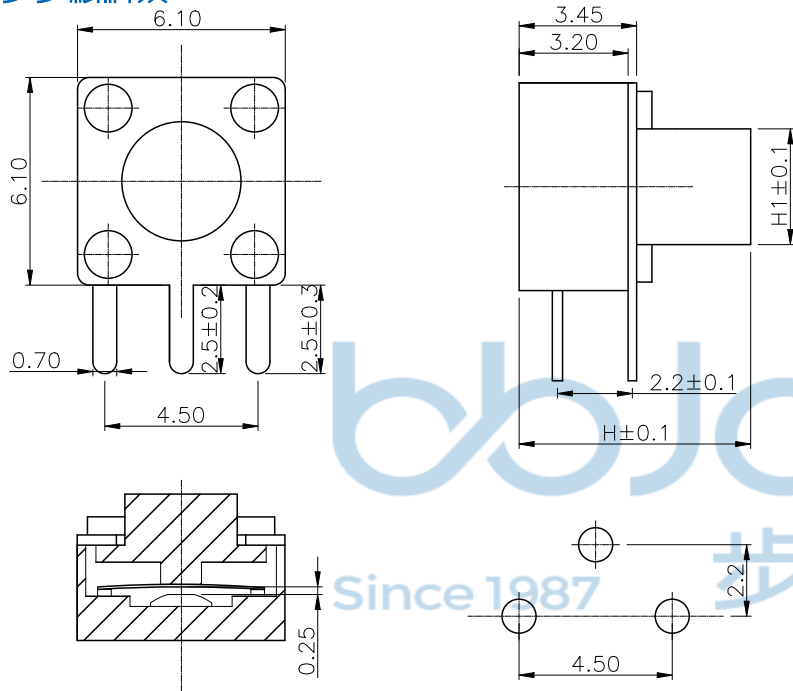

电路图

CIRCUIT DIAGRAM

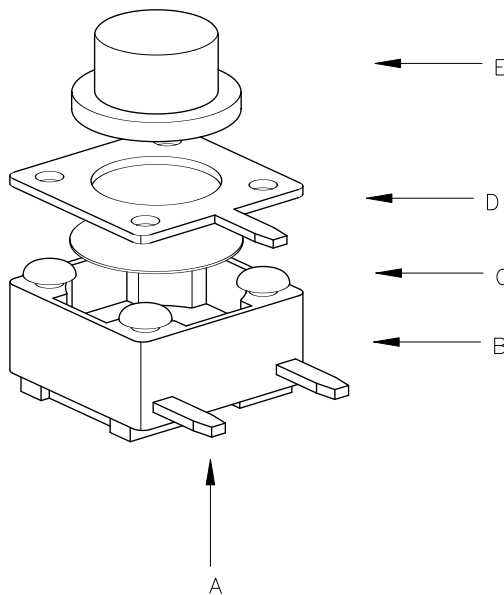

主要技术参数、性能
The Main Thchnology Performance

额定电流、电压: Rate voltage,current	50mA DC12V
接触电阻: Contact resistance	≤50mΩ
按力: Operating force	250±50g
行程: travel	0.25±0.1mm
绝缘电阻: Insulated resistance	≥100MΩ
介电强度: Dielectric strength	≥250VAC/1min
寿命: Endurance	10万次

H1	H
3.5	4.3
3.5	4.5
3.5	5
3.4	5.5
3.4	6
3.4	6.5
3.4	7
3.2	7.5
3.2	8
3.0	8.5
3.0	9
3.0	9.5
3.0	10
3.0	10.5
3.0	11
3.0	12


E	按钮	PPA	1	红色
D	铁盖	铁带	1	铜锡
C	弹片	进口不锈钢	1	镀银
B	本体	PPA	1	黑色
A	卡件	黄铜	1	镀金/0.15μm
项目 ITEM	名称 DESCRIPTION	材质 MATERIAL	数量 QTY	表面处理/颜色 FINISH/COLOR

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.


深圳市步步精科技有限公司

.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	X*: ±3" .X*: ±2" .XX*: ±1"	NAME: 轻触开关 6x6x7.0 边三脚DIP 不锈钢弹片 红柄 260GF 袋装
APPD	JM_Zheng	PJ NO:901-011-093002-J8G
CHKD	Tang	SIZE:A4 DRW NO:
PDWG NO:0933-2	DR	LYX
		FINISH:SEE NOTES
		MAT'L:SEE NOTES
		SCALE:N/A
		REV:A0
		UNIT:mm
		PAGE:1/2

PE袋规格: 260*185

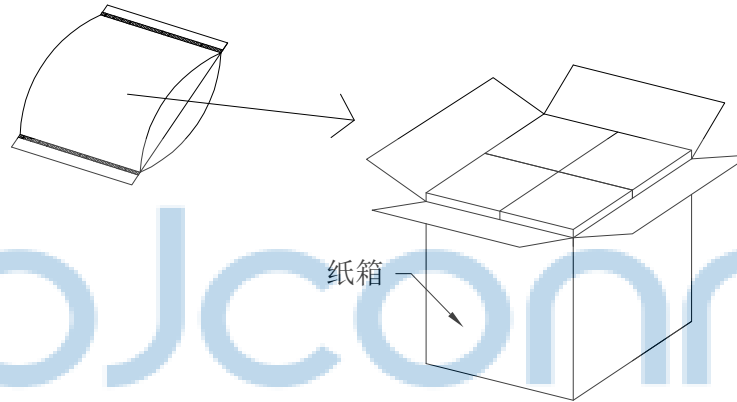

成品标签



1. 包装要求:

- 1.1 每个PE袋包装1000pcs;
- 1.2 每1袋放一小纸盒;
- 1.3 每20个小纸盒放一个纸箱, 共计20000pcs;
- 1.4 纸箱外贴上标签

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
PDWG.NO: 0933-2		NAME: 轻触开关 6x6x7.0 边三脚DIP 不锈钢弹片 红柄 260GF 袋装	
APPD.	JM_Zheng	PJ. NO.: 901-011-093002-J8G	
CHKD.	LYX	SIZE: A4 DRW NO.:	
DR.	SGF	FINISH: SEE NOTES	MAT'L.: SEE NOTES
		SCALE: N/A	REV.: A0 UNIT: mm PAGE: 2/2