
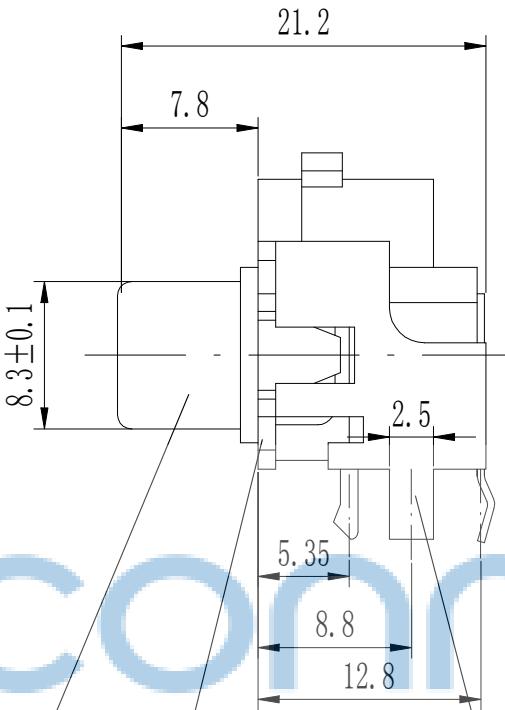




REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0				

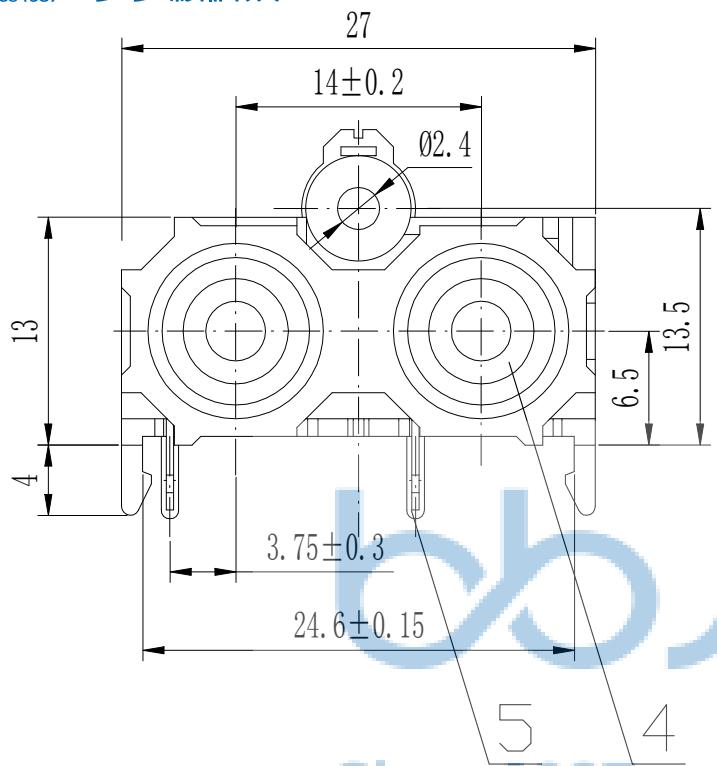

主要技术特性要求:

- 使用条件:
环境温度: -25~70°C
相对湿度: 90% (40°C)
- 额定负荷: DC30V 0.3A
- 接触电阻: $\leq 0.03\Omega$
- 绝缘电阻: $\geq 100\text{MW}$
- 耐压: AC250V (50Hz) 1min
- 插拔力: 5~35N
- 寿命: 1000次

颜色示意图

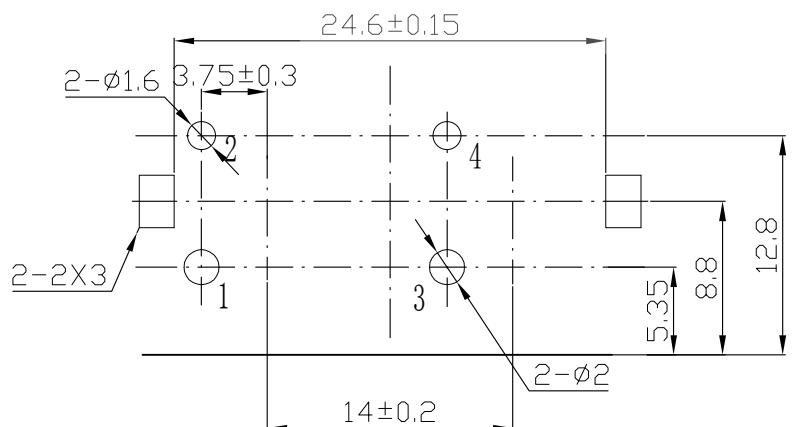

接点示意图





THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. CORPORATION AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.
APPD. JM_Zheng CHKD. LYX PDWG.NO: 0334-1 DR. TSP

5	触片	黄铜 T=0.3mm	2	镀铜锡	
4	色圈	PBT	2	黄/黑	
3	铜套	黄铜 T=0.25mm	2	镀铜锡	
2	塑垫圈	ABS	1	黑色	
1	基座	PBT	1	黑色	
序号	名称	材 料	数 量	镀层/颜色	备 注

NAME: AV插座 AV2-8.4-14D 两孔 左黄右黑色圈 四脚插 不带屏蔽 PBT黑胶耐高温料基座

P.J. NO.: 117-2E2-040002-S26
SIZE: A4 DRW NO.:
FINISH: SEE NOTES MAT'L.: SEE NOTES
SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2

PE袋规格: 260*185

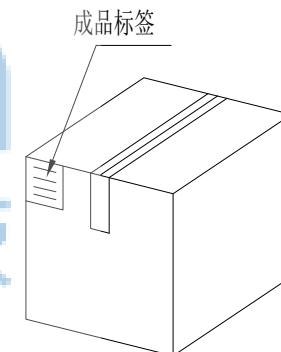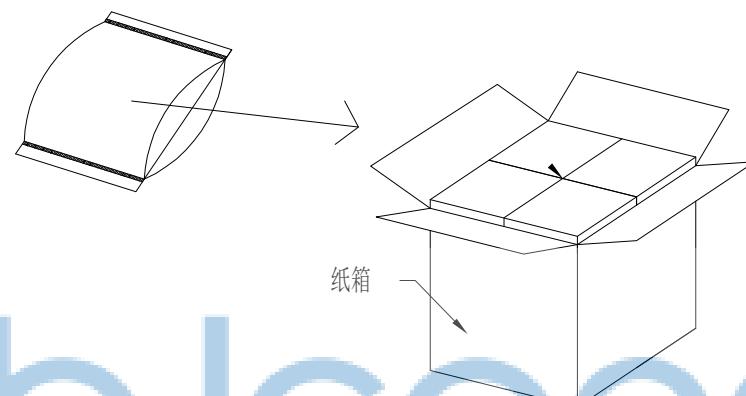

1. 包装要求:

- 1.1 每个PE袋包装200pcs;
- 1.2 每1袋放一小纸盒;
- 1.3 每30个小纸盒放一个纸箱, 共计6000pcs;
- 1.4 纸箱外贴上标签



THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG.NO: 0334-1

APPD. JM_Zheng
CHKD. LYX
DR. TSP



深圳市步步精科技有限公司
NAME: AV插座 AV2-8.4-14D 两孔 左白右红色圈
四脚插 不带屏蔽 PBT黑胶耐高温料基座

.X: ±0.38	X: ±3'	NAME: AV插座 AV2-8.4-14D 两孔 左白右红色圈 四脚插 不带屏蔽 PBT黑胶耐高温料基座
.XX: ±0.25	X': ±2'	P.J. NO.: 117-2E2-040002-S26
.XXX: ±0.13	XX: ±1'	SIZE: A4 DRW NO.:
		FINISH: SEE NOTES MAT'L.: SEE NOTES
		SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2