

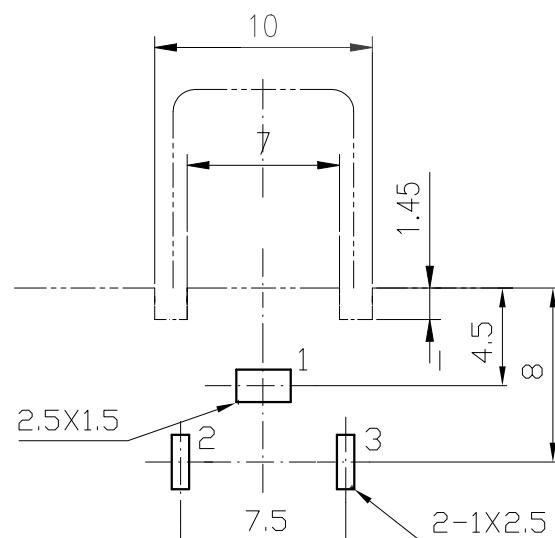
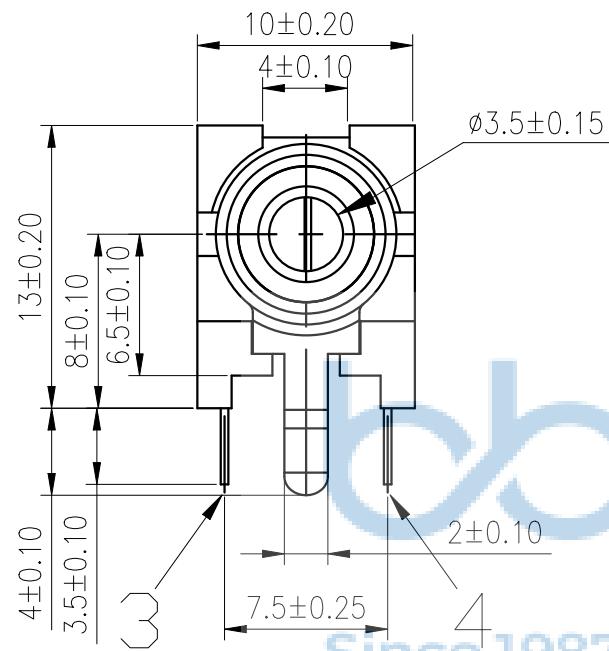


REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0				

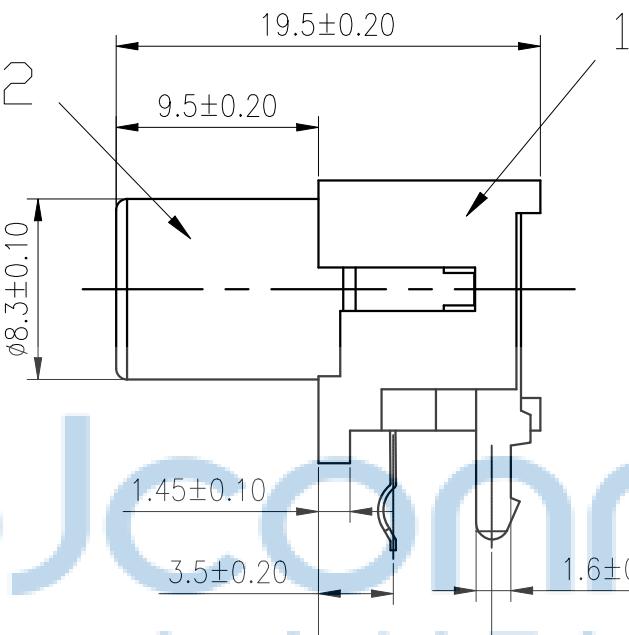

PCB LAYOUT(TOP VIEW)
Tolerance: ±0.05

CIRCUIT DIAGRAM



THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
APPD: JM_Zheng
PDWG.NO: 0334-1



序号	名称	材 料	数 量	镀层/颜色	备 注
4	静片 2	黄铜T=0.3	1	镀铜锡	
3	动片 3	磷铜T=0.3	1	镀铜锡	
2	铜套 1	黄铜T=0.3	1	镀铜锡	
1	基座	PBT	1		

NAME:
AV插座 8.4-05K 单孔 三脚插 不带屏蔽 PBT红色耐高温料基座

.X: ±0.38	X': ±3'	NAME:
.XX: ±0.25	X': ±2'	AV.01.23-11-4001
.XXX: ±0.13	XX': ±1'	SIZE: A4 DRW NO.:
APPD: JM_Zheng	CHKD: LYX	FINISH: SEE NOTES MAT'L.: SEE NOTES
PDWG.NO: 0334-1	DR: TSP	SCALE: N/A REV.: A0 PAGE: 1/2



主要技术特性要求:


- 使用条件: 环境温度: -40~70°
- 额定负载: DC50V 0.2A
- 接触电阻: ≤0.03Ω
- 绝缘电阻: ≥100MΩ DC500V
- 耐压: AC500V (50Hz) /1min
- 插拔力: 3-25N
- 寿命: 5000次

基座 颜 色	绿	
	红	√
	白	
	黄	
	黑	
	橙	
	紫	

深圳市步步精科技有限公司

REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0				

PE袋规格: 260*185

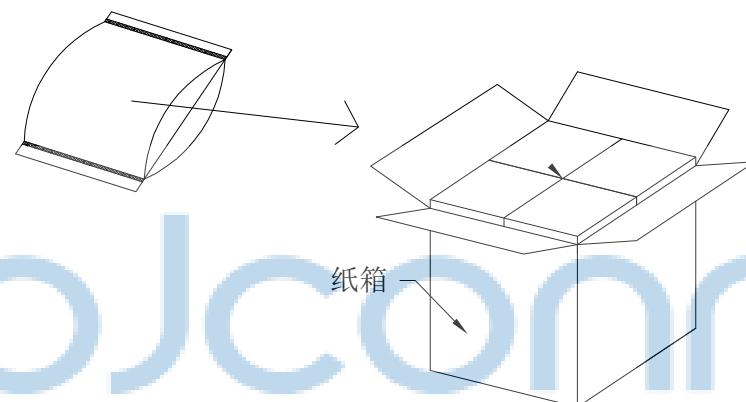


bbJconn 步步精科技

Since 1987

1. 包装要求:

- 1.1 每个PE袋包装400pcs;
- 1.2 每1袋放一小纸盒;
- 1.3 每20个小纸盒放一个纸箱，共计8000pcs;
- 1.4 纸箱外贴上标签

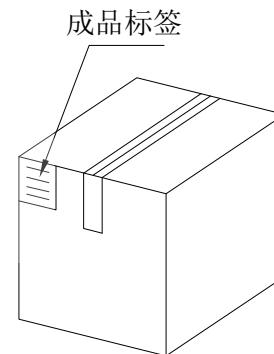

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG.NO: 0334-1

APPD. JM_Zheng
CHKD. LYX
DR. TSP



深圳市步步精科技有限公司

.X: ±0.38	X: ±3'	NAME:
.XX: ±0.25	.X: ±2'	AV插座 8.4-05K 单孔 三脚插 不带屏蔽 PBT红色耐高温料基座
.XXX: ±0.13	.XX: ±1'	
		P.J. NO.: AV.01.23-11-4001
		SIZE: A4 DRW NO.:
		FINISH: SEE NOTES MAT'L.: SEE NOTES
		SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2