

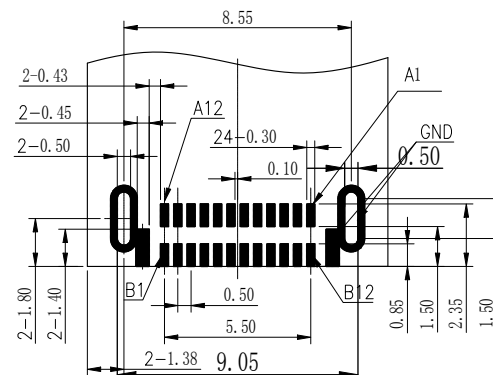
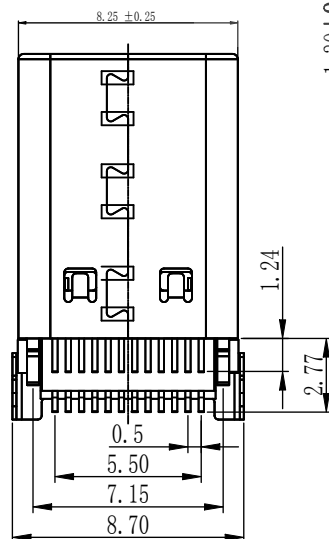


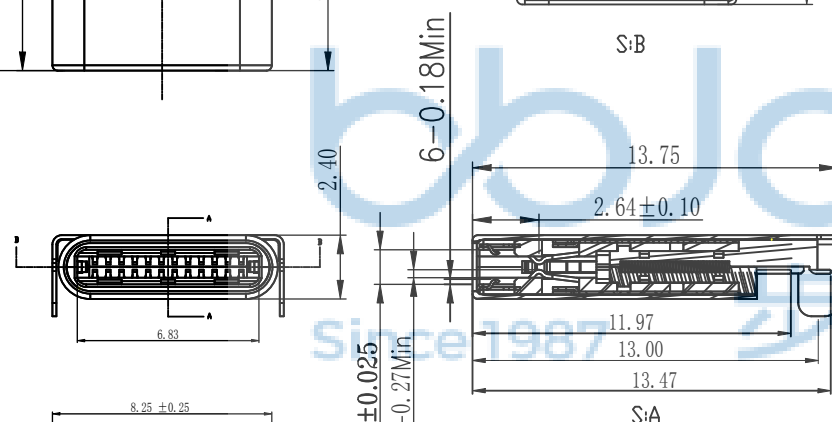

REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0		Initial release	/	SGF

- Material:
Contacts: Copper alloy T=0.15
Insulator: HIGH TEMPERATURE PLASTIC UL 94V-0,
Shell: STEEL T=0.15
MID Plate: Stainless Steel
EMI Plate: Stainless Steel
- Electrical:
Current-max[amps]: 5A Max For Vbus/GND PIN;
0.9A Max For Other PIN.
Withstanding Voltage: 100V AC R.M.S
Contact Resistance [ohms]: 40mΩ Max.For
Initial 10mΩ.Change Afier
Test.Measure AT 20mV, 100mA
Insulation Resistance [ohms]: 100 mΩ min.
- MECHANICAL CHARACTERISTICS:
Mating force: 5~20N
Unmated Force: 6~20N After test.
Durability: 10000 cycles min.
- Plating:
Contacts: SEE TABLE Au plated on contact area,
Fog SN plating 80~100u"Min on solder area
Nickel Under plating 20u"Min over all
Gnd pin: Plating 30u"min Nickel under overall
on solder SN 80u"Min
Shell : plating 50~100u"Nickel over
- Environmental
Temperature Range: -55° C~+85° C

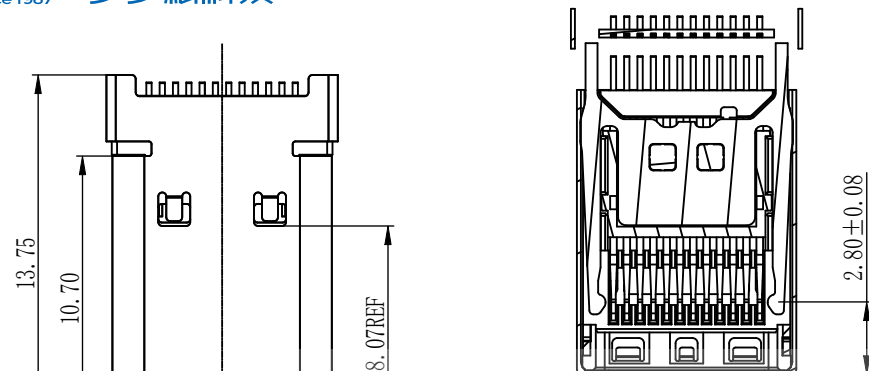

Recommended P. C. B Layout

Tolerance ±0.05


A12	A11	A10	A9	A8	A7	A6	A5	A4	A3	A2	A1
GND	RX2+	RX2-	Vbus	SBU1	D-	D+	CC1	Vbus	TX1-	TX1+	GND
GND	TX2+	TX2-	Vbus	CC2	D+	D-	SBU2	Vbus	RX1-	RX1+	GND
B1	B2	B3	B4	B5	B6	B7	B8	B9	B10	B11	B12

G	EMI	2	SUS301	---
F	CONTACT	12	C7025	Au:1u"
E	TOP COVER	1	LCP+30%GF, UL 94V-0	BLACK
D	BOTTOM COVER	1	LCP+30%GF, UL 94V-0	BLACK
C	GND PIN	1	SUS301	30u" min NI on SN Plating
B	CONTACT	12	C7025	Au:1u"
A	SHELL	1	SUS301	50~100u"NICKEL Plating
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR


THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG,NO: 0366-2

深圳市步步精科技有限公司		NAME: TYPE-C 24P 公头 铆合款 沉板0.95 双排SMT 两脚插 L=13.75 带塞子 编带	
.X: ±0.38 .X°: ±3° .XX: ±0.25 .X°: ±2° .XXX: ±0.13 .XX°: ±1°		P.J. NO.: 126-124-240002-N5G	
APPD. JM_Zheng		SIZE: A4 DRW NO.:	
CHKD. LYX		FINISH: SEE NOTES MAT'L: SEE NOTES	
DR. SGF		SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2	


REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0		Initial release	/	SGF

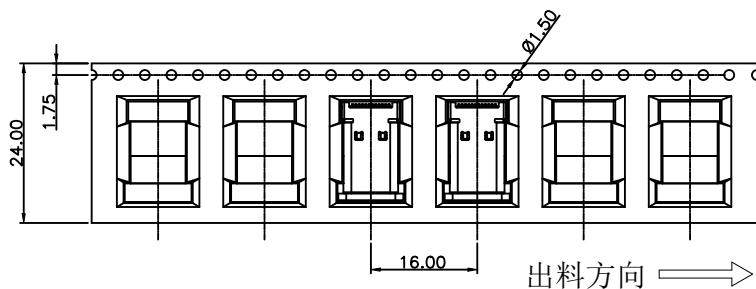


① 产品入载带示意图

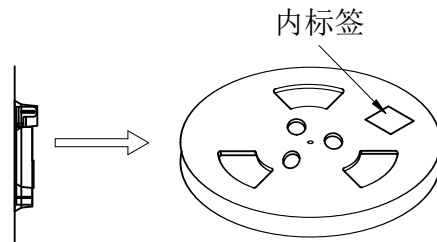

② 卷盘贴标签示意图

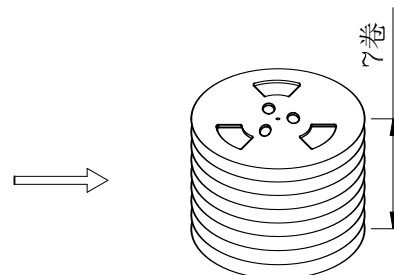


③ 7盘产品叠层示意图

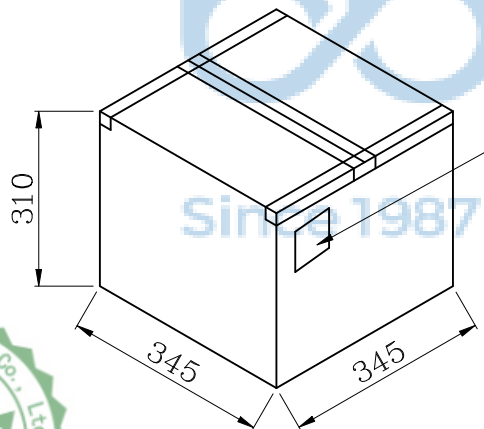

⑤ 外箱封箱示意图

成品标签

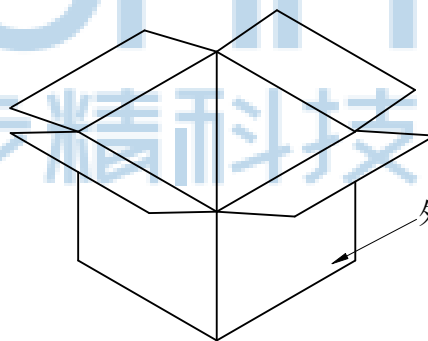

④ 产品入外箱示意图

	REEL	CARTON
CONNECTOR (PCS)	1000	7000



包装说明:

- 将检验好的成品;对插口朝前放入载带;每卷装1000PCS产品;具体如图一所示
- 将包装好的产品;每盘必需贴上内标签;具体如图二所示
- 将贴好内标签的产品每7盘叠;具体如图三所示
- 装好后并封好纸箱及贴好相关标签;具体如图五所示;
(产品包装的标签,如客户有要求,请按客户要求包装出货)
- 载带前面留22PCS空格,后面留22PCS空格

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. PDWG.NO: 0366-2		深圳市步步精科技有限公司		NAME: TYPE-C 24P 公头 铜合款 沉板0.95 双排SMT 两脚插 L=13.75 带塞子 编带	
APPD.	JM_Zheng	P.J. NO.: 126-124-240002-N5G		SIZE: A4 DRW NO.:	
CHKD.	LYX	FINISH: SEE NOTES		MAT' L.: SEE NOTES	
DR.	SGF	SCALE: N/A		REV.: A0	
		UNIT: mm		PAGE: 2/2	