
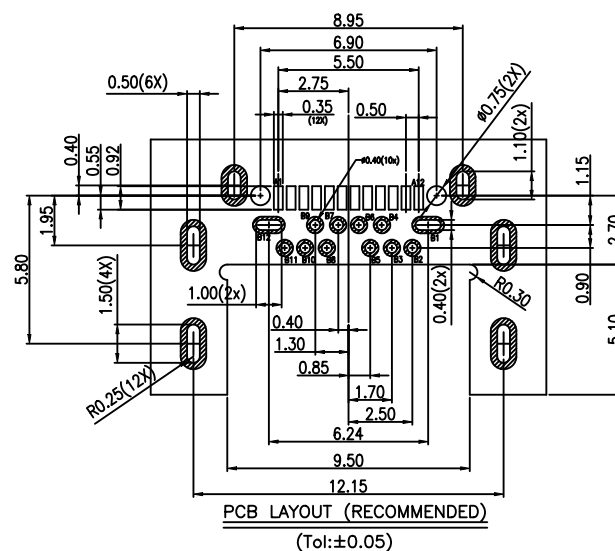
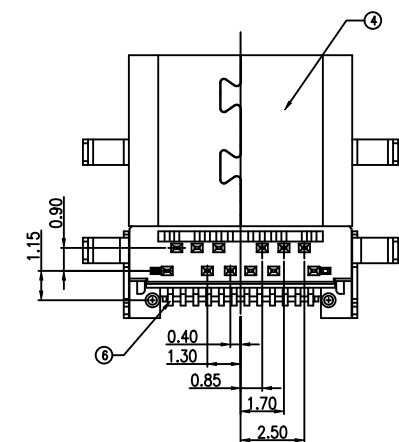
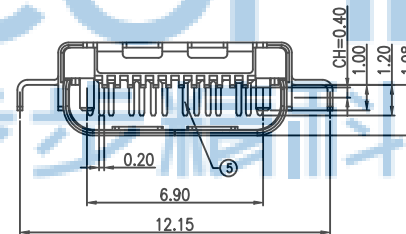
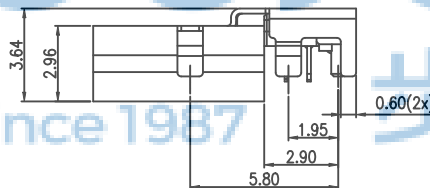
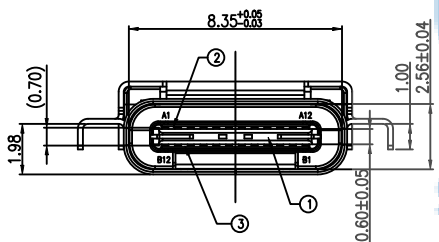

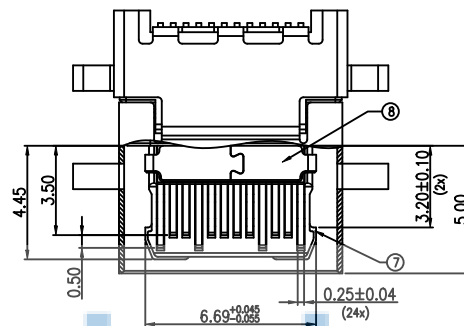


REV.	ECN NO	CONTENT	DATE	ENGINEER
A0				





1. Electrical Performance:
Current Rating: 5A on Vbus/ 1.25A on Vconn/ 0.25A on others
Insulation Resistance: 100MΩ MIN;
Dielectric Voltage: 100 VAC/minute;
Contact Resistance: 40mΩ Max for initial;
2. Mechanical Performance:
Insertion Force: 5~20N
Extraction Force: 8~20N
Durability: 10,000 Times

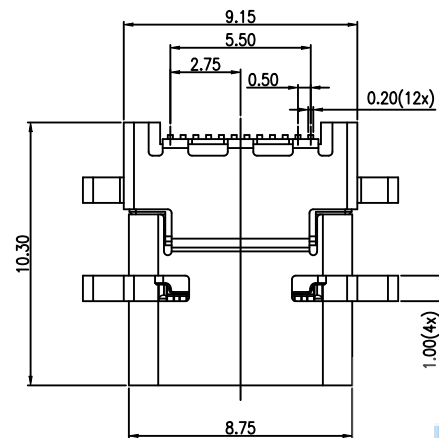

PIN	Signal Name	PIN	Signal Name
A1	GND	B12	GND
A2	SSTXp1	B11	SSRXp1
A3	SSTXn1	B10	SSRXn1
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	Dp1	B7	Dn2
A7	Dn1	B6	Dp2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10	SSRXn2	B3	SSTXn2
A11	SSRXp2	B2	SSTXp2
A12	GND	B1	GND

ITEM	PARTS NAME	Q'TY	MATERIAL	FINISH/REMARK
1	Insertmold housing	1	LCP	Black
2	12pin Insertmold-(1)	1	LCP	Black
3	12pin Insertmold-(2)	1	LCP	Black
4	SHELL	1	SUS304	Ni:50u" Min
5	12pin Contact-(DIP)	12	COPPER ALLOY C7025	Gold flash on contact area 100u" Tin on solder tails, base Nickel:50u"
6	12pin Contact-(SMT)	12	COPPER ALLOY C7025	Gold flash on contact area 100u" Tin on solder tails, base Nickel:50u"
7	Latch	1	SUS	base Nickel:50u" Min :Tin:80u" Min Over All
8	Ground plate	1	SUS	Ni:50u" Min

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. PDWG.NO: 0366-2		深圳市步步精科技有限公司 .X: ±0.38 .X': ±3" .XX: ±0.25 .X': ±2" .XXX: ±0.13 .XX': ±1"		NAME: TYPE-C 24P 母座 L=10.30 CH=0.40 沉板1.98 六脚插 带柱 端子DIP+SMT APPD. JM_Zheng CHKD. LYX DR. TSP		PJ. NO.: UC.01.32-1W-0022 SIZE: A4 DRW NO.: FINISH: SEE NOTES MAT'L.: SEE NOTES SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2	
---	--	--	--	--	--	---	--

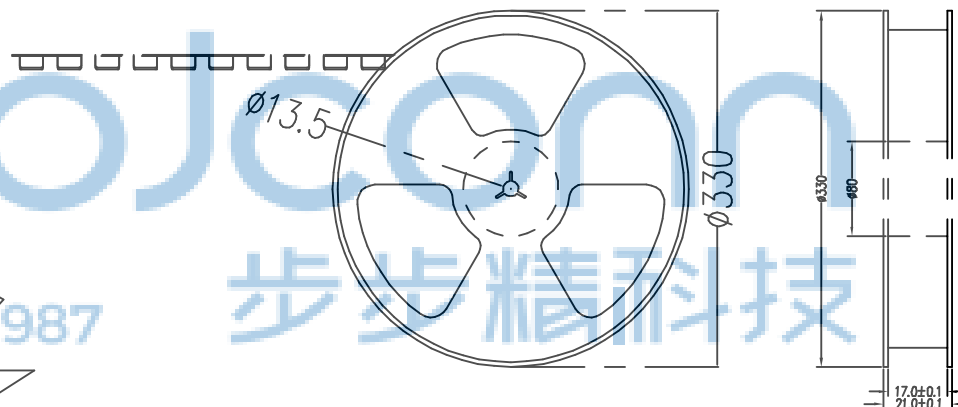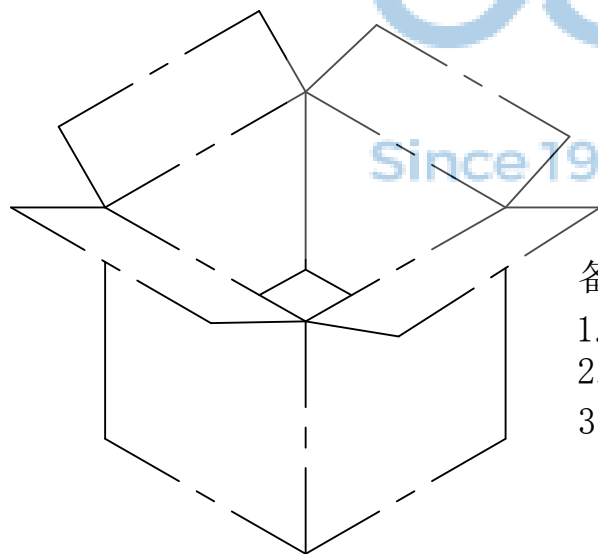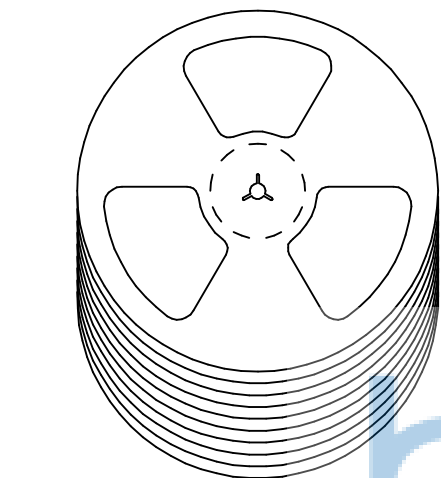

备注:

- 包装数量: 1000/PCS/卷, 10卷/箱。
- 包装袋长度: 每卷前后各空10-20个空格, 中间包装。
- 材质:
 - 载体: 聚丙烯 (PS), 阻抗 $10^{6-9} \Omega$
 - 上带: 聚乙烯 (PET), 阻抗 $10^{6-11} \Omega$
 - 卷盘: 聚苯乙烯。

纸箱规格: 345*345*23MM

纸箱规格: 345*345*35MM

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. PDWG.NO: 0366-2		深圳市步步精科技有限公司		NAME: TYPE-C 24P 母座 L=10.30 CH=0.40 沉板1.98 六脚插 带柱 端子DIP+SMT	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	X*: ±3* .X*: ±2* .XX*: ±1*	APPD.	JM_Zheng	PJ. NO.: UC.01.32-1W-0022	
CHKD.	LYX	SIZE: A4	DRW NO.:	FINISH: SEE NOTES	MAT'L.: SEE NOTES
DR.	TSP	SCALE: N/A	REV.: A0	UNIT: mm	PAGE: 2/2