





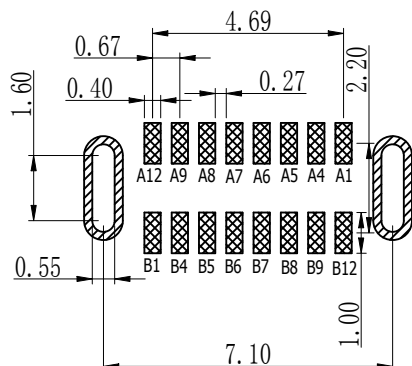


RECOMMENDED PCB LAYOUT (t=0.80±0.05)
COMPONENT SIDE (GENERAL TOLERANCE: ±0.05)




REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0				

NOTES:
1. MECHANICAL:
MATING FORCE: 5-20N .
UNMATING FORCE: 8-20N .
DURABILITY: 10000 CYCLES MIN.
2. ELECTRICAL:
CURRENT: 5.0A MAX
VOLTAGE: 20V MAX
WITHSTANDING VOLTAGE: 100V AC
CONTACT RESISTANCE: 40 mΩ MAX INITIAL;
50 mΩ MAX AFTER 10000 CYCLES
3. ENVIRONMENTAL
OPERATING TEMPERATURE RANGE -30° C ~ +80° C

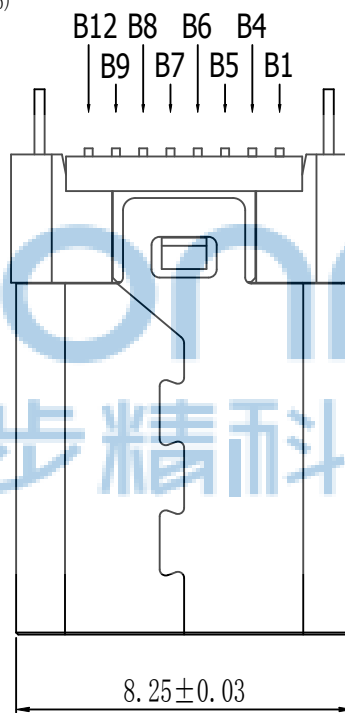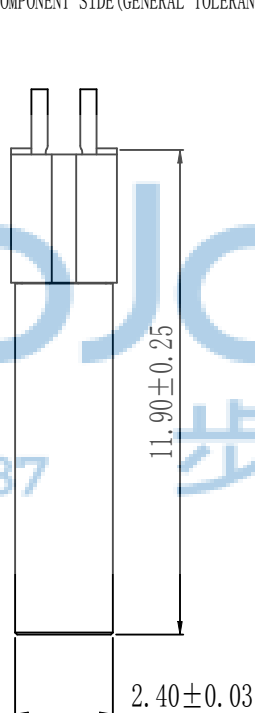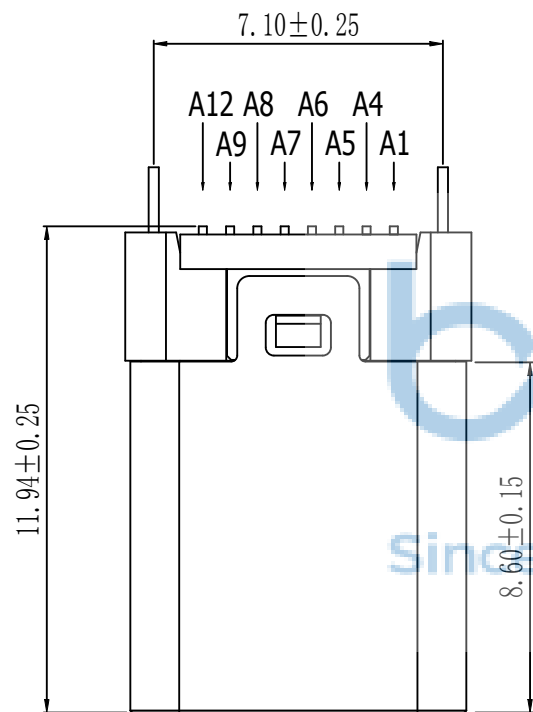

USB TYPE C 接线示意图	
A4、A9、B9、B4	V
A5	
B5	
A1、A12、B1、B12	G
A6	D+
A7	D-
(R1=56KΩ R3=56KΩ) 5%	


规格
LCP黑
LCP白
PA9T黑
PA9T白

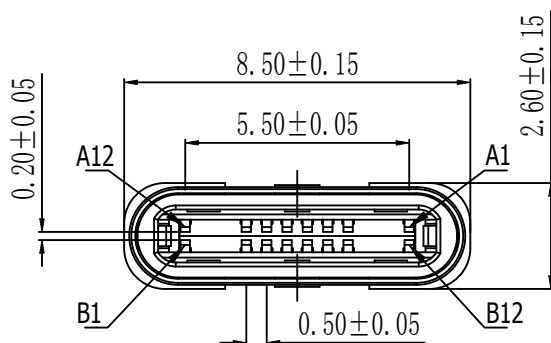


NO.	DESCRIPTION	QTY.	MATERIAL	TREATMENT
④	GND LATCH	1	STAINLESS STEEL	NI 30u" Min. PLATED OVERALL, TAB WITH LEAD FREE TIN 50u"Min.
③	CONTACT	16	COPPER ALLOY	NI 30u" Min. UNDER PLATING OVER ALL, G/F PLATING AT - CONTACT AREA, LEAD FREE TIN 50u"Min. AT TERMINATION.
②	SHELL	1	STAINLESS STEEL	Ni 30u" Min. UNDER PLATED OVER ALL.
①	HOUSING	2	THERMOPLASTIC UL 94V-0	MOLDED COLOR: BLACK/WHITE

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co., Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG.NO: 0366-2


深圳市步步精科技有限公司			
. X: ±0.38 . XX: ±0.25 . XXX: ±0.13		X° :±3° . X° :±2° . XX° :±1°	
NAME: TYPE-C 16P 公头 直立式 贴片 两脚插 端子SMT H=11.94 黑胶 加盖		P.J. NO.: UC.02.61-1W-0001	
APPD. JM_Zheng		SIZE: A4 DRW NO.:	
CHKD. LYX		FINISH: SEE NOTES MAT' L.: SEE NOTES	
DR. TSP		SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2	

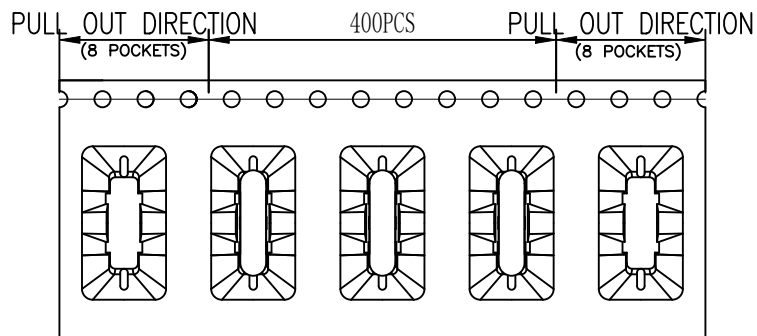


① 产品入载带示意图




② 卷盘贴标签示意图



③ 11盘产品叠层示意图

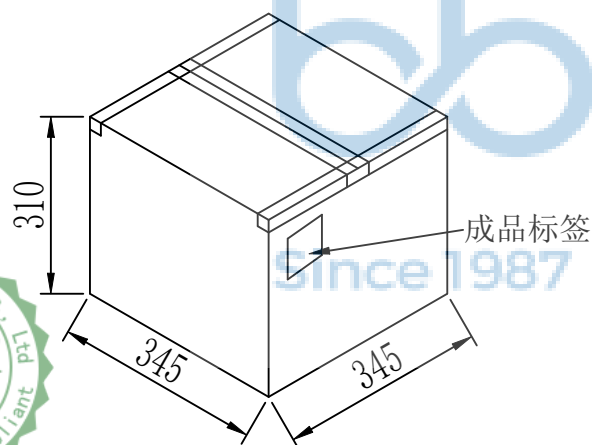

⑤ 外箱封箱示意图

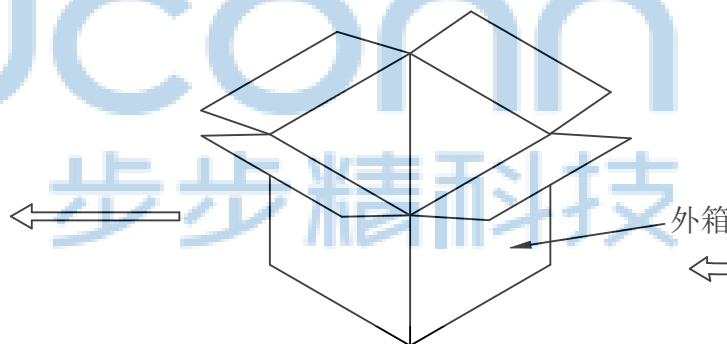

④ 产品入外箱示意图



包装说明:

1. 将检验好的成品;对插口朝前放入载带;每卷装400PCS产品;具体如图一所示
2. 将包装好的产品;每盘必需贴上内标签;具体如图二所示
3. 将贴好内标签的产品每11盘叠;具体如图三所示
5. 装好后并封好纸箱及贴好相关标签;具体如图五所示;
(产品包装的标签,如客户有要求,请按客户要求包装出货)
6. 载带前面留8PCS空格,后面留8PCS空格
7. COVER与CARRY剥离力:50-125g,速度:300mm/分钟左右,
剥离角度:165° -180°

	REEL	CARTON
CONNECTOR (PCS)	400	4400

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. PDWG.NO: 0366-2				深圳市步步精科技有限公司				
	.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X° :±3° .X° :±2° .XX° :±1°		NAME: TYPE-C 16P 公头 直立式 贴片 两脚插 端子SMT H=11.94 黑胶 加盖			
	APPD.	JM_Zheng			 P.J. NO.: UC.02.61-1W-0001			
	CHKD.	LYX			SIZE: A4 DRW NO.:			
	DR.	TSP			FINISH: SEE NOTES		MAT' L.: SEE NOTES	
				SCALE: N/A		REV.: A0	UNIT: mm	PAGE: 2/2