
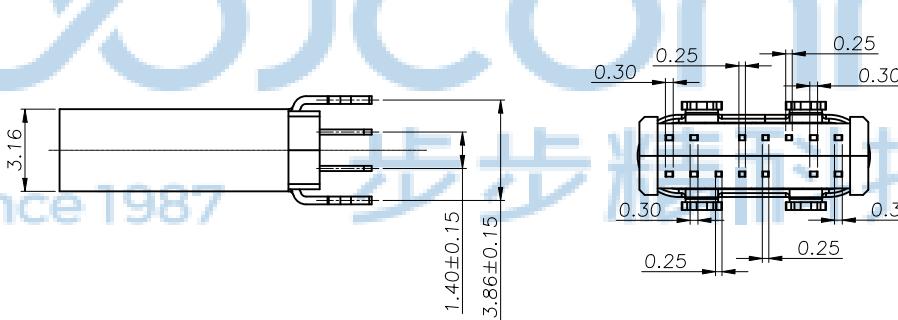


RECOMMENDED P.C.B. LAYOUT  
TOLERANCE UNSPECIFIED  $\pm 0.05\text{mm}$

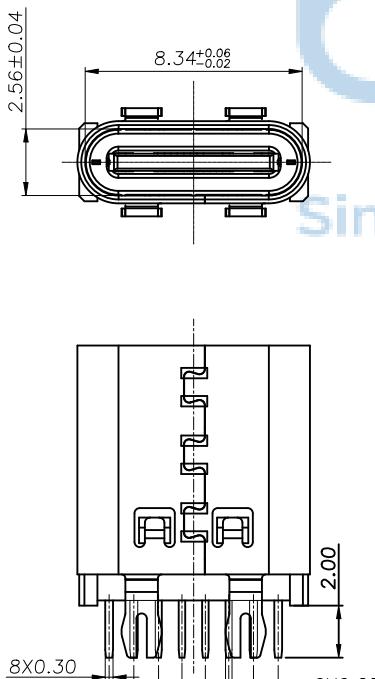

1	2	3	4	5	6	7	8
REV	ECN	NO	CONTENT	DATE	ENGINEER		
A0			INITIAL RELEASE	/	GZY		

技术参数:

- 材质及电镀: 见附表1
- 电气性能:
  - 接触电阻: 30mΩ Max FOR INITIAL, 40mΩ Max AFTER TEST.
  - 耐电压: 100V AC
  - 绝缘: 100MΩ Min
  - 额定电流: COLLECTIVELY VBUS PIN (A4,A9,B4,B9) ,TOTAL 5A VCCON PIN (B5) THROUGH GND PIN(A1,A12,B1,B12),1.25A OTHERS PIN, 0.25A
  - 工作温度: -40°C ~ 80°C.
- 机械性能:
  - 插入力: 5~20N.
  - 拔出力: 初始值8~20N测试后6~20N
  - 寿命: 10,000 CYCLES



A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B7	DN2
A6	DP1	B6	DP2
A7	DN1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

05	外壳	不锈钢	1	SUS304 1/2H,T0.30
04	二次Molding件	LCP	1	黑色 UL94 V-0
03	一次Molding件	LCP	1	黑色 UL94 V-0
02	中夹片	SUS301-H T=0.15	1	不电镀
01	端子	C7025-II T=0.15	1set	功能接触区镀金, 焊脚镀亮镍
序号	品名	材质	用量	备注


THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE PRIOR WRITTEN PERMISSION.	JM_Zheng	NAME: TYPE-C 14P 直立式 四脚插 端子DIP 脚长2.0 H=10.0 带中夹片 不锈钢外壳 编带
APPD	LYX	PJ NO: 126-225-140001-N5G
CHKD		SIZE:A4 DRW NO:
PDWG NO:0366-2	DR	FINISH:SEE NOTES MAT'L:SEE NOTES
	GZY	SCALE:N/A REV:A0 UNIT:mm PAGE:1/2




深圳市步步精科技有限公司

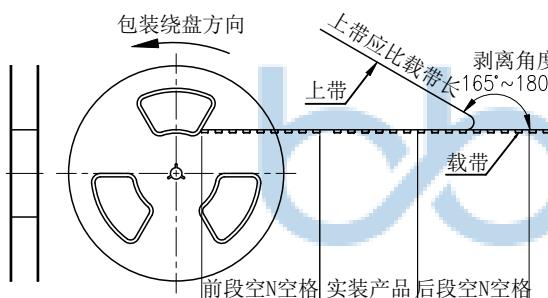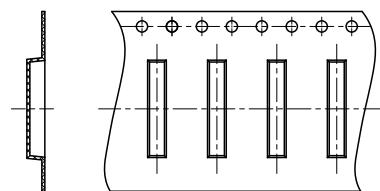

Since 1987

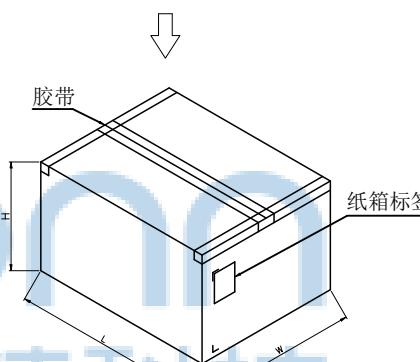

纸箱规格: W345\*L345\*H350MM

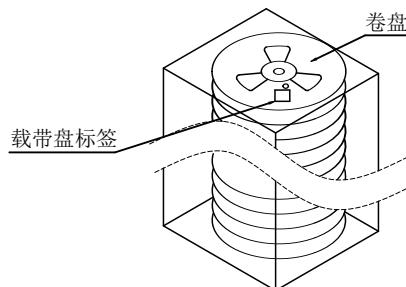

备注:

- 1、包装数量: 500/PCS/卷, 10卷/箱。
- 2、包装袋长度: 每卷前后各空10-20个空格, 中间包装。
- 3、材质:
  - 载体: 聚丙烯 (PS), 阻抗 $10^{6-9} \Omega$
  - 上带: 聚乙烯 (PET), 阻抗 $10^{6-11} \Omega$
  - 卷盘: 聚苯乙烯。

THIS DOCUMENT IS THE  
SOLE PROPERTY OF  
BBJconn Technology Co.,Ltd.  
Corporation AND SHOULD  
NOT BE USED IN WHOLE  
PRIOR WRITTEN PERMISSION.  
APPD JM\_Zheng  
CHKD LYX  
PDWG NO:0366-2

.X: ±0.38	X: ±3'	NAME: TYPE-C 14P 直立式 四脚插 端子DIP 脚长2.0
.XX: ±0.25	X: ±2'	H=10.0 带中夹片 不锈钢外壳 编带
XXX: ±0.13	XX: ±1'	
PJ NO: 126-225-140001-N5G		
SIZE:A4 DRW NO:		
FINISH:SEE NOTES		MAT'L:SEE NOTES
SCALE:N/A	REV:A0	UNIT:mm PAGE:2/2

