

REV.	ECN NO.	CONTENT	DATE	ENGINEER
A		NEWS ISSUE	2023/08/11	LYX

性能:

额定电流: 3.0A

额定电压: 24V

耐电压: 500V

接触电阻: 30mΩ MAX

绝缘电阻: 500MΩ






工作温度: -40℃~+85℃

塑件(材质): LCP, 耐高温260℃


接触点(材质): 磷铜, 触点镀金3U

焊脚镀雾锡

工业级

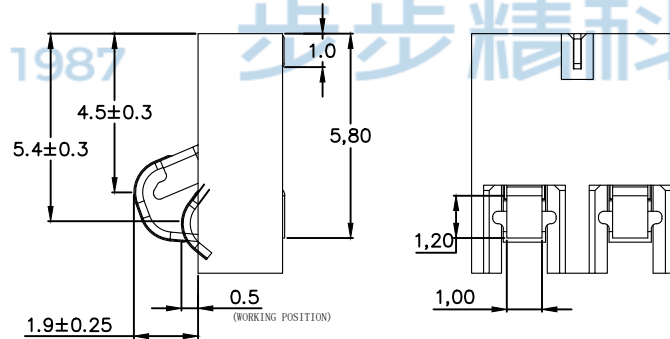

RECOMMENDED PCB LAYOUT
TOP VIEW (.XX±0.05)

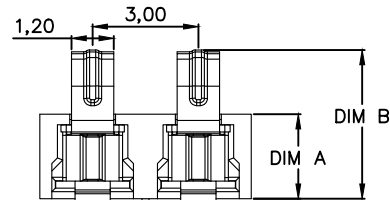


	DIM A	DIM B
BC-60-2P240	2.4	4.30±0.25
BC-60-2P350	3.5	5.40±0.25

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE PRIOR WRITTEN PERMISSION		深圳市步步精科技有限公司	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	X*: ±3" .X*: ±1" .XX*: ±1"	NAME: BC-60-2P-350全贴编带镀金3U(工业级)	
APPD.	JM_Zheng	DRW NO.:	
CHKD.	Tang	SIZE: A4 P.J. NO.:	
DR.	LYX	FINISH: SEE NOTES MAT'L.: SEE NOTES	
PDWG NO: 0859-1		SCALE: N/A REV.: A UNIT: mm PAGE: 1/2	

REV.	ECN NO.	CONTENT	DATE	ENGINEER
A		1 (: 6 , 6 6 8 (	2023/08/11	LYX

°ü×°1/2ö1©2Ĵ¿¼

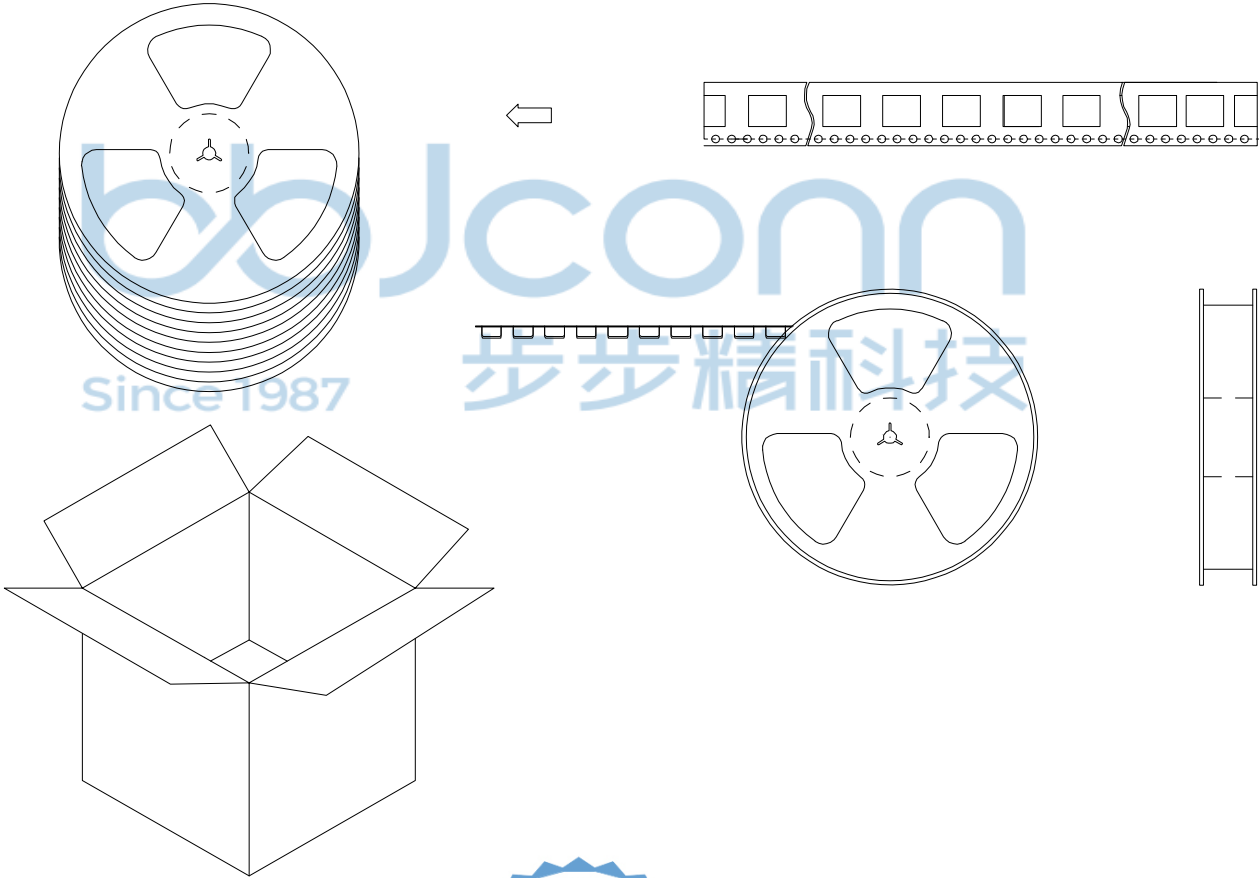

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd Corporation AND SHOULD NOT BE USED IN WHOLE PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ±0.38	X*: ±3"	NAME: BC-60-2P-350全贴编带镀金3U(工业级)	
.XX: ±0.25	.X*: ±1"	DRW NO.:	
.XXX: ±0.13	.XX*: ±1"	SIZE: A4 PJ. NO.:	
APPD. JM_Zheng	CHKD. Tang	FINISH: SEE NOTES MAT'L.: SEE NOTES	
PDWG NO: 0859-1	DR. LYX	SCALE: N/A REV.: A UNIT: mm PAGE: 2/2	