

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

- ELECTRICAL:
CURRENT:5A
CONTACT RESISTANCE:40 MILLIOHMS MAX
DIELECTRIC WITHSTANDING VOLTAGE: 200V AC
INSULATION RESISTANCE:100 MEGOHMS MIN
- MECHANICAL:
MATING FORCE:5-20N
WITHDRAWAL FORCE:8-20N
DURBILITY:10000 CYCLES
- ENVIRONMENTAL:
TEMPERTURE RANGE -40°C~105°C
SALT TESTING:24 HOURS

材质:

塑胶:PA9T 蓝胶
端子:黄铜C2680 (0.25厚 过5A)
外壳:不锈钢201
中片:不锈钢301





电镀:

端子:1u"
外壳:镀镍



A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司 .X: ±0.38 .X': ±3" .XX: ±0.25 .X': ±2" .XXX: ±0.13 .XX': ±1"		NAME: TYPE-C 14P 母座 直立式 H=10.0 四脚插 鱼叉脚 端子DIP 缺P 端子脚长1.3 PA9T蓝胶 PJ. NO.: 126-225-140002-N7G SIZE: A4 DRW NO.: FINISH: SEE NOTES MAT'L.: SEE NOTES	
APPD.	JM_Zheng			SCALE: N/A	
CHKD.	LYX	REV.: A0		UNIT: mm	PAGE: 1/2
PDWG.NO:	0545-1	DR.	TSP		

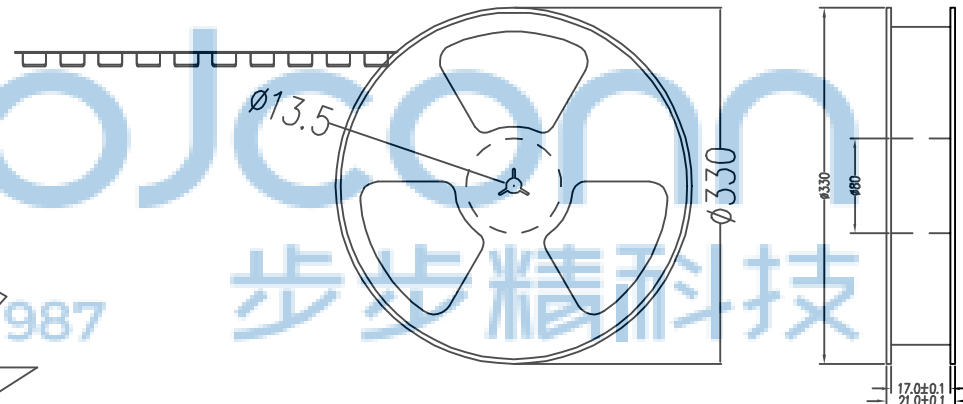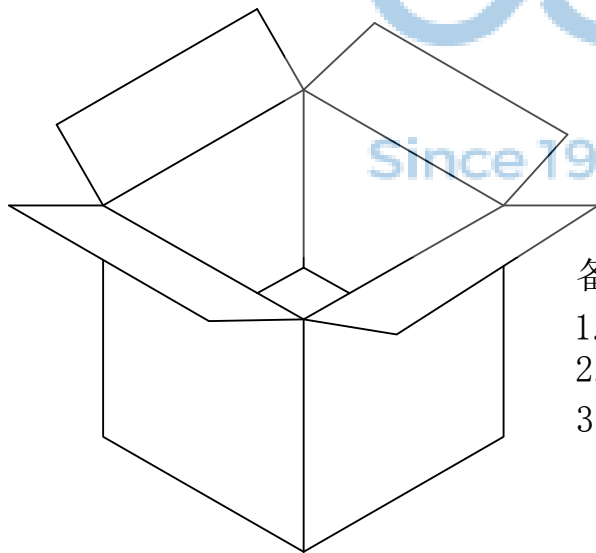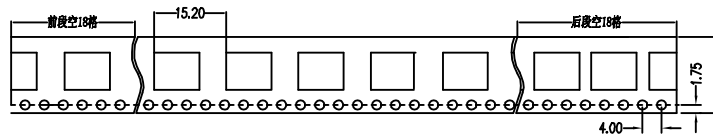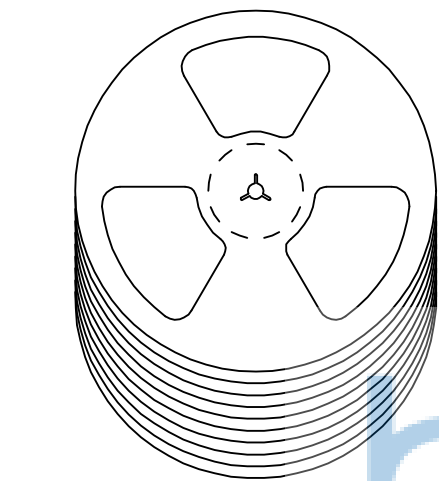

备注:

1. 包装数量: 600/PCS/卷, 10卷/箱。
2. 包装袋长度: 每卷前后各空10-20个空格, 中间包装。
3. 材质:
载体: 聚丙烯 (PS), 阻抗 $10^{6-9} \Omega$
上带: 聚乙烯 (PET), 阻抗 $10^{6-11} \Omega$
卷盘: 聚苯乙烯。

纸箱规格: 345*345*23MM

纸箱规格: 345*345*35MM

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		NAME: TYPE-C 14P 母座 直立式 H=10.0 四脚插 鱼叉脚 端子DIP 缺P 端子脚长1.3 PA9T蓝胶	
APPD. JM_Zheng		PJ. NO.: 126-225-140002-N7G	
CHKD. LYX		SIZE: A4 DRW NO.:	
PDWG.NO: 0545-1		FINISH: SEE NOTES MAT'L.: SEE NOTES	
DR. TSP		SCALE: N/A REV.: AO UNIT: mm PAGE: 2/2	