


REV	ECN NO	CONTENT	DATE	ENGINEER
A0		INITIAL RELEASE	/	SGF

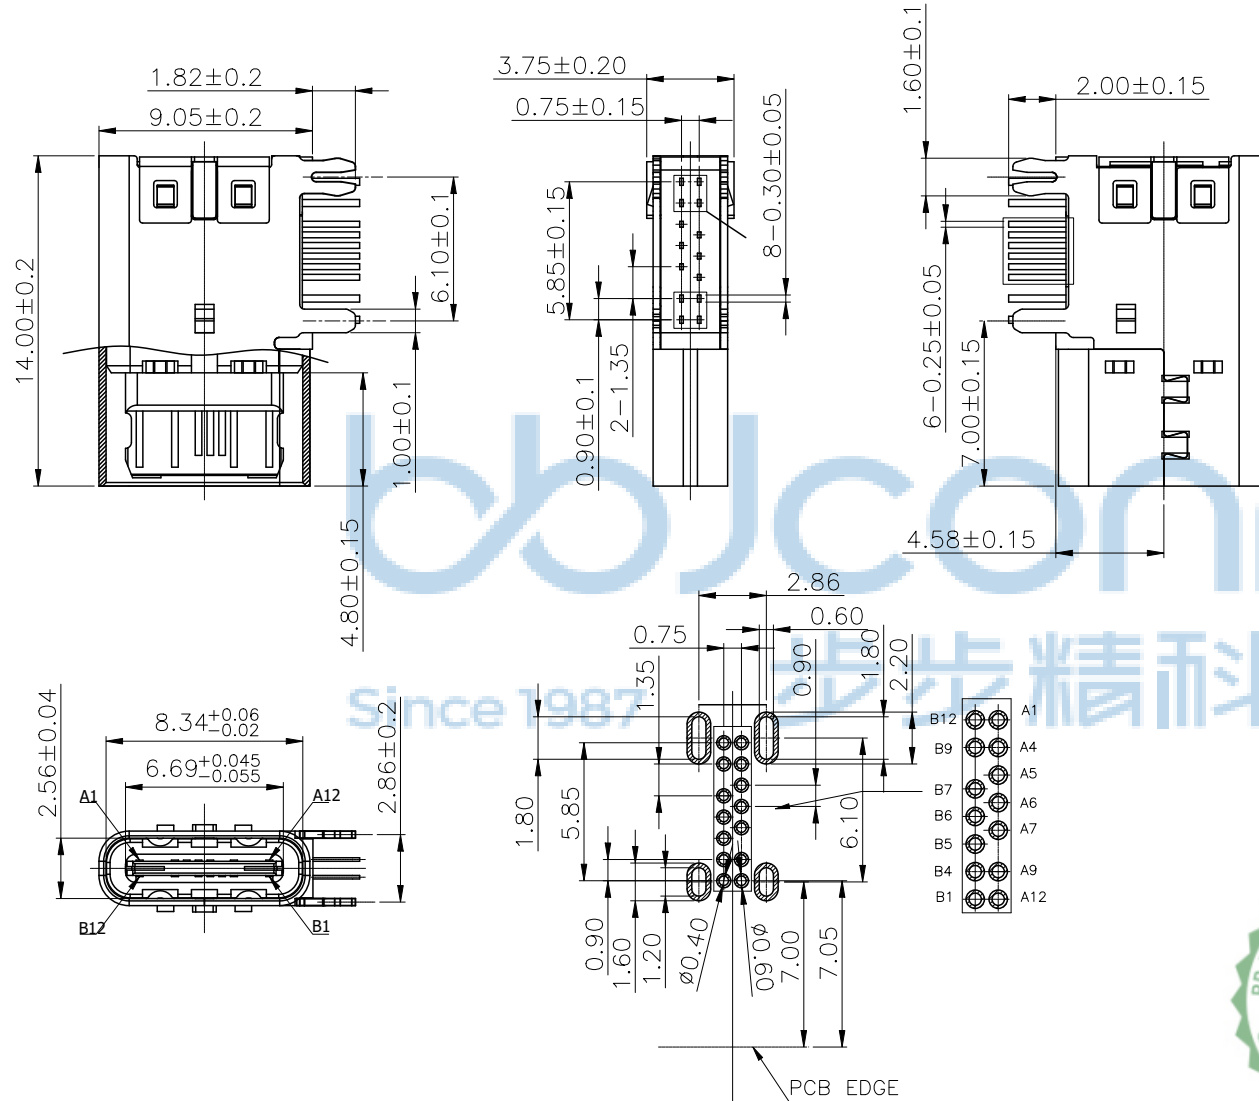

特性:

一、电气性能: ELECTRICAL

1. 额定电流: 3.0A MAX
2. 接触阻抗: 30 MILLIOHMS MAX
3. 耐电压: 150V AC / 1 mA MAX
4. 绝缘阻抗: 150V DC/100 MEGA OHMS MIN

二、机械性能:

1. 插入力: 5-20N
2. 拨出力: 8-20N
3. 使用寿命: 10000次

三、材料: MATERIAL

1. 外壳: SUS304 h T=0.30mm
2. 后盖: SUS304 h T=0.25mm
3. 中夹片: SUS301 3/4H T=0.15mm
4. PIN针: 黄铜 EH T=0.15mm
5. 塑胶: LCP+30%G.F黑色

四、电镀: FINISH

1. 端子: 接触点镀金1u"±20%
PIN脚焊接区域镀金G/F.
2. 外壳: 镀镍50U"Min (盐雾24H)

五、电镀品需做粘锡测试: 粘锡面积达到95%以上。

六、SMT回流焊 (峰值260° C±5° C) 不能起泡、
熔胶、变色不良 (变形在公差范围以内)

七、工作温度: -55° C~+85° C

八、盐雾测试:

通过24H在浓度为5±1%盐水的盐雾测试无生锈现象;

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm


PIN
ASSIGNMENT

A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12
GND	/	/	VBUS	CC1	D+	D-	/	VBUS	/	/	GND
B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1
GND	/	/	VBUS	/	D-	D+	CC2	VBUS	/	/	GND




THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司 .X: ±0.38 X': ±3" .XX: ±0.25 X'': ±2" .XXX: ±0.13 .XX': ±1"		NAME: TYPE-C 14P 母座 侧插 L=14.00 四脚插 端子DIP脚长2.0 编带	
APPD	JM_Zheng	PJ NO: 126-228-140001-H8G		SIZE:A4 DRW NO:	
CHKD	LYX	FINISH:SEE NOTES		MAT'L:SEE NOTES	
PDWG NO: 0482-1	DR	SGF	SCALE:N/A	REV:A0	UNIT:mm PAGE:1/2



REV	ECN NO	CONTENT	DATE	ENGINEER
A0		INITIAL RELEASE	/	SGF





产品




吸塑盘: 150PCS/盘

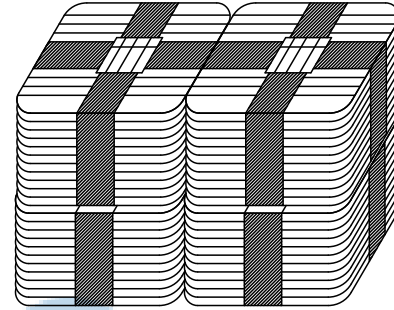

吸塑盘: 10盘/扎

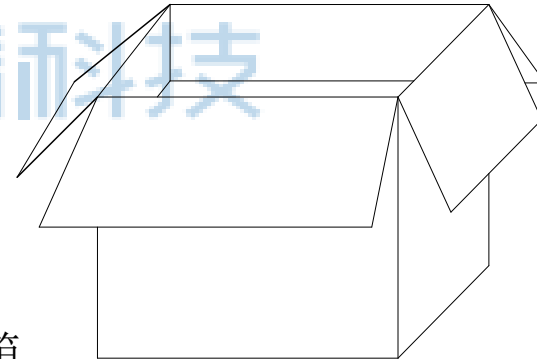

纸箱: 6K/箱

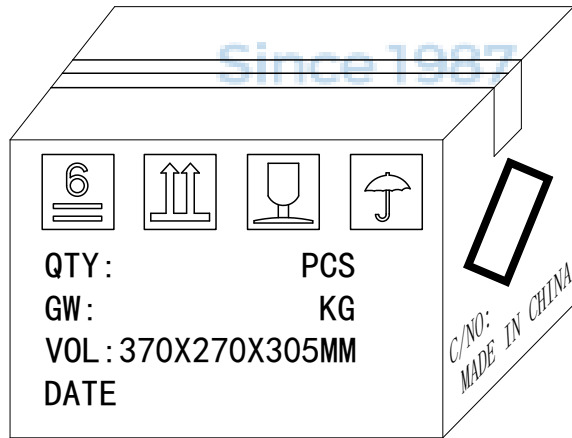

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司 工程部	
.X: ±0.38 X': ±3" .XX: ±0.25 X": ±2" .XXX: ±0.13 .XX': ±1"		NAME: TYPE-C 14P 母座 侧插 L=14.00 四脚插 端子DIP脚长2.0 编带	
APPD	JM_Zheng	PJ NO: 126-228-140001-H8G SIZE:A4 DRW NO:	FINISH:SEE NOTES MAT'L:SEE NOTES SCALE:N/A REV:A0 UNIT:mm PAGE:2/2
CHKD	LYX		
PDWG NO: 0482-1	DR	SGF	