

REV.	DESCRIPTION	NAME	DATE
A	NEWS ISSUE		

Note:

1. Material:

- 1.1 Housing: PA9T
- 1.2 Contact: C5191, t=0.20mm
- 1.3 Shell: Powder metallurgy

2. ELECTRICAL:

2-1: CURRENT RATING:

VBUS AND GND CONTACTS RATED AT 1.25A
PARALLELED FOR A TOTAL OF 5A;

2-2: INITIAL CONTACT RESISTANCE : 40 MEGOHMS

2-3: DIELECTRIC WITHSTANDING VOLTAGE:

100V AC MIN;

3: MECHANICAL CHARACTERISTICS:

3-1: MATING FORCE: 5~20N

3-2: UNMATING FORCE: 8~20N (INITIAL),
6~20N (AFTER 10000 CYCLES)

3-3: FREQUENCY: 200±50 CYCLES / HOUR, 10000 CYCLES

3-4: OPERATING TEMPERATURE ; -40° ~ 80° .




TABLE B

A5	CC1	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B5	CC2
PIN	SIGNAL NAME	PIN	SIGNAL NAME


X.	±0.50	X.*	± 2°
.X	±0.30	.X*	± 1°
.XX	±0.10	.XX*	± 0.5°
.XXX	±0.05		

深圳市步步精科技有限公司


TITLE: TYPE-C 6P 防水母座 板上型 后两脚插 带柱 舌片外漏0.95
L=6.65 CH1.64 粉末冶金 端子SMT IPX7

DRAWN/ DATE	设计	LYX	SIZE:A4	UNIT:MM.	PART. NO:
CHECKED/ DATE	审核	HMY	SCALE: 1:1	PROJECTION	REV.: 版本
APPROVED/ DATE	核准	LJP	DWG. PATH	0366-2	SHEET: 页码

PCB LAYOUT 图仅供参考

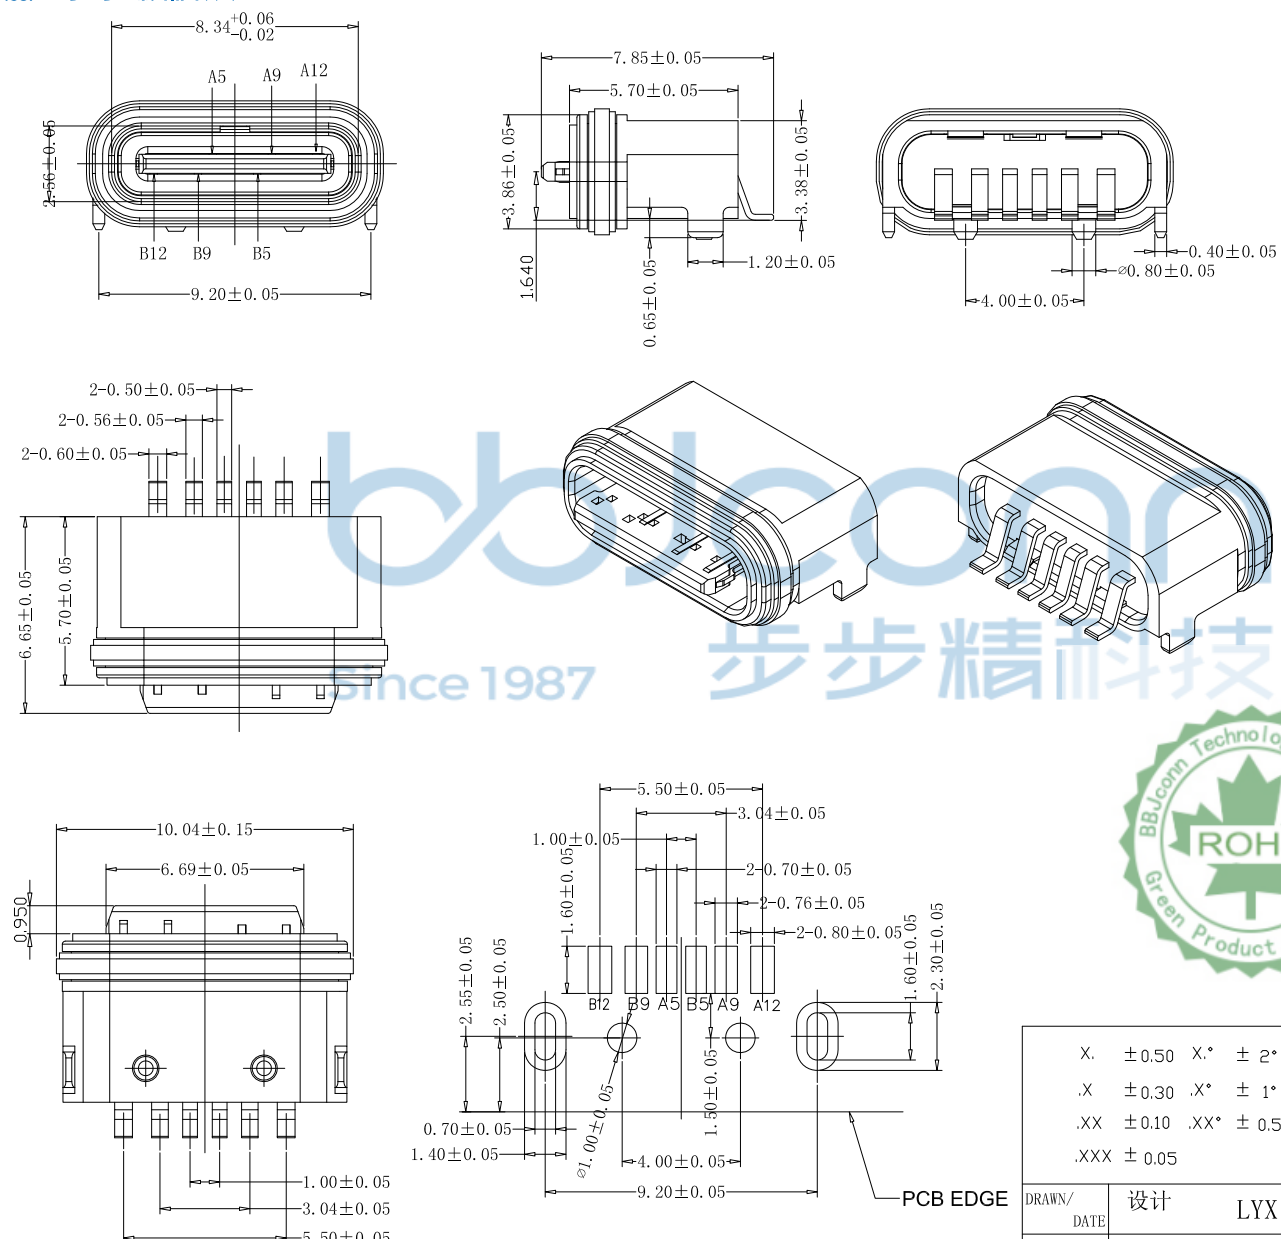

REV.	DESCRIPTION	NAME	DATE
A	NEWS ISSUE		

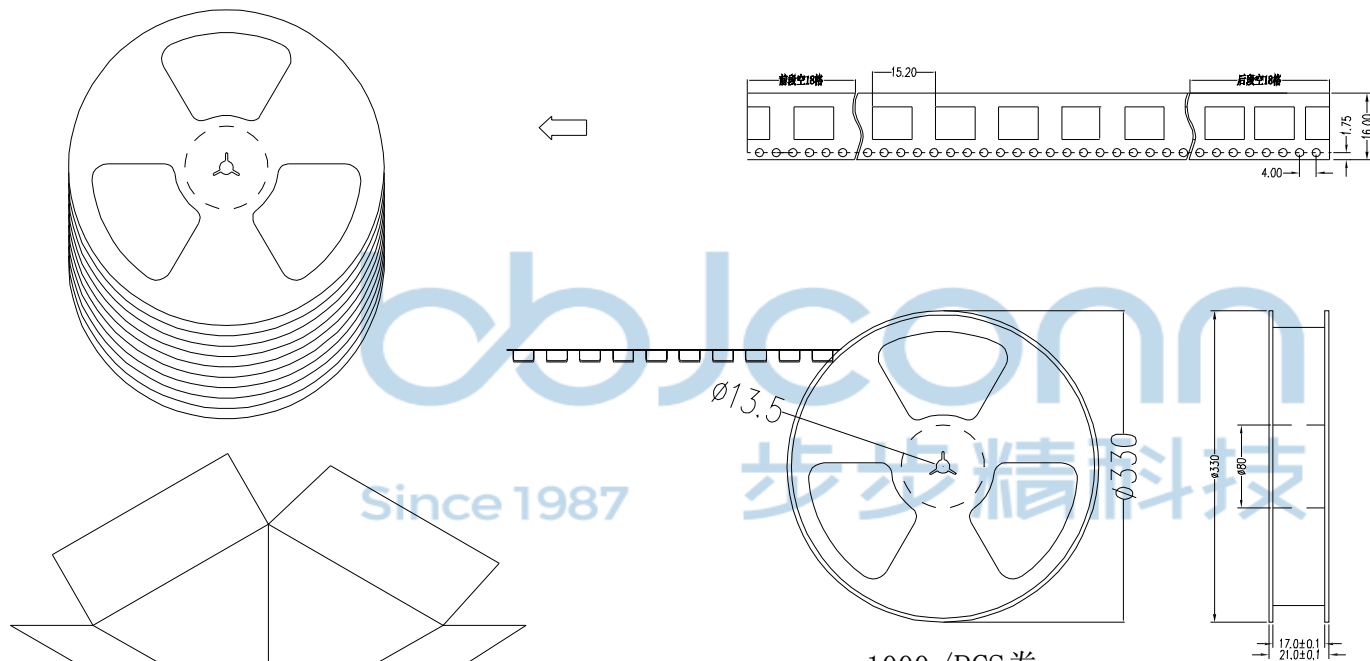

1000 /PCS卷

备注:

1. 包装数量: 1000 /PCS/卷, 10卷/箱或15卷/箱。
2. 包装袋长度: 每卷前后各空10-20个空格, 中间包装。
3. 材质:
载体: 聚丙烯 (PS), 阻抗 $10^{6-9} \Omega$
上带: 聚乙烯 (PET), 阻抗 $10^{6-11} \Omega$
卷盘: 聚苯乙烯。

纸箱规格: 345*345*350 MM



深圳市步步精科技有限公司

TITLE: TYPE-C 6P 防水母座 板上型 后两脚插 带柱 舌片外漏0.95
L=6.65 CH1.64 粉末冶金 端子SMT IPX7

TOLERANCE UNSPECIFIED		SIZE:A4		UNIT:MM.	PART. NO:	
.0	±0.35	设计	LYX			
.00	±0.25	审核	HMY	SCALE: 1:1	PROJECTION	REV.: 版本
.000	±0.15	核准	LJP	DWG. PATH		SHEET: 页码
X.°	±2.00°				0366-2	
CUSTOMER DRAWING						