






RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

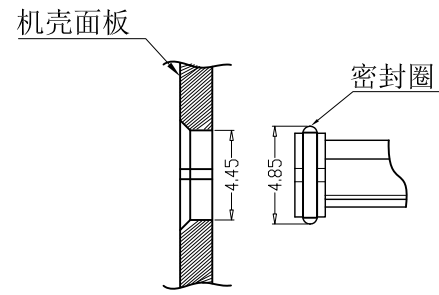

前后组装方式

REV.	DESCRIPTION	NAME	DATE
A	NEWS ISSUE		

Note:
1. Material:
1.1 Housing: LCP
1.2 Contact: C2680, t=0.20mm middleclip SUS t=0.15mm
1.3 Shell: Zinc Alloy.
2. ELECTRICAL:
2-1: CURRENT RATING:
VBUS AND GND CONTACTS RATED AT 1.25A
PARALLELED FOR A TOTAL OF 3A;
2-2: INITIAL CONTACT RESISTANCE : 40 MEGOHMS
2-3: DIELECTRIC WITHSTANDING VOLTAGE:
30V AC MIN;
3: MECHANICAL CHARACTERISTICS:
3-1: MATING FORCE: 5~20N
3-2: UNMATING FORCE: 8~20N (INITIAL),
6~20N (AFTER 10000 CYCLES)
3-3: FREQUENCY: 200±50 CYCLES / HOUR, 10000 CYCLES
3-4: OPERATING TEMPERATURE : -40° ~ 80° .
4: WATERPROOF: IP-X7.

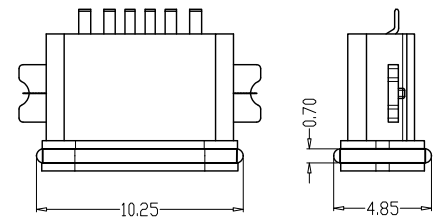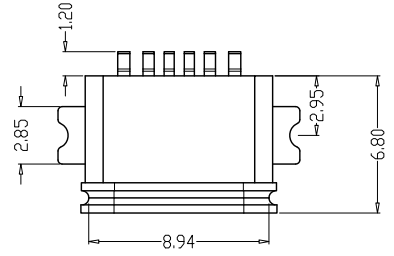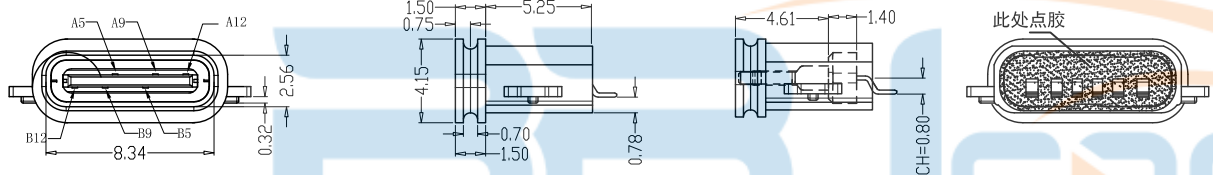

加防水圈示意图







B12	GND
B9	VBUS
B5	CC2
A5	CC1
A9	VBUS
A12	GND
PIN	SIGNAL NAME

TOLERANCE UNSPECIFIED		深圳市步步精科技有限公司	
.0	±0.20	TITLE:	
.00	±0.15	TYPE-C 6P 防水母座 L=6.80 CH=0.80 沉板0.78 端子SMT IPX7 带防水圈	
.000	±0.05	DRAWN/ DATE	设计 TSP
X.°	±2.00°	CHECKED/ DATE	审核 LYX
CUSTOMER DRAWING		APPROVED/ DATE	核准 LJP
SIZE: A4	UNIT: MM.	PART. NO:	
SCALE: 1:1	PROJECTION	REV.: 版本	
DWG. PATH	0332-1	SHEET: 页码	



REV.	DESCRIPTION	NAME	DATE
A	NEWS ISSUE		

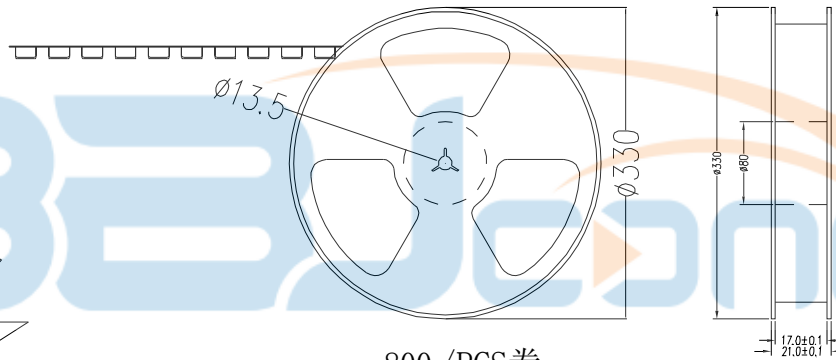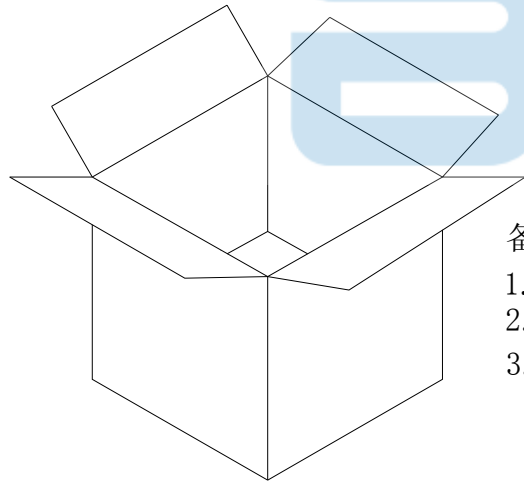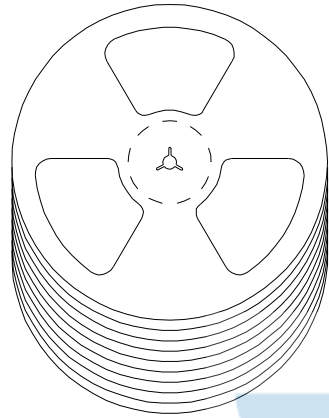

800 / PCS 卷

备注:

1. 包装数量: 800 / PCS / 卷, 10卷 / 箱或15卷 / 箱。
2. 包装袋长度: 每卷前后各空10-20个空格, 中间包装。
3. 材质:
 - 载体: 聚丙烯 (PS), 阻抗 $10^{6-9} \Omega$
 - 上带: 聚乙烯 (PET), 阻抗 $10^{6-11} \Omega$
 - 卷盘: 聚苯乙烯。

纸箱规格: 345*345*23MM
 纸箱规格: 345*345*35MM



TOLERANCE UNSPECIFIED		深圳市步步精科技有限公司 TITLE: TYPE-C 6P 防水母座 L=6.80 CH=0.80 沉板0.78 端子SMT IPX7 带防水圈					
.0	±0.35				DRAWN/	设计	TSP
.00	±0.25	DATE			SIZE: A4	UNIT: MM.	PART. NO:
.000	±0.15	CHECKED/	审核	LYX	SCALE: 1:1	PROJECTION	REV.: 版本
X. °	±2.00°	DATE	核准	LJP	DWG. PATH	0332-1	SHEET: 页码
CUSTOMER DRAWING		APPROVED/					