

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	GZY

SPECIFICATIONS:

1. MATERIAL:

- 1.1 INSULATOR:HIGH TEMPERATURE PLASTIC UL 94 V-0;BLACK (PA9T)
- 1.2 CONTACT:C5191
- 1.3 SHELL:SUS 304

2. ELECTRICAL CHARACTERISTICS:

- 2-1. CURRENT RATING:1.8A (PIN 1,4) ; OTHER CONTACTS 0.25A
- 2-2. CONTACT RESISTANCE 30mΩ Max.
- 2-3. DIELECTRIC WITHSTANDING VOLTAGE:100V AC FOR 1 MINUTE
- 2-4. INSULATION RESISTANCE:100MΩ MIN.

3. Mechanical Characteristics:

MATING FORCE: 35 N Max



Extraction FORCE:10 N Min INITIAL; 8 N Min AFTER TEST Operating

4. PLATING

4.1 TERMINAL:


- 60u" MIN NICKEL ALL OVER
- 100u"MIN Tin ON SOLDER AREA
- (1~30)u"Au ON CONTACT AREA

4.2 SHELL:60u"MIN. NICEL ALL OVER

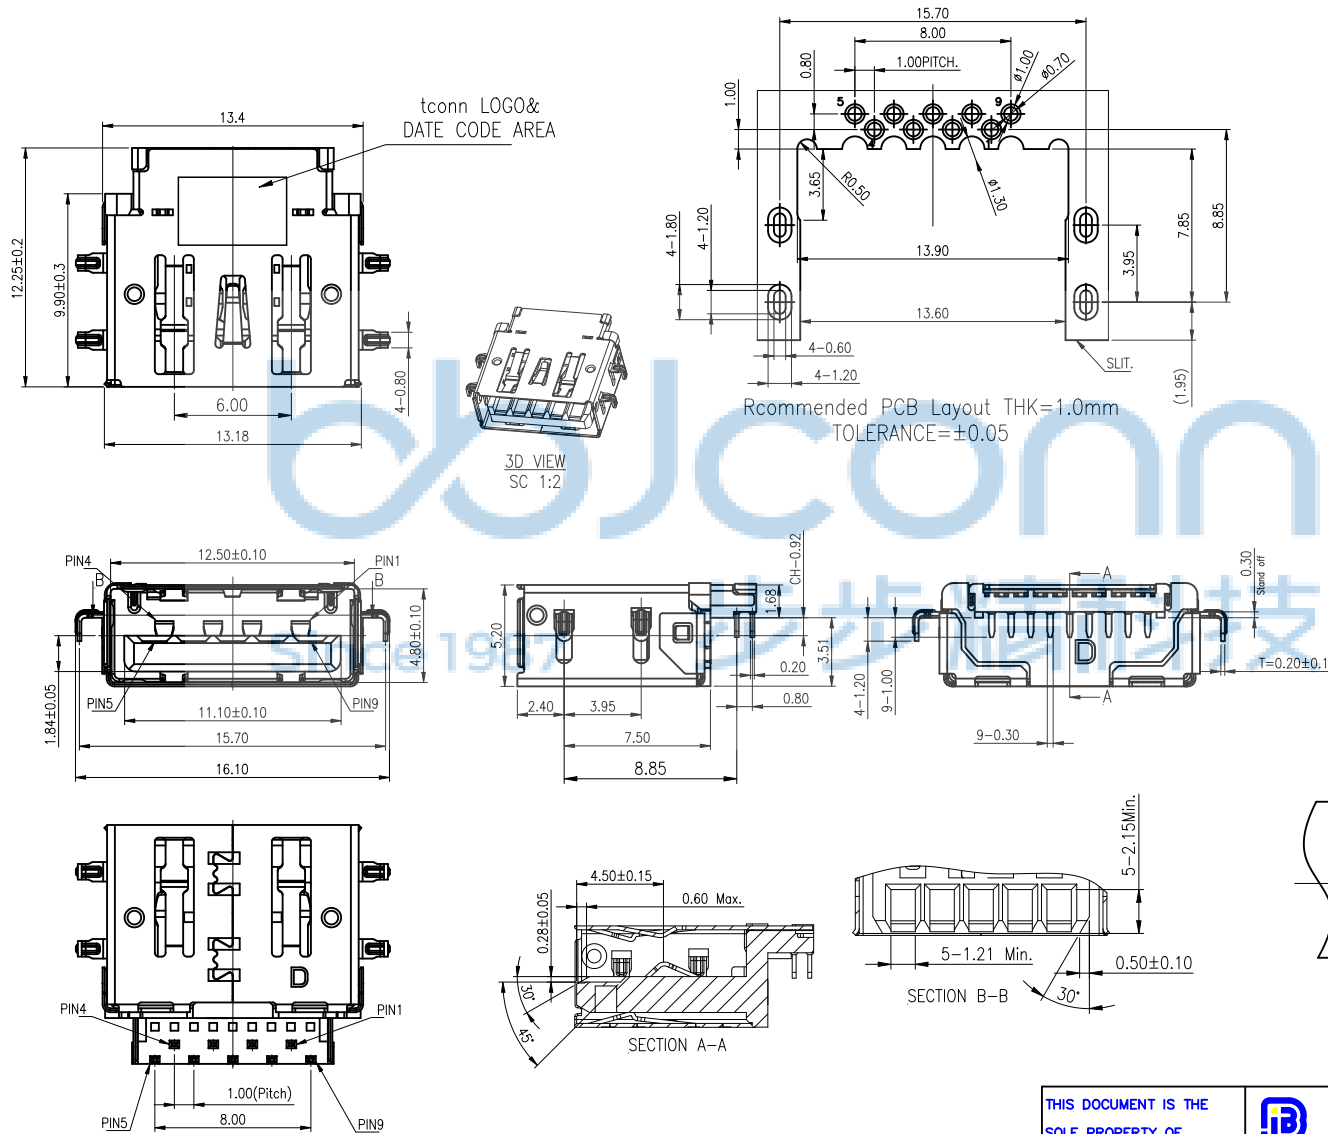

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. PDWG.NO: 0536-1		深圳市步步精科技有限公司	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X': ±3" X'': ±2" X'X': ±1"	
APPD.	JM_Zheng	NAME: USB 3.0 AF 90度 反向胶芯 沉板3.51 四脚插 端子DIP H=5.20 L=12.25 不锈钢外壳 PA9T黑色 编带	
CHKD.	LYX	PJ. NO.: 127-272-090004-P2G	
DR.	GZY	SIZE: A4 DRW NO.:	
		FINISH: SEE NOTES MAT'L.: SEE NOTES	
		SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2	

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	GZY

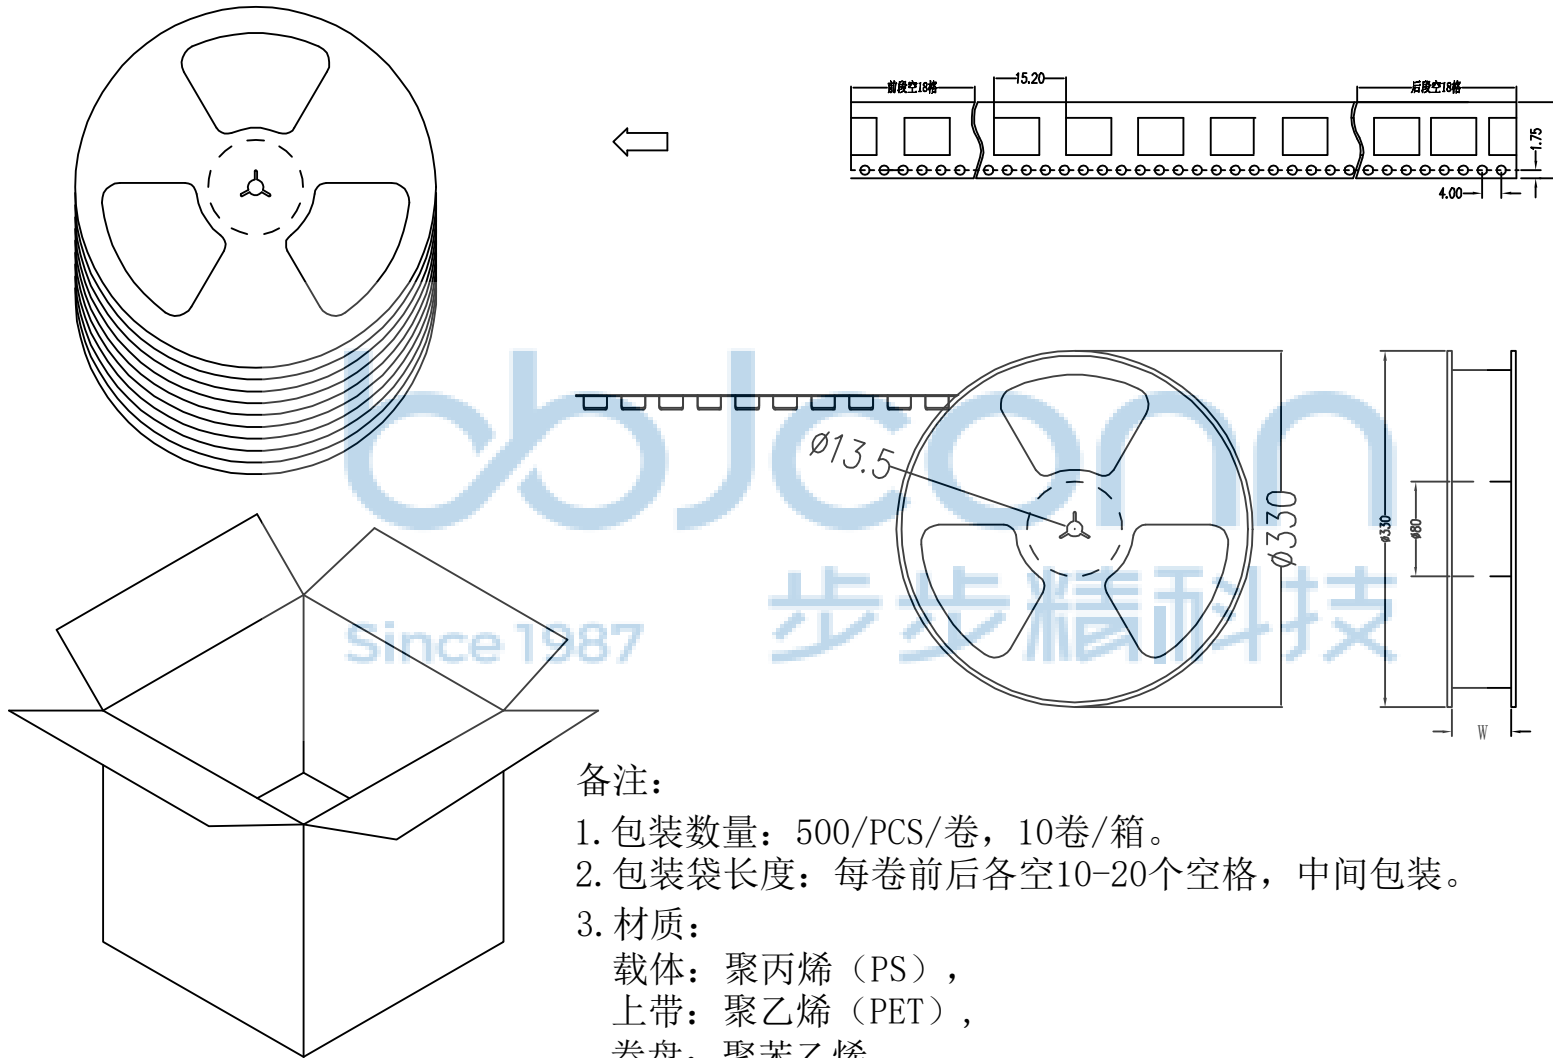

备注:

1. 包装数量: 500/PCS/卷, 10卷/箱。
2. 包装袋长度: 每卷前后各空10-20个空格, 中间包装。
3. 材质:
载体: 聚丙烯 (PS),
上带: 聚乙烯 (PET),
卷盘: 聚苯乙烯。

纸箱规格: 345*345*23MM

纸箱规格: 345*345*35MM

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X': ±3" X'': ±2" XX': ±1"	
APPD. JM_Zheng		NAME: USB 3.0 AF 90度 反向胶芯 沉板3.51 四脚插 端子DIP H=5.20 L=12.25 不锈钢外壳 PA9T黑色 编带	
CHKD. LYX		PJ. NO.: 127-272-090004-P2G	
DR. GZY		SIZE: A4 DRW NO.:	
PDWG:NO: 0536-1		FINISH: SEE NOTES MAT'L.: SEE NOTES	
		SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2	