




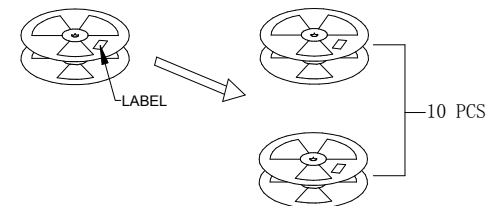


REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0		Initial release	/	TSP

36.4
32.4

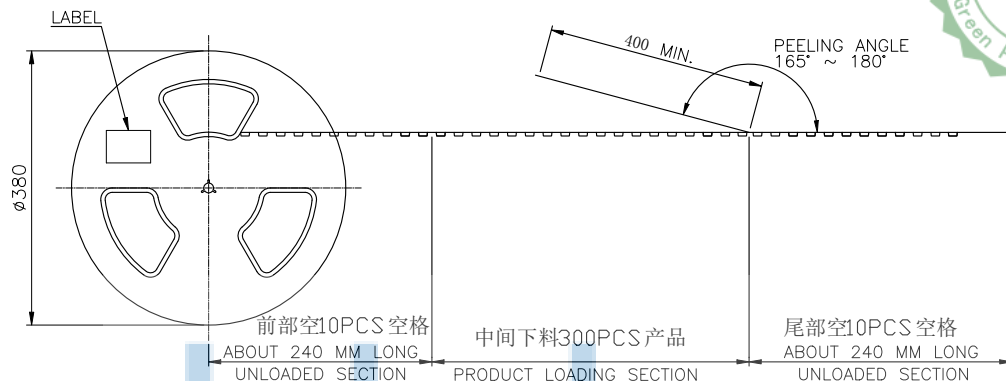


USER DIRECTION OF UNREELING →

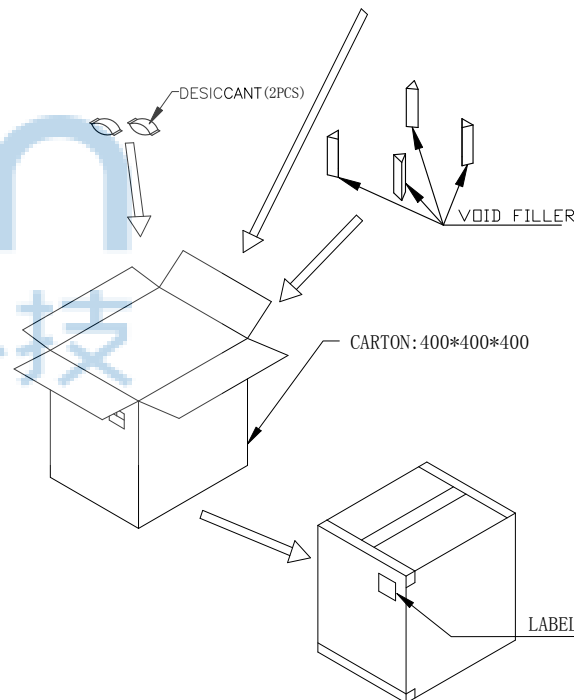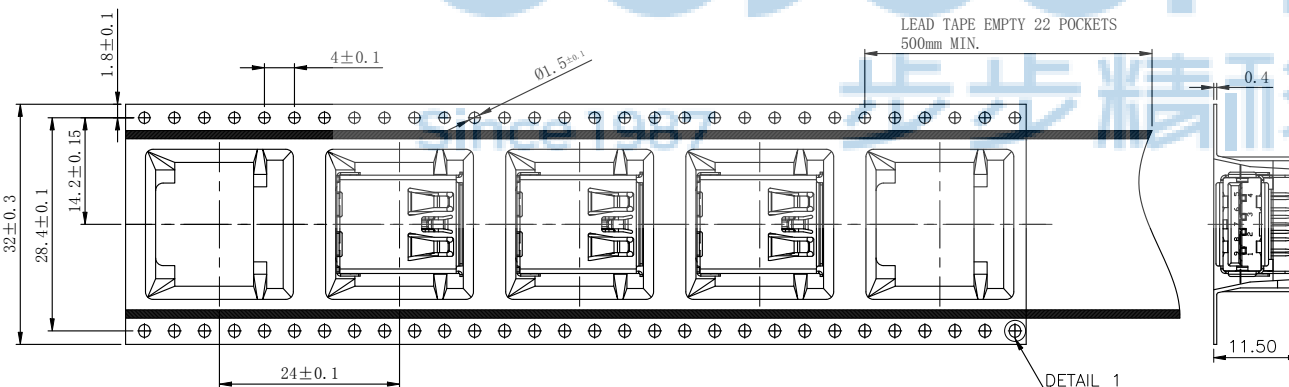

NOTE:

- MATERIAL:
BOX: FIBRE BOARD, CORRUGATED, DOUBLE WALL.
TAPE: POLYSTYRENES, HEAT-RESISTANT TEMPERATURE: 120°C, 透明COLOR.
REEL: POLYSTYRENES, HEAT-RESISTANT TEMPERATURE: 70°C, BLUE COLOR.
BAG: POLYETHYLENE, HEAT-RESISTANT TEMPERATURE: 100°C.
- PEELING STRENGTH: 0.1 ~ 1.3 N (10 ~ 130 GRAMS)
- PEELING SPEED: 300 mm/min.
- EACH BAG SHALL BE INCLUDED DESICCANT.



300	10	3000 PCS	-- KG	7.2KG
PCS/ REEL	REELS/ CARTON	QUANTITY	GROSS WEIGHT	NET WEIGHT

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司 .X: ±0.38 X° :±3° .XX: ±0.25 X° :±2° .XXX: ±0.13 .XX° :±1°		NAME: USB 3.0 A母 90度 DIP 后两脚插 弯脚 卷边 不锈钢外壳 LCP蓝胶 L=16.75 盲带 P.J. NO.: 127-272-090014-K4G SIZE: A4 DRW NO.: FINISH: SEE NOTES MAT' L.: SEE NOTES SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2	
APPD.	JM_Zheng	CHKD.	LYX	DR.	TSP
PDWG.NO:	0886-1				