



REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0		Initial release	/	TSP

备注:


1. 材质:
  - 1-1 塑胶: PBT/LCP
  - 1-2 端子: 黄铜C2680
  - 1-3 外壳: C2680/SPCC
2. 电镀:
  - 端子接触区域: 镀金G/F
  - 端子锡脚: 镀锡80u"min.
  - 端子整个表面: 镀镍40u"min.
  - 铁壳: 镀镍80u"min
3. 电气性能:
  - 3-1 耐电压: 500V 交流电
  - 3-2 接触电阻: 50 毫欧 最大
  - 3-3 绝缘阻抗: 500 兆欧最小
  - 3-4 额定电流: 1.5A
4. 机械性能
  - 4-1 插入力: 3.5kgf MAX
  - 4-2 拨出力: 0.8kgf MIN
5. 环境
  - 温度范围: -20° C TO +65° C

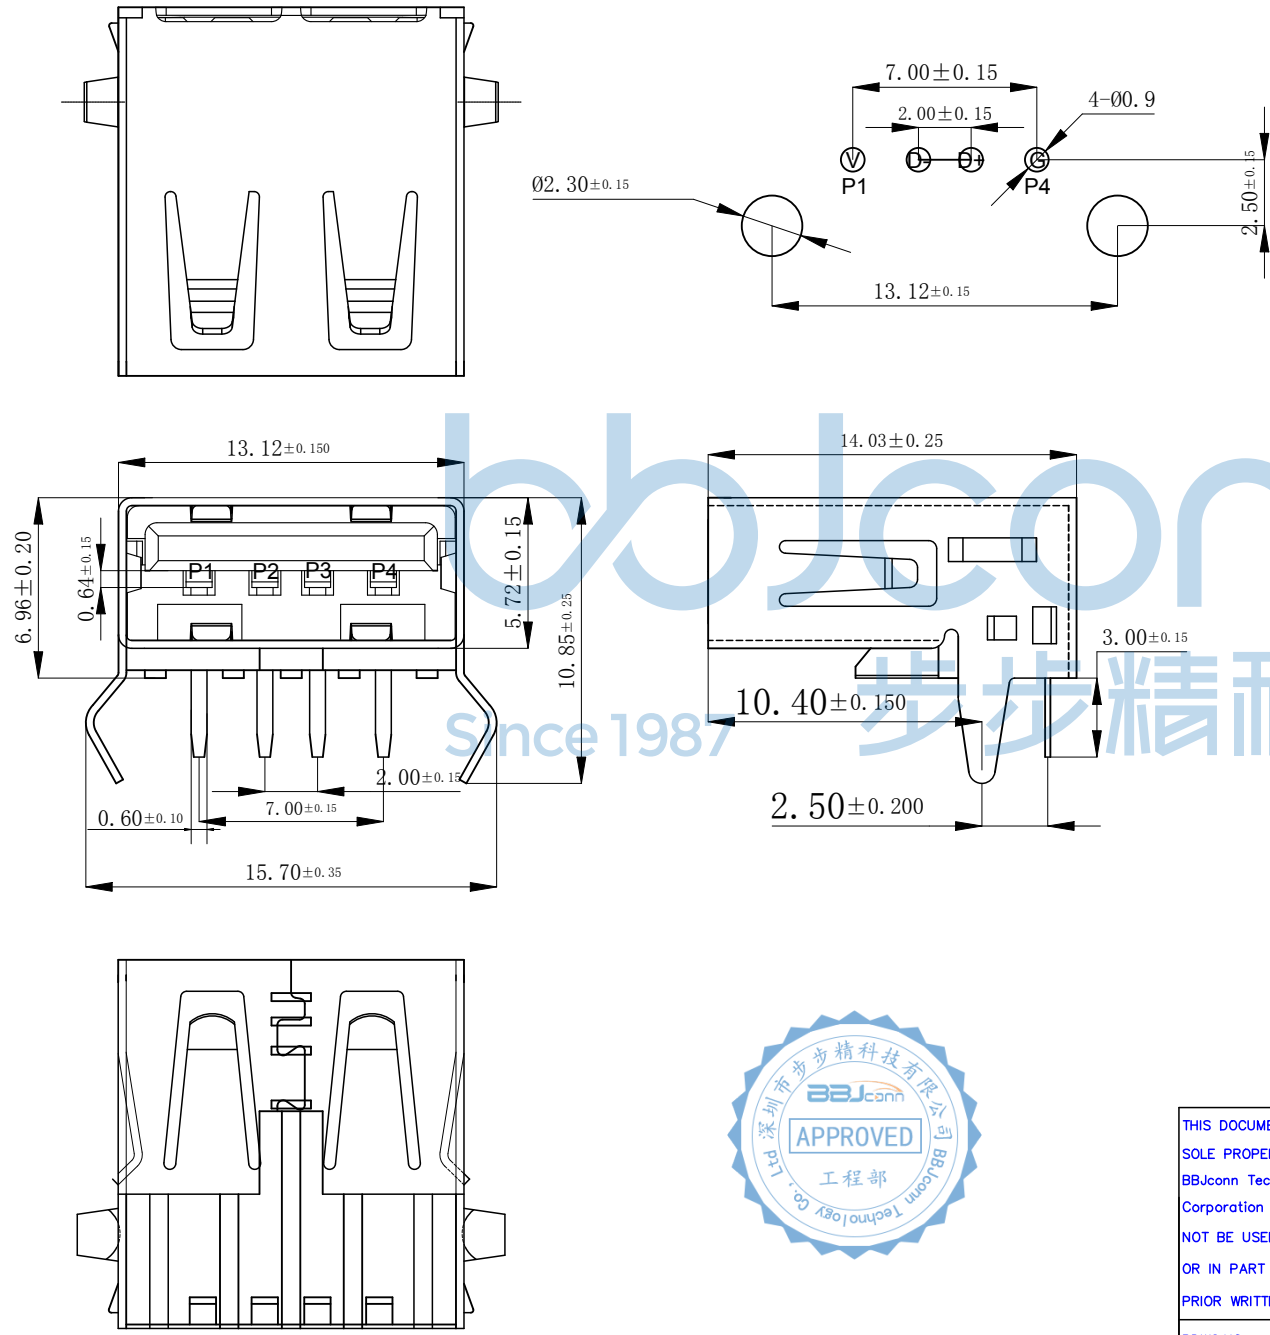

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		<b>深圳市步步精科技有限公司</b>	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X': ±3' X'': ±2' X'': ±1'	
APPD.	JM_Zheng	NAME: USB 2.0 AF 90度 L=14.03 H=6.96 后两脚插弯脚 端子DIP 平口 PBT白胶 铜壳	
CHKD.	LYX	PJ. NO.: 127-272-040009-W7G	
DR.	TSP	SIZE: A4 DRW NO.:	
PDWG.NO: 0383-1		FINISH: SEE NOTES MAT'L.: SEE NOTES	
		SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2	

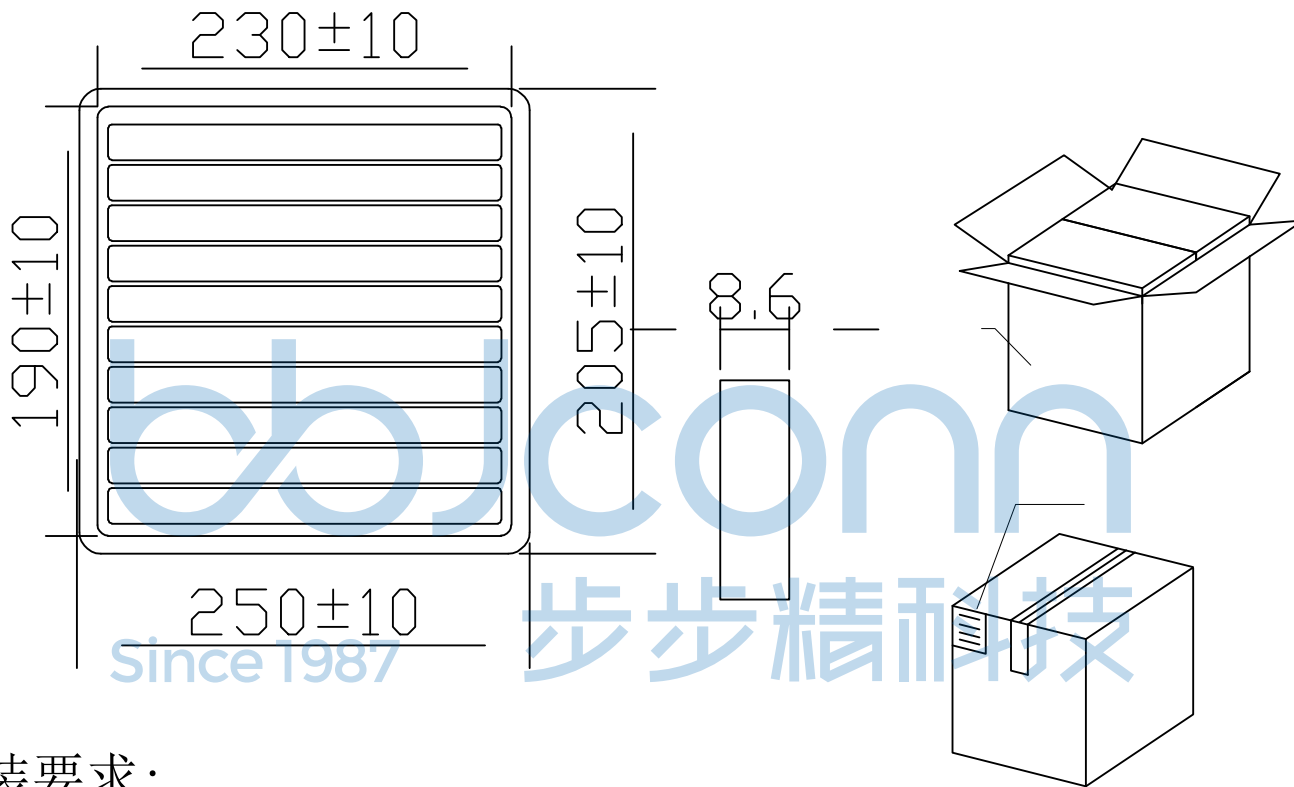

1. 包装要求:
- 1.1 每盒吸塑盒包装100pcs;
  - 1.2 每20盘放一箱, 共计2000PCS;
  - 1.3 纸箱外贴上标签。

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		 <b>深圳市步步精科技有限公司</b>	
PDWG.NO: 0383-1		.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	X': ±3' .X': ±2' .XX': ±1'
APPD.	JM_Zheng	NAME: USB 2.0 AF 90度 L=14.03 H=6.96 后两脚插弯脚 端子DIP 平口 PBT白胶 铜壳	
CHKD.	LYX	PJ. NO.: 127-272-040009-W7G	
DR.	TSP	SIZE: A4 DRW NO.:	
		FINISH: SEE NOTES MAT'L.: SEE NOTES	
		SCALE: N/A	REV.: A0 UNIT: mm PAGE: 2/2