



REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	SGF

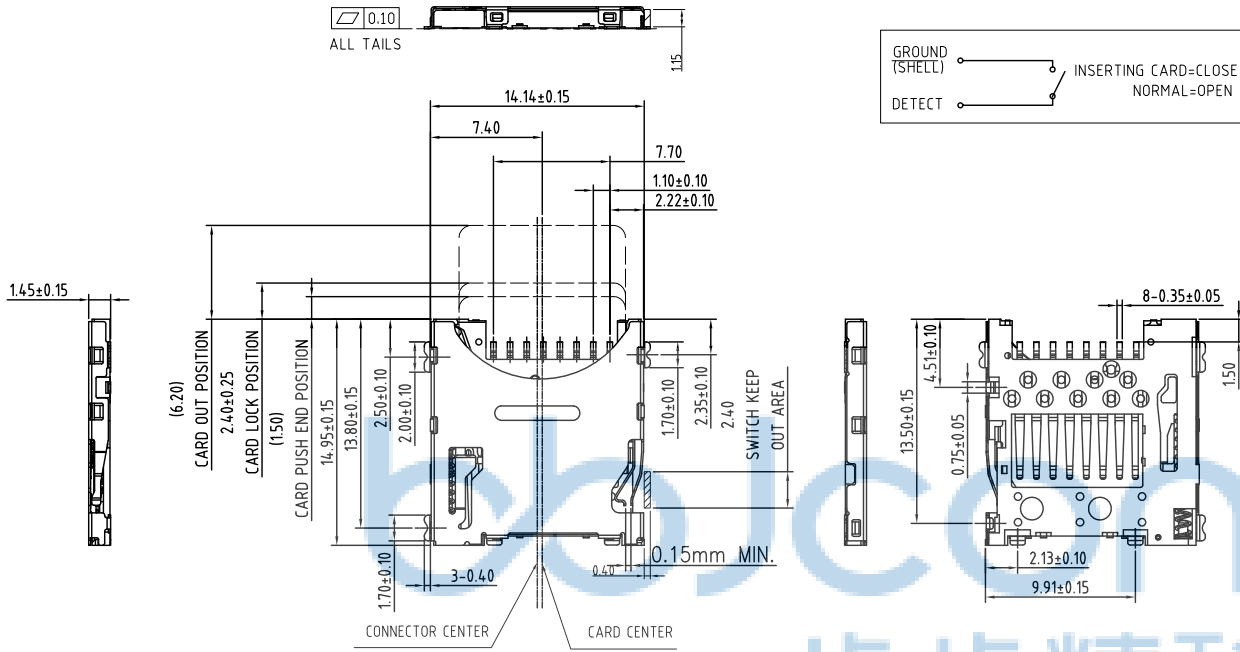

- NOTES:
1. COPLANARTY SPEC. FOR ALL SOLDER TAILS AND SOLDER PADS IS 0.1mm MAX.
 2. ELECTRICAL CHARACTERISTICS:
 - 2-1. CURRENT RATING: 0.5 Amp. MAX.
 - 2-2. VOLTAGE: 100V DC. MAX.
 - 2-3. LOW LEVEL CONTACT RESISTANCE: 100 mOhms MAX. INITIALLY.
 - 2-4. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC MIN. FOR 1 MINUTE.
 - 2-5. INSULATION RESISTANCE: (INITIAL) 1000MOhms MIN.. (FINAL) 100MOhms MIN. BY APPLYING 500V DC ON MATED AND UNMATED CONNECTORS THROUGH MIL-STD-202, METHOD 302.
 3. MECHANICAL CHARACTERISTICS:
 - 3-1. DURABILITY: 5000 CYCLES.
 - 3-2. OPERATING TEMP. RANGE: -25°C TO 85°C. [INCLUDING TERMINAL TEMP. RISE]
 - 3-3. STORAGE TEMP.: -40°C TO 85°C.
 4. Solder ability: 255±5°C. 5±0.5s.

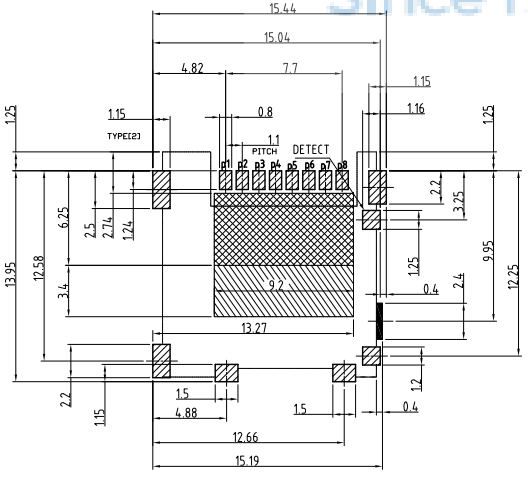

RECOMMENDED PCB PATTERN LAYOUT(TOP VIEW)
TOLERANCE: ±0.05

SOLDER PROHIBITED AREA
 PROHIBITED AREA
 PATTERN PROHIBITED AREA



7	DETECT	1	C5210,30u" Ni UNDERLATED OVERALL G/F PALTED ON CONTACT AREA
6	TERMINAL	1	80u" MATTE TIN PLATED ON SOLDER AREA
5	HOUSING	1	LCP UL94V-0, BLACK
4	SLIDER	1	LCP UL94V-0, BLACK
3	SPRING	1	SWP
2	CAM FOLLOWER	1	SUS304
1	SHELL	1	SUS304,G/F PLARED OVER 30u" Ni ON SOLDER AREA
NO.	PART NAME	Q'TY	DESCRIPTION

TERM 1	DATA 2
TERM 2	CD/DATA 3
TERM 3	CMD
TERM 4	VDD
TERM 5	CLK
TERM 6	VSS
TERM 7	DATA 0
TERM 8	DATA 1

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.

PDWG. NO: 0302-1

DR. SGF

APPD. JM_Zheng

CHKD. LYX

深圳市步步精科技有限公司

NAME: 卡座 TF 外焊自弹 8P 贴片 无柱 H=1.45 SMT


PJ. NO.: 142-121-080001-V8G

SIZE: A4 | DRW NO.:

FINISH: SEE NOTES | MAT'L.: SEE NOTES

SCALE: N/A | REV.: A0 | UNIT: mm | PAGE: 1/2


REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	SGF

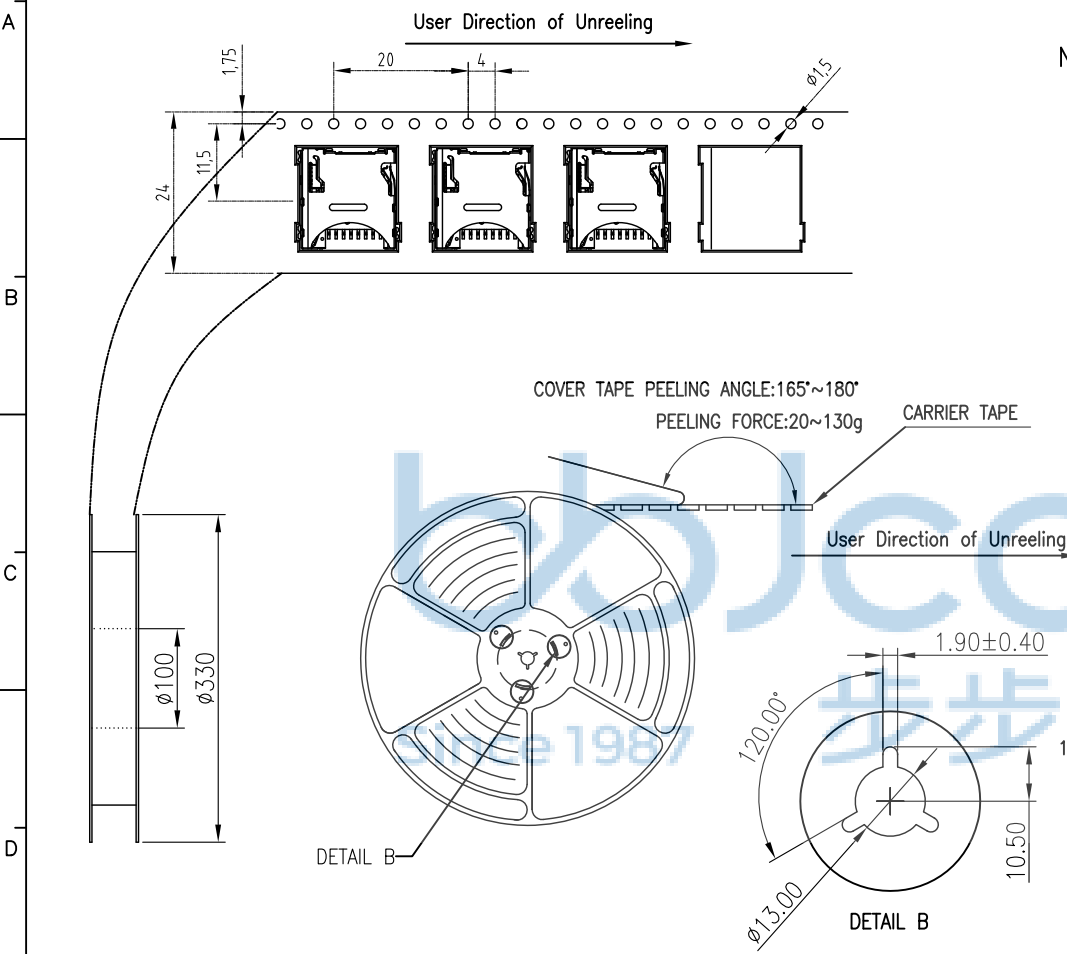

NOTES

1. NUMBER OF CONNECTORS: 1500PCS/REEL
2. LEAD TAPE LENGTH

EMPTY 15PCS MIN	PART 1500PCS	EMPTY 15PCS MIN	COVER TAPE (300mm Min)
LEADER 400mm MIN		COMPONENT SUPPLIER	TRAILER 160mm MIN
3. QUANTITY: 15000PCS/CARTON

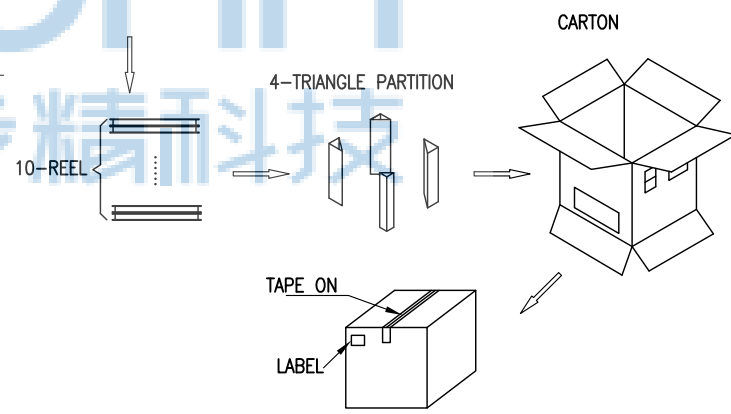

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. CORPORATION AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司 .X: ±0.38 .XX: ±0.25 .XXX: ±0.13 X': ±3' X'': ±2' XX': ±1'	
APPD.	JM_Zheng	NAME: 卡座 TF 外焊自弹 8P 贴片 无柱 H=1.45 SMT	
CHKD.	LYX	PJ. NO.: 142-121-080001-V8G	
DR.	SGF	SIZE: A4 DRW NO.:	
PDWG. NO:	0302-1	FINISH: SEE NOTES MAT'L.: SEE NOTES	
		SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2	