
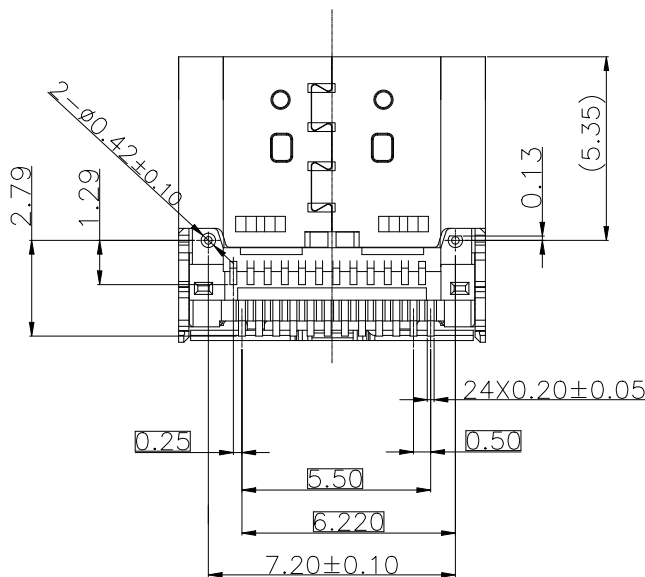
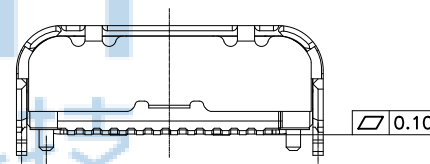
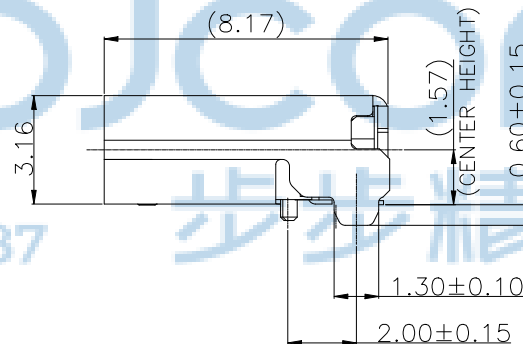
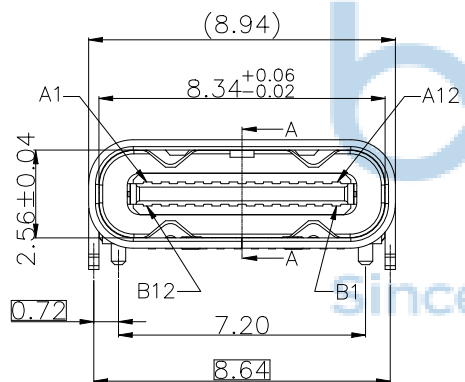



REV	ECN NO	CONTENT	DATE	ENGINEER
A0		INITIAL RELEASE	/	SGF

NOTE:

1. SPECIFICATION:

- 1.1 Rated current: 5.0 A
- 1.2 Voltage rating: 5V AC
- 1.3 Contact Resistance: 40 mΩ Max.
- 1.4 Insulation Resistance: 100MΩ Min.
- 1.5 Withstanding voltage: 100 VAC/minute
- 1.6 Mating force: 5~20N
- 1.7 Unmating force: 8~20N
- 1.8 Durability Cycle: 10,000 cycle
- 1.9 Operating temperature: -40°~+85°

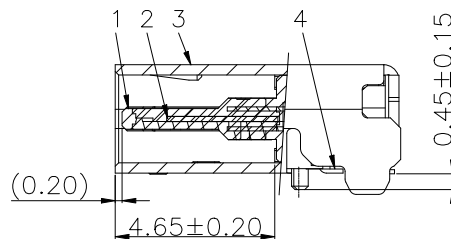

PIN ASSIGNMENT:

A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12
GND	TX1+	TX1-	Vbus	CC1	D+	D-	SBU1	Vbus	RX2-	RX2+	GND
B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1
GND	RX1+	RX1-	Vbus	SBU2	D-	D+	CC2	Vbus	TX2-	TX2+	GND

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.

PDWG NO: 0470-1

深圳市步步精科技有限公司

.X: ±0.38 X': ±3"
.XX: ±0.25 X'': ±2"
.XXX: ±0.13 .XX': ±1"

APPD JM_Zheng

CHKD LYX

DR

NAME: U4 40G速率 TYPE-C 24P 母座 板上两脚插

双排SMT 带柱 L=8.17 CH=1.57 镀金GF 编带

PJ NO: 126-221-240019-U4G

SIZE: A4

DRW NO:

FINISH: SEE NOTES


SCALE: N/A

MAT'L: SEE NOTES

UNIT: mm

REV: A0

PAGE: 1/3

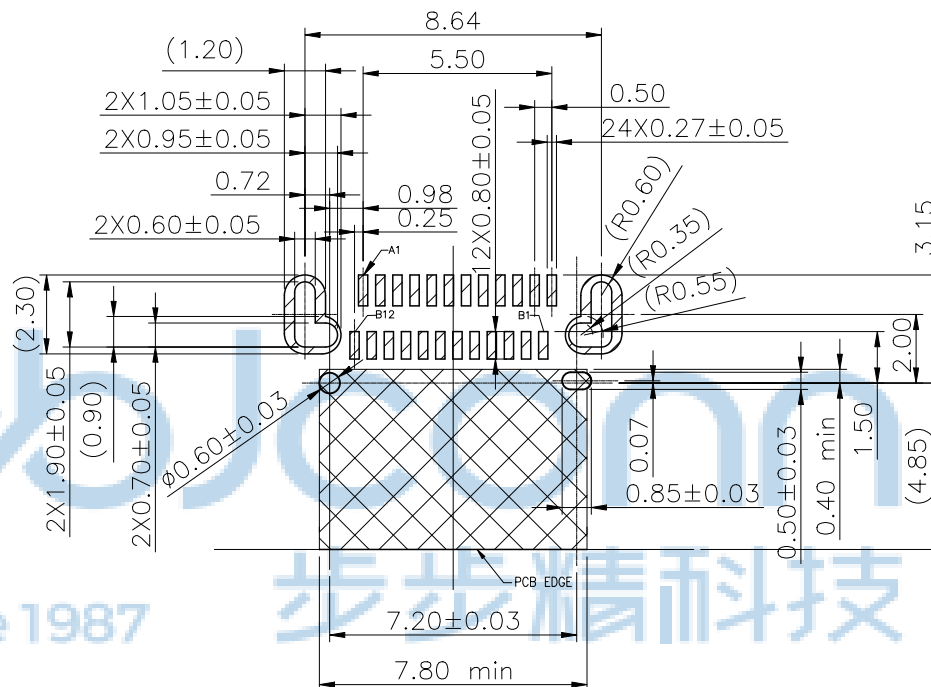

4	TERMINAL	24	C18140	MATING SIDE:SEE PART NO; SOLDER TAIL:Gold FLASH, 50u" NICKEL OVERALL.	T=0.12
3	SHELL	1	SUS304	NICKEL PLATING	T=0.30
2	MID PLATE	1	SUS301	NICKEL PLATING	T=0.15
1	MAIN HOUSING	1	PA9T HF 30%玻纤, UL94 V-0, 黑色		BLACK UL94V-0
ITEM	DESCRIPTION	Q'TY	MATERIAL	FINISH	REMARK
BILL OF MATERIAL					

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.

PDWG NO: 0470-1

深圳市步步精科技有限公司

.X: ±0.38 X': ±3"
.XX: ±0.25 X": ±2"
.XXX: ±0.13 .XX': ±1"

APPD JM_Zheng

CHKD LYX

DR

NAME: U4 40G速率 TYPE-C 24P 母座 板上两脚插
双排SMT 带柱 L=8.17 CH=1.57 镀金GF 编带


PJ NO: 126-221-240019-U4G

SIZE: A4 DRW NO:


FINISH: SEE NOTES MAT'L: SEE NOTES

SCALE: N/A REV: A0 UNIT: mm PAGE: 2/3


REV	ECN NO	CONTENT	DATE	ENGINEER
A0		INITIAL RELEASE	/	SGF

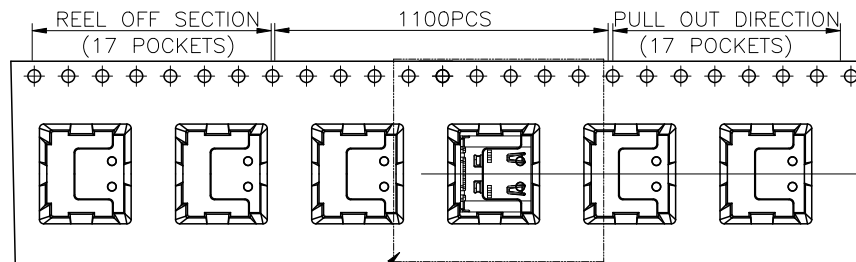

SEE DETAIL X

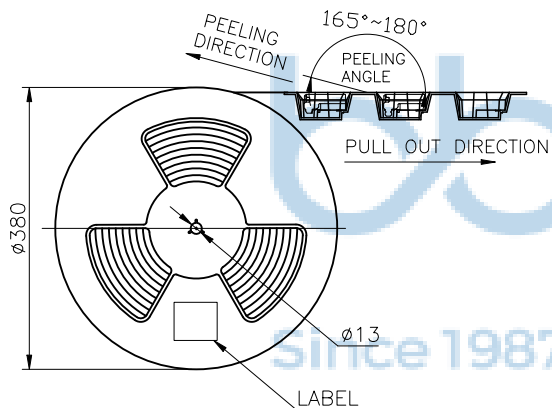

W+0.5

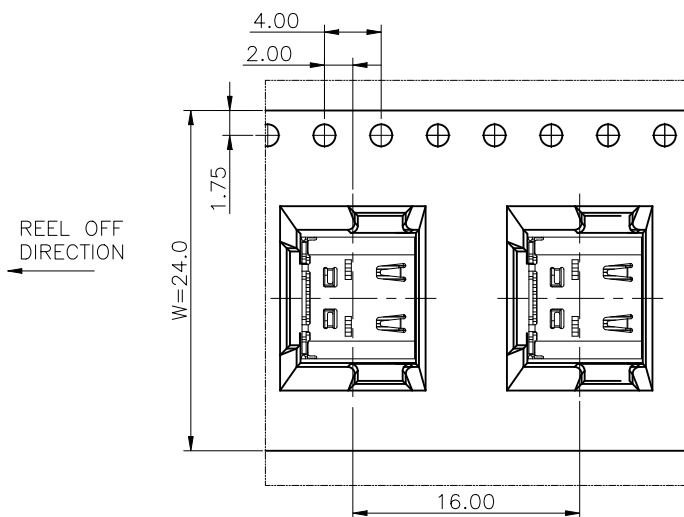

PAPER BOARD

REEL AND TAPE

REEL AND TAPE

PAPER BOARD

FOLDER
PAPER BOARD

CARTON

	REEL	CARTON
CONNECTOR (PCS)	1100	11000

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.

PDWG NO: 0470-1

深圳市步步精科技有限公司

.X: ±0.38 X': ±3"
.XX: ±0.25 X'': ±2"
.XXX: ±0.13 .XX': ±1"

APPD JM_Zheng

CHKD LYX

DR

SGF

NAME: U4 40G速率 TYPE-C 24P 母座 板上两脚插
双排SMT 带柱 L=8.17 CH=1.57 镀金GF 编带

PJ NO: 126-221-240019-U4G

SIZE: A4 DRW NO:

FINISH: SEE NOTES

SCALE: N/A

MAT'L: SEE NOTES

UNIT: mm

PAGE: 3/3

