

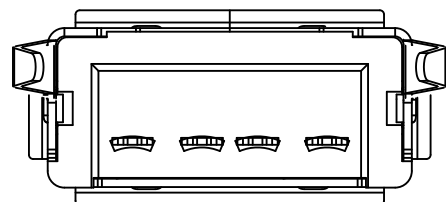
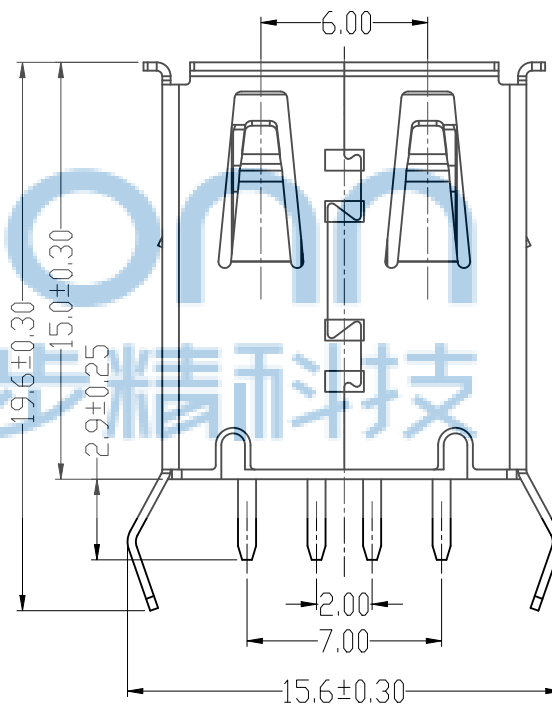
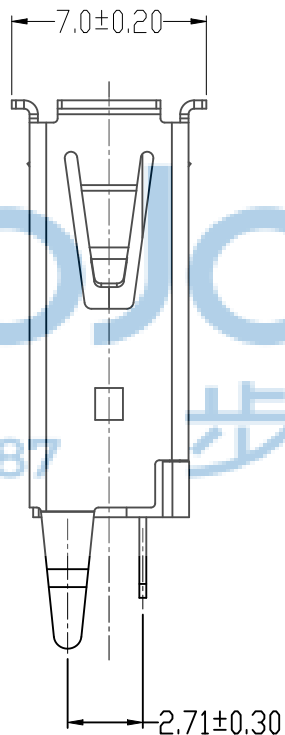


RECOMMEND P.C.B. LAYOUT

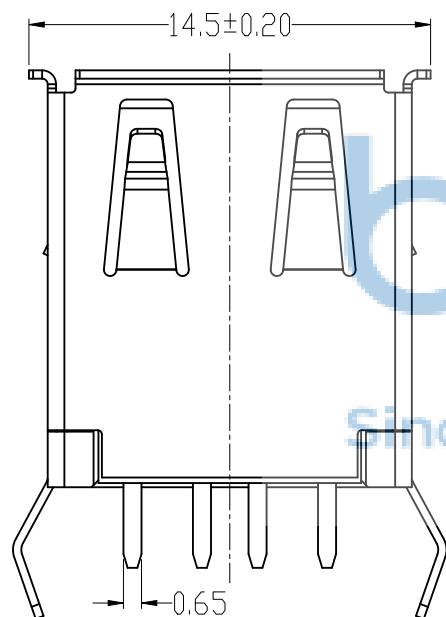

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0				

NOTES:

1. MATERIAL SPECIFICATION:

- 1) HOUSING MATERIAL:BLACK PBT ROHS.
- 2) AFTER PLUG:BLACK PBT ROHS.
- 3) SHELL MATERIAL:SPCC/C2680 T:0.30mm
PLATING:NICKE.
- 4) TERMINAL:C5191 T:0.25mm
PLATING:SEMI GOLD TIN G/F.

2. ELECTRICAL CHARACTERISTIC:

- 1) INSULATION RESISTANCE: 1000MΩ MIN;
- 2) CONTACT RESISTANCE: 30mΩ MAX;
- 3) WITHSTANDING VOLTAGE: 500V AC;

3. MECHANICAL CHARACTERISTICS:

- 1) INSERTION FORCE:3.57Kgf Max;
- 2) EXTRACTION FORCE:1.02Kgf Min;



THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.

PDWG.NO: 0036-1



深圳市步步精科技有限公司

.X: ±0.38
.XX: ±0.25
.XXX: ±0.13

X*: ±3"
.X*: ±2"
.XX*: ±1"

NAME: USB 2.0 AF 180度 长体 H=15.0 两脚插 弯脚
端子DIP 卷边 PBT黑胶 铁壳 (819029-002)

APPD. JM_Zheng

CHKD. LYX



DR. TSP

PJ. NO.: UB.01.11-11-4003


SIZE: A4 DRW NO.:

FINISH: SEE NOTES MAT'L.: SEE NOTES

SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2

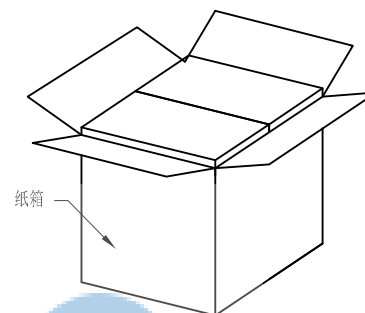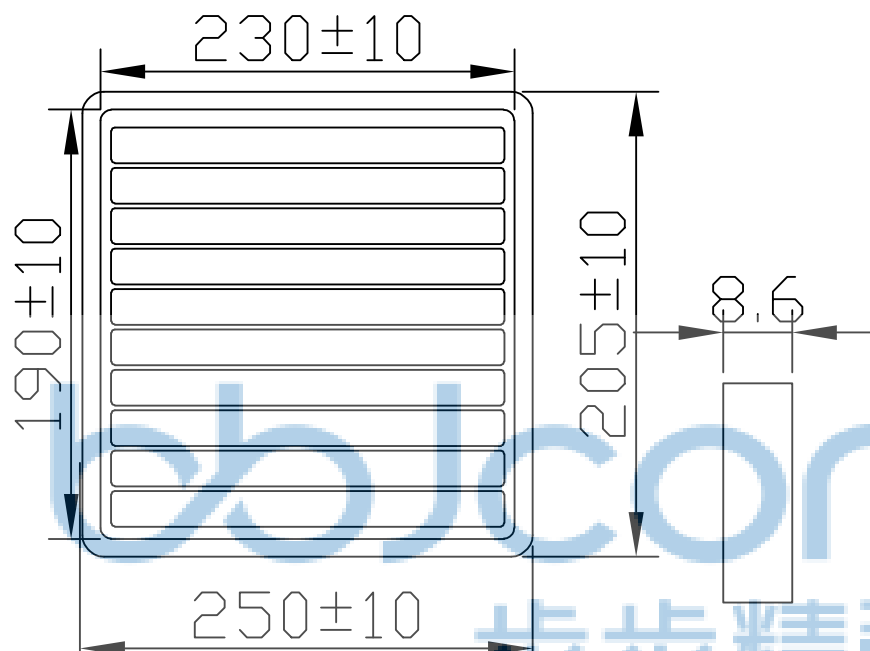

成品标签



纸箱规格: 350*210*290



1. 包装要求:

- 1.1 每盒吸塑盒包装100pcs;
- 1.2 每20盘放一箱, 共计2000PCS;
- 1.3 纸箱外贴上标签。

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. PDWG.NO: 0036-1		 深圳市步步精科技有限公司		NAME: USB 2.0 AF 180度 长体 H=15.0 两脚插 弯脚 端子DIP 卷边 PBT黑胶 铁壳 (819029-002)	
APPD.		JM_Zheng		PJ. NO.: UB.01.11-11-4003	
CHKD.		LYX		SIZE: A4 DRW NO.:	
DR.		TSP		FINISH: SEE NOTES MAT'L.: SEE NOTES	
				SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2	