

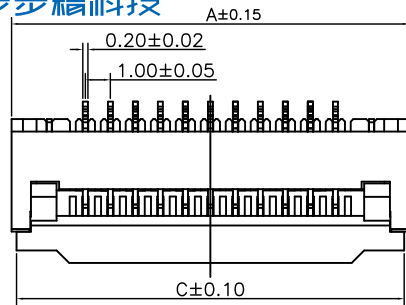


RECOMMENDED METAL MASK PATTERN
(THICKNESS 0.10MM)

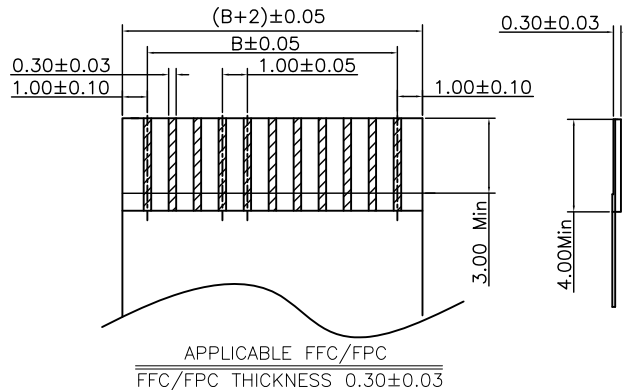


Note:

- Material
 - Housing: LCP UL94-V0 Color:Nature.
 - Actuator: LCP UL94-V0 Color:Black.
 - Contact: Phosphor Bronze.
 - LEG: Brass.
- Plating
 - Contact: Matte Tin Or Gold Plating Nickel Overall.
 - LEG: Matte Tin Plating Over Nickel.
- Rating:
 - Operating Voltage: 50V AC/DC.
 - Current Rating: 0.5A AC/DC.
 - Operating Temperature: -55°C~+85°C.


CKT	Dimension			
	A	B	C	D
04	8.90	3.00	8.50	5.10
05	9.90	4.00	9.50	6.10
06	10.90	5.00	10.50	7.10
07	11.90	6.00	11.50	8.10
08	12.90	7.00	12.50	9.10
09	13.90	8.00	13.50	10.10
10	14.90	9.00	14.50	11.10
11	15.90	10.00	15.50	12.10
12	16.90	11.00	16.50	13.10
13	17.90	12.00	17.50	14.10
14	18.90	13.00	18.50	15.10
15	19.90	14.00	19.50	16.10
16	20.90	15.00	20.50	17.10
17	21.90	16.00	21.50	18.10
18	22.90	17.00	22.50	19.10
19	23.90	18.00	23.50	20.10
20	24.90	19.00	24.50	21.10
21	25.90	20.00	25.50	22.10
22	26.90	21.00	26.50	23.10
23	27.90	22.00	27.50	24.10
24	28.90	23.00	28.50	25.10
25	29.90	24.00	29.50	26.10
26	30.90	25.00	30.50	27.10
27	31.90	26.00	31.50	28.10
28	32.90	27.00	32.50	29.10
29	33.90	28.00	33.50	30.10
30	34.90	29.00	34.50	31.10
31	35.90	30.00	35.50	32.10
32	36.90	31.00	36.50	33.10



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司 .X: ±0.38 .X': ±3' .XX: ±0.25 .X': ±2' .XXX: ±0.13 .XX': ±1'		NAME: FPC 1.0-9P 翻盖下接 H=2.0 (FPC1021)	
APPD.	JM_Zheng	PJ. NO.: PC.04.04-32-D001		SIZE: A4 DRW NO.:	
CHKD.	LYX	FINISH: SEE NOTES		MAT'L.: SEE NOTES	
PDWG.NO:	0428-1	DR.	SGF	SCALE: N/A	REV.: A0 UNIT: mm PAGE: 1/2

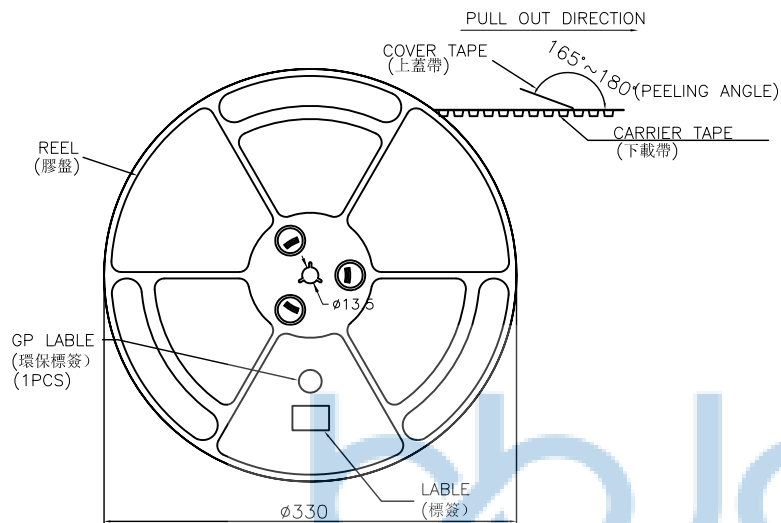


SCALE 1:4

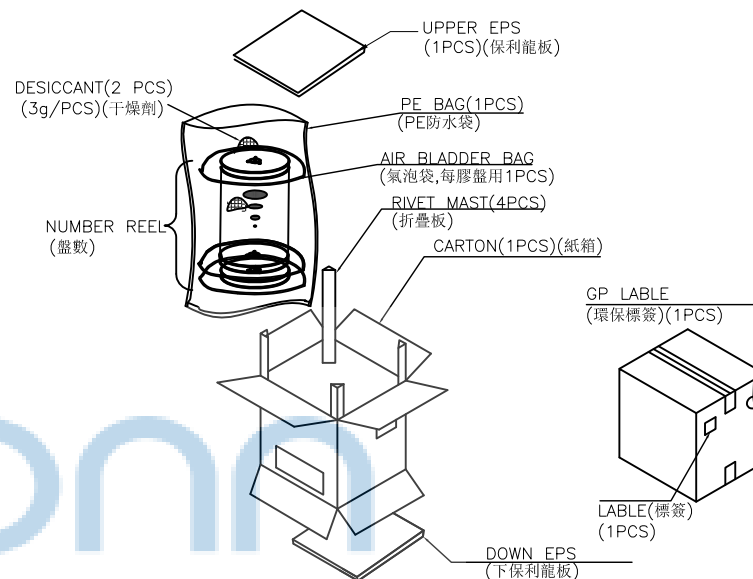


NOTES :

1. CARTON SPEC. : 350 * 350 * 340mm (OUT DIM) , PAPER THICKNESS = 5mm
2. UPPER and DOWN EPS: 350*350mm THICKNESS = 8mm.
3. THE COVER TAPE PEELING FORCE: 30~100g.
4. PER REEL CASED ONE AIR BLADDER BAG.
5. CARRIER TAPE COLOR: BLACK.

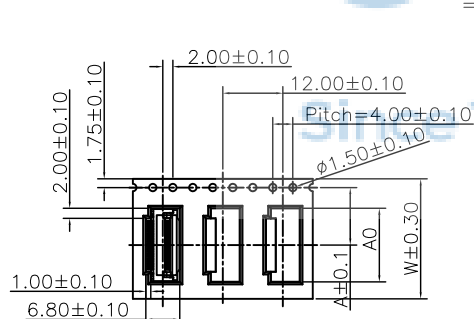

PULL OUT DIRECTION

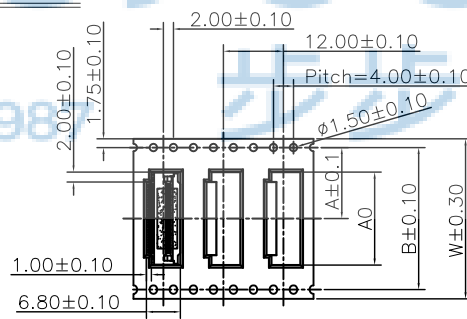

PULL OUT DIRECTION



PIN NO.	C	W	A	B	A0	PCS/Reel	Reel/Carton	Sum(PCS)
04PIN	20.5	16	7.5			2,000	15	30,000
05PIN~12PIN	28.5	24	11.5	—	9.20+ (n-4)*1.0	2,000	10	20,000
13PIN~16PIN	36.5	32	14.2	28.4	(n=pin no)	2,000	8	16,000
17PIN~27PIN	48.5	44	20.2	40.4		2,000	6	12,000
28PIN~30PIN	60.5	56	26.2	52.4		2,000	5	10,000



THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co., Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG, NO: 0428-1

深圳市步步精科技有限公司

NAME: FPC 1.0-9P 翻盖下接 H=2.0 (FPC1021)

PJ. NO.: PC.04.04-32-D001

SIZE: A4 DRW NO.:

FINISH: SEE NOTES MAT'L.: SEE NOTES

SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2

APPD. JM_Zheng

CHKD. LYX

DR. SGF