

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	TSP






备注:

- 塑料件表面应光滑整洁, 无飞边、气泡、收缩、破裂等缺陷, 铆点无脱落、开花、大小不一等缺陷;
- 端子表面应清洁, 无锈蚀、变形、发黄、电镀不良等缺陷; 盖板应组装到位、无松动;
- ▼重要尺寸首件/自主/巡回等均需确认;
- 机械性能:
 - 动作力: $250 \pm 50\text{gf}$ / $180 \pm 50\text{gf}$ / $100 \pm 50\text{gf}$;
 - 寿命: 覆银铜弹片 50,000 CYCLES Min.; 不锈钢弹片 100,000 CYCLES Min.;


电气性能	
额定规格	DC12V/50mA
接触电阻	$\leq 100\text{m}\Omega$
绝缘电阻	$\geq 100\text{M}\Omega$
耐电压	AC250V/min

行程 (TRAVEL)	
260gf	0.25mm
160gf	0.20mm
100gf	

A (直径)	H (高度)
	4.3
	4.5
ø3.50	4.7
	4.8
	5.0
ø3.45	5.5
ø3.35	6.0
ø3.20	6.5
ø3.10	7.0
	7.5
	8.0
	8.5
	9.0
	9.5
	10.0
	10.5
	11.0
	11.5
	12.0
	12.5
	13.0
	13.5
	14.0
	14.5
	15.0
	15.5
ø3.00	16.0
	16.5
	17.0
	17.5
	18.0
	18.5
	19.0
	19.5
	20.0
	21.0
	22.0
	23.0
	24.0
	25.0
	26.0
	27.0
	28.0
	29.0

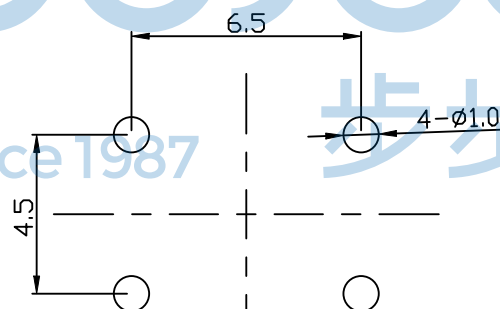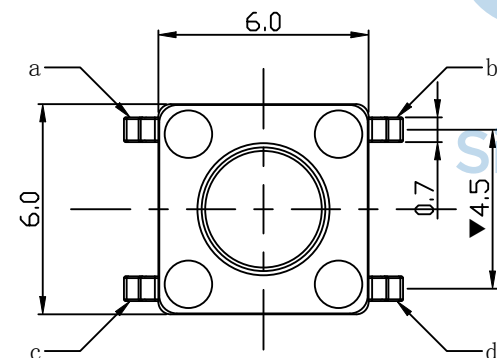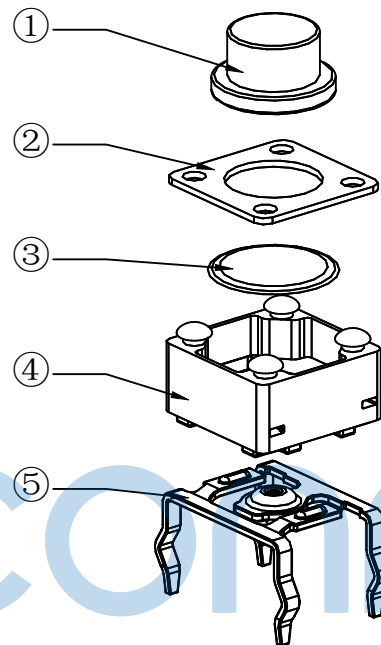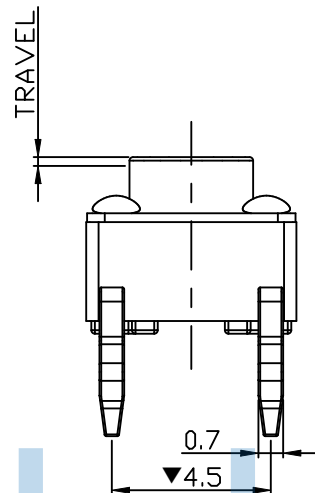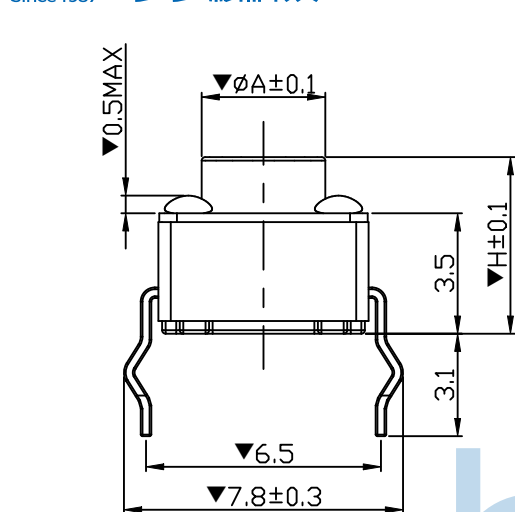

线路板图
PCB Diagram




序号	产品名称	材料规格	表面处理/颜色	数量
	按钮	PPA		1
	盖板	铁/铜	镀铜锡	1
	弹片	覆银铜/不锈钢	镀银/无	1
	底座	PPA	黑色	1
	嵌件	高精铜	镀铜锡	1




THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
APPD.	JM_Zheng	NAME:	轻触开关 6x6x5.0 弯脚直插 不锈钢弹片 260gf 袋装
CHKD.	LYX	PJ. NO.:	TS.01.13-21-3Z-01
DR.	TSP	SIZE:	A4 DRW NO.:
PDWG.NO:	0472-1	FINISH:	SEE NOTES
		MAT'L.:	SEE NOTES
		SCALE:	N/A
		REV.:	A0
		UNIT:	mm
		PAGE:	1/2

PE袋规格: 260*185

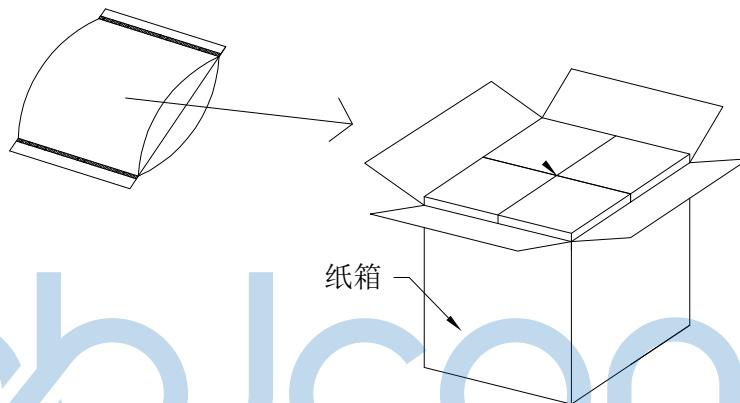

成品标签



1. 包装要求:

- 1.1 每个PE袋包装1000pcs;
- 1.2 每1袋放一小纸盒;
- 1.3 每20个小纸盒放一个纸箱, 共计20000pcs;
- 1.4 纸箱外贴上标签



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.				深圳市步步精科技有限公司			
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X*: ±3" .X*: ±2" .XX*: ±1"		NAME: 轻触开关 6x6x5.0 弯脚直插 不锈钢弹片 260gf 袋装			
APPD.		JM_Zheng		PJ. NO.: TS.01.13-21-3Z-01			
CHKD.		LYX		SIZE: A4 DRW NO.:			
PDWG.NO: 0472-1		DR.		TSP		FINISH: SEE NOTES MAT'L.: SEE NOTES	
				SCALE: N/A		REV.: A0	UNIT: mm
						PAGE: 2/2	