

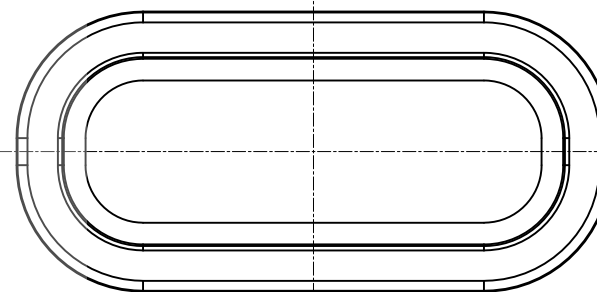


SECTION A-A

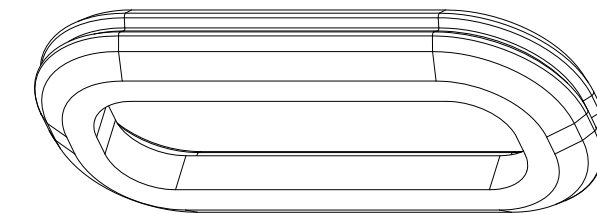

Pin	Signal Name	Mating Sequence	Pin	Signal Name	Mating Sequence
A1	GND	First	B12	GND	First
A2	SSTXp1	Second	B11	SSRXp1	Second
A3	SSTXn1	Second	B10	SSRXn1	Second
A4	V _{RES}	First	B9	V _{RES}	First
A5	CC1	Second	B8	SBU2	Second
A6	Dp1	Second	B7	Dn2	Second
A7	Dn1	Second	B6	Dp2	Second
A8	SBU1	Second	B5	CC2	Second
A9	V _{RES}	First	B4	V _{RES}	First
A10	SSRXn2	Second	B3	SSTXn2	Second
A11	SSRXp2	Second	B2	SSTXp2	Second
A12	GND	First	B1	GND	First
SHELL	GND		SHELL	GND	

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. CORPORATION AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. PDWG.NO: 0366-2	 深圳市步步精科技有限公司		NAME: TYPE-C 24P 母座 L=10.65 CH=1.75 板上四脚插 带柱 端子SMT+DIP 防水IPX7		
	.X: ± 0.38 .XX: ± 0.25 .XXX: ± 0.13	X*: $\pm 3^{\circ}$ X*: $\pm 2^{\circ}$ XX*: $\pm 1^{\circ}$		P.J. NO.: 126-223-240003-N5G	
	APPD.	JM_Zheng		SIZE: A4 DRW NO.:	
	CHKD.	TSP		FINISH: SEE NOTES MAT'L.: SEE NOTES	
	DR.	LYX		SCALE: N/A REV.: A3 UNIT: mm PAGE: 1/1	

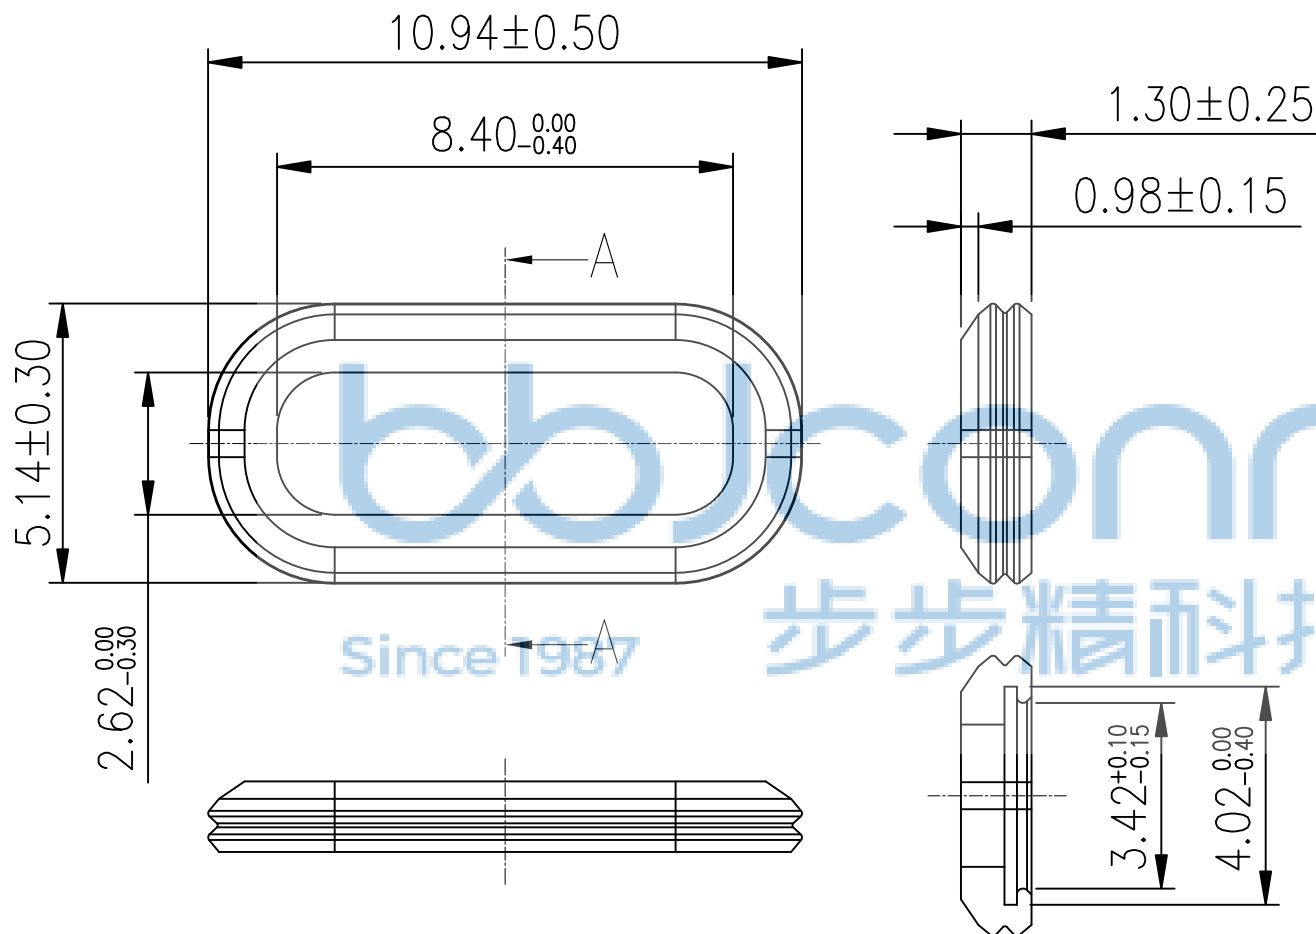



- 备注:
1. 材质硅橡胶/SILICONE RUBBER
 2. 颜色: 黑色
 3. 材料符合RoHS和无卤要求

SECTION A-A



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ± 0.38	X': $\pm 3'$	NAME: TYPE-C 24P 母座 L=10.65 CH=1.75 板上四脚插 带柱 端子SMT+DIP 防水IPX7	
.XX: ± 0.25	.X': $\pm 2'$	PJ. NO.: 126-223-240003-N5G	
.XXX: ± 0.13	.XX': $\pm 1'$	SIZE: A4	DRW NO.:
APPD. JM_Zheng	CHKD. TSP	FINISH: SEE NOTES	MAT'L.: SEE NOTES
PDWG.NO: 0366-2	DR. LYX	SCALE: N/A	REV.: A3 UNIT: mm PAGE: 1/1

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0				

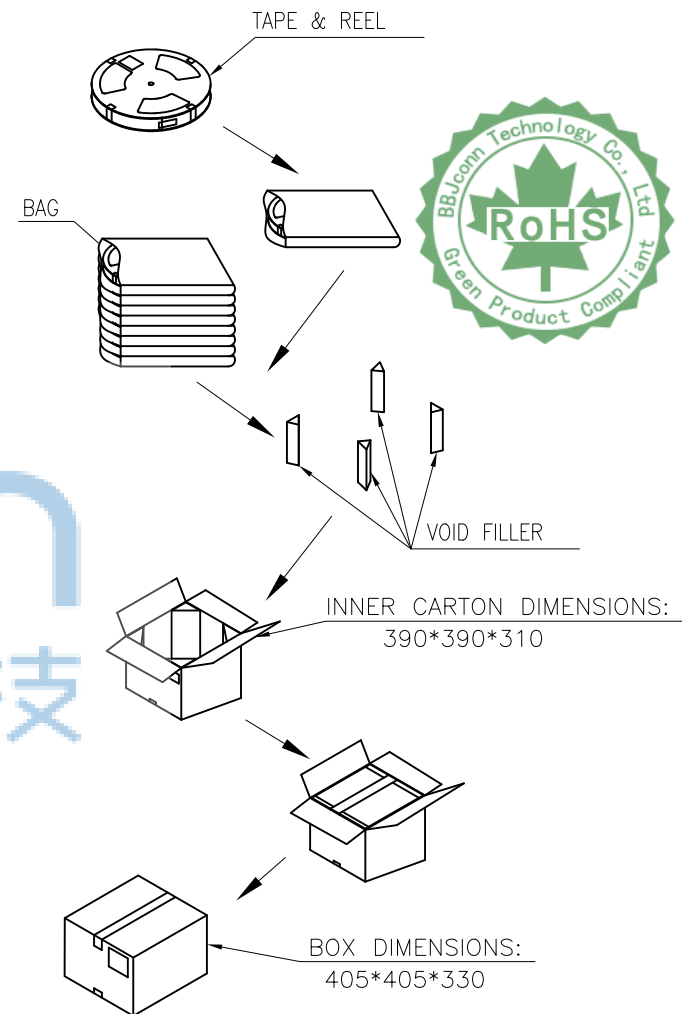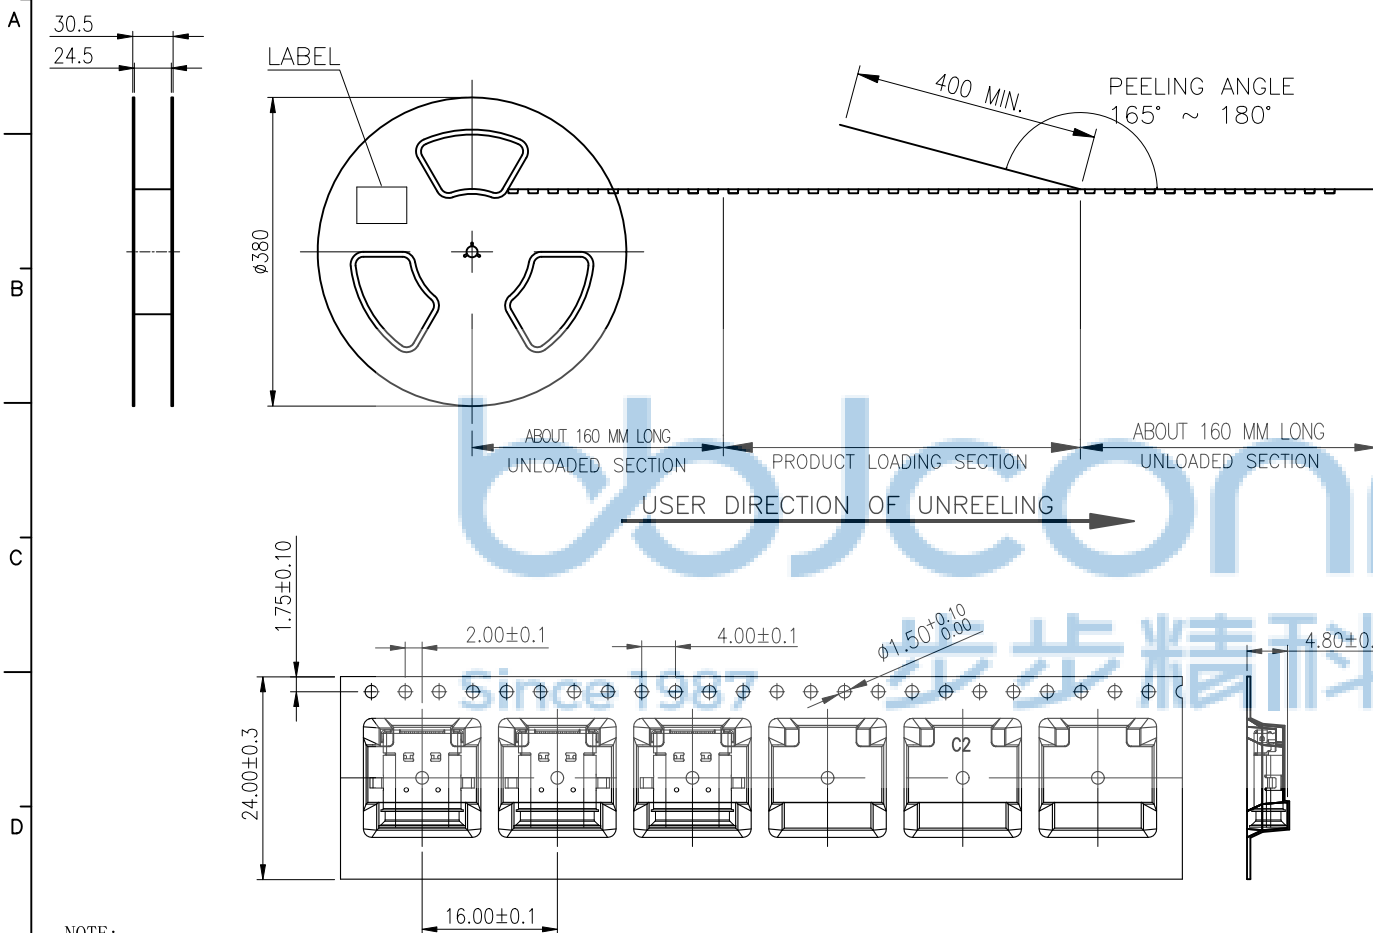

NOTE:

- MATERIAL:
BOX: FIBREBOARD, CORRUGATED, DOUBLE WALL.
TAPE: POLYSTYRENES, HEAT-RESISTANT TEMPERATURE: 120° C, BLACK COLOR.
REEL: POLYSTYRENES, HEAT-RESISTANT TEMPERATURE: 70° C, BLUE COLOR.
BAG: POLYETHYLENE, HEAT-RESISTANT TEMPERATURE: 100° C.
- PEELING STRENGTH: 0.1 ~ 1.3 N (10 ~ 130 GRAMS)
- PEELING SPEED: 300 mm/min.
- EACH BAG SHALL BE INCLUDED DESICCANT.



1000	10	10000 PCS	-- KG	-- KG
PCS/ REEL	REELS/ CARTON	QUANTITY	GROSS WEIGHT	NET WEIGHT

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	X': ±3' .X': ±2' .XX': ±1'	NAME: TYPE-C 24P 母座 L=10.65 CH=1.75 板上四脚插 带柱 端子SMT+DIP 防水IPX7	
APPD. JM_Zheng	CHKD. TSP	PJ. NO.: 126-223-240003-N5G	SIZE: A4 DRW NO.:
PDWG.NO: 0366-2	DR. LYX	FINISH: SEE NOTES	MAT'L: SEE NOTES
		SCALE: N/A	REV.: A3 UNIT: mm PAGE: 1/1