






REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	GZY

NOTES:

- 1.1. ELECTRICAL CHARACTERISTICS
- 1.2. LOW LEVEL CONTACT RESISTANCE:
40m ohm MAX FOR ALL CONTACT
50m ohm MAX AFTER ENMRINMENT TEST
- 1.3. DIELECTRIC WITHSTANDING VOLTAGE
100 VAC FOR 1 MINUTE SEA LEVEL
- 1.4. INSULATION RESISTANCE:100meg ohm MIN
- 1.4.CURRENT RATING: VUBS&GND are both 3A;
The other pins are 0.25A.
- 2.0. MECHANICAL CHARACTERISTICS:
- 2.1. LNSERTION FORCE : 5N~20N
- 2.2.UNMATING FORCE: 8N~20N
After 1001-10,000 tests 6N MIN. 20 N MAX
- 2.3. DURABILTY :10,000 CYCLES.
- 3.0. OPERATING TEMPERATURE:-55℃ TO +85℃
- 4.0. SALT SPRAY:24H

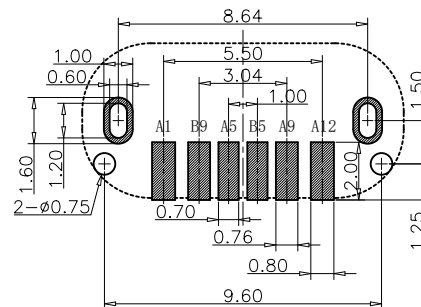

RECOMMEND P.C.B LAYOUT(COMPONENT SIDE)
TOLERANCE FOR PCB LAYOUT IS ±0.05

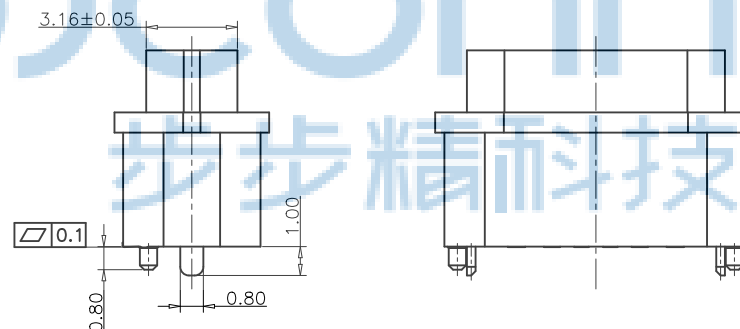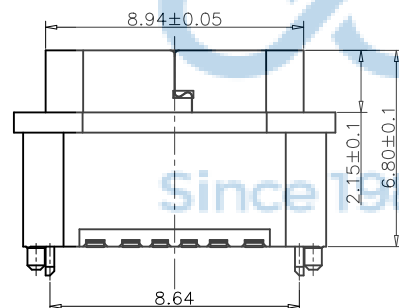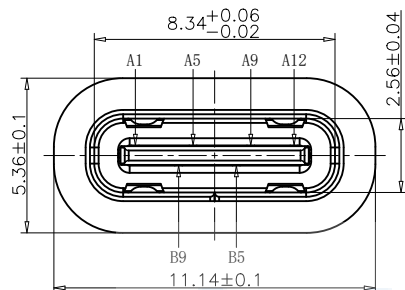

防水圈图示

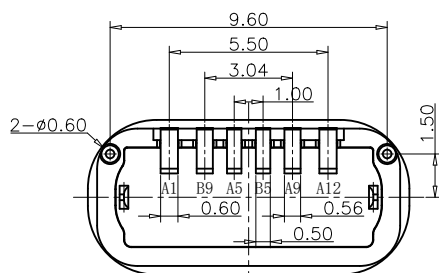
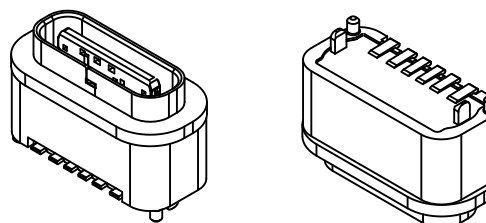


TABLE:




NO	PART	Q'TY	Material
1	SHELL	1	STAINLESS STEEL,NI PLATED
2	CONTACT	6	COPPER STEEL,TIN/Au/NI PLATED
3	1MD HOUSING	1	HIGH TEMPERATURE RESISTANT PLASTIC BLACK UL94 V-0
4	2MD HOUSING	1	HIGH TEMPERATURE RESISTANT PLASTIC BLACK UL94 V-0

USB TYPE C PIN ASSIGNMENTS


PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
A1	GND	B9	VBUS
A5	CC1	B5	CC2
A9	VBUS		
A12	GND		

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG,NO: 0395-1

深圳市步步精科技有限公司	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	X*: ±3* .X*: ±2* .XX*: ±1*
NAME: TYPE-C 6P 防水母座 直立式 两脚DIP 端子SMT H=6.8 带中夹片 不锈钢外壳 带柱 IPX7 带防水圈 编带	
APPD. JM_Zheng	PJ. NO.: 126-225-060001-J2G
CHKD. LYX	SIZE: A4 DRW NO.:
DR. GZY	FINISH: SEE NOTES MAT'L: SEE NOTES
	SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2

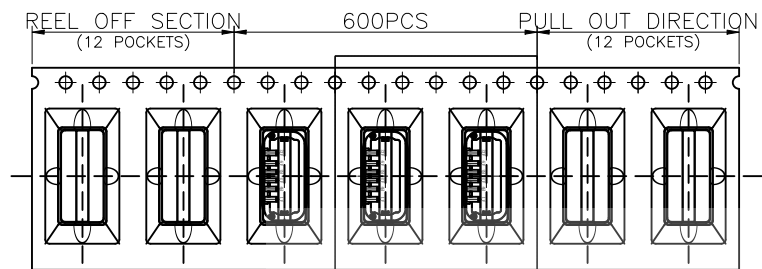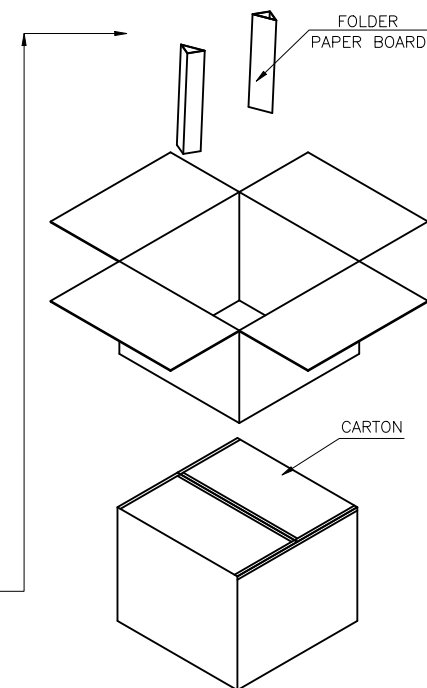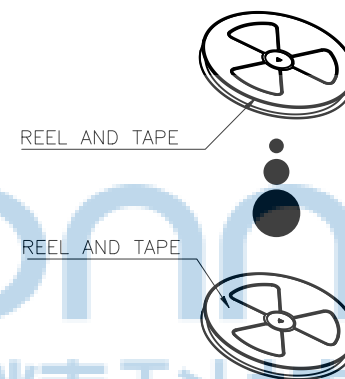


SEE DETAIL X—

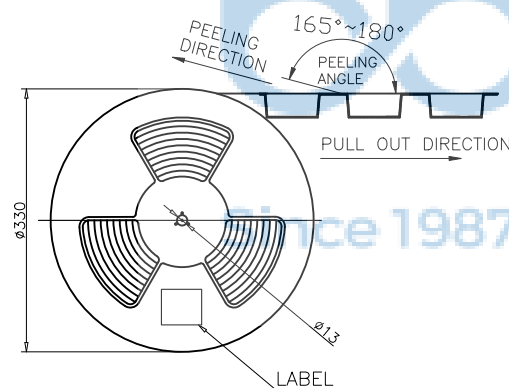
$$W+0.5$$

	REEL	CARTON
CONNECTOR (PCS)	600	6000

- 1: 10个链孔中心距累积误差范围 $\pm 0.22\text{mm}$ 之内.
- 2: 反弯度在 $1\text{mm}/250\text{mm}$.
- 3: 材料: PET料, 符合ROHS环境管理物质.
- 4: 所有尺寸符合EIA-481-B要求.
- 5: 厚度: $0.50 \pm 0.05\text{mm}$.
- 6: 使用 $\phi 330\text{mm}$ 胶盘, 包装零件数量: 600PCS(前后各空12PCS)/ 7.5m

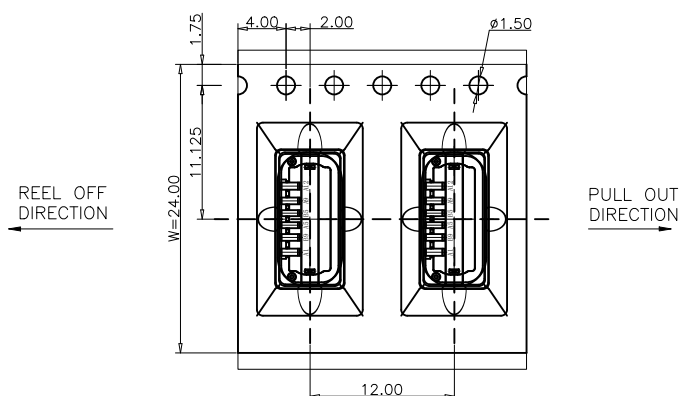

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBUconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.

PDWG,NO: 0395-1



深圳市步步精科技有限公司

NAME: TYPE-C 6P 防水母座 直立式 两脚DIP 端子SMT H=6.8
带中夹片 不锈钢外壳 带柱 IPX7 带防水圈 编带

	PJ. NO.: 126-225-060001-J2G
---	-----------------------------

	SIZE: A4	DRW NO.:

FINISH: SEE NOTES	MAT'L.: SEE NOTES
-------------------	-------------------

SCALE: N/A	REV.: A0	UNIT: mm	PAGE: 2/2
------------	----------	----------	-----------