
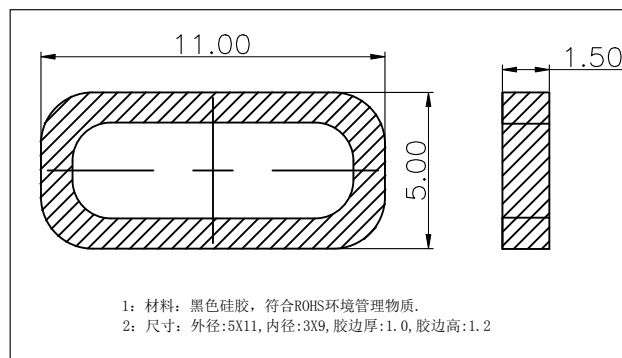
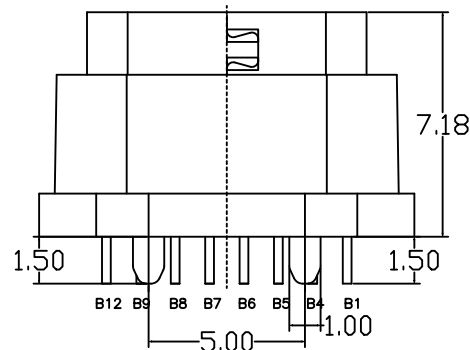
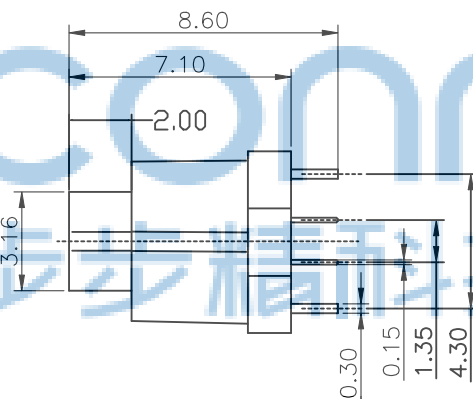
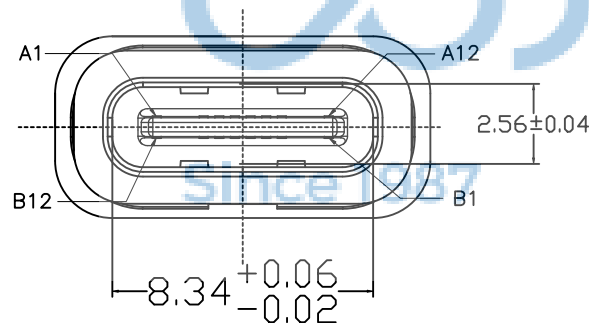
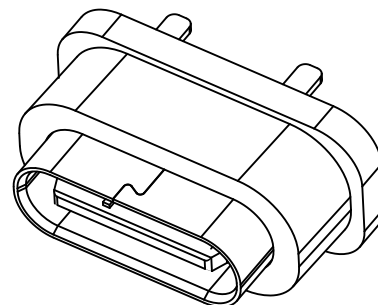
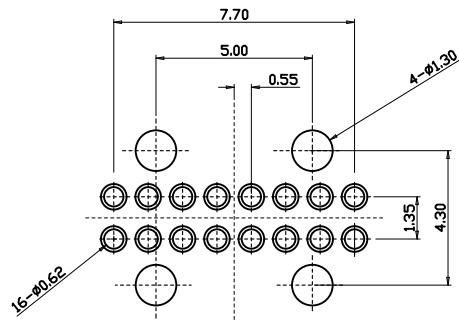


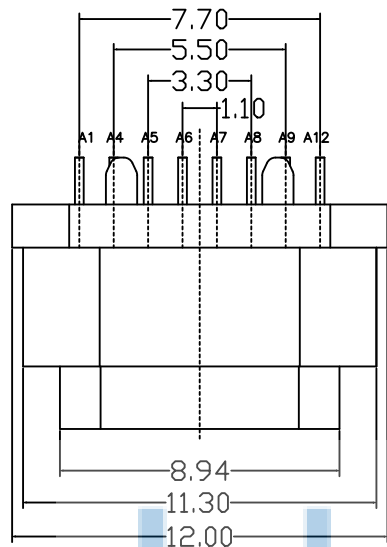

1: 材料: 黑色硅胶, 符合ROHS环境管理物质.
2: 尺寸: 外径: 5X11, 内径: 3X9, 胶边厚: 1.0, 胶边高: 1.2

建议防水圈

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0				

SPECIFICATIONS:

1. ELECTRICAL CHARACTERISTICS:

- 1-1. CONTACT RESISTANCE: 30mΩ MAX.
- 1-2. DIELECTRIC WITHSTANDING VOLTAGE: 100V AC FOR ONE MINUTE.
- 1-3. INSULATION RESISTANCE: 100MΩ MIN. MEASURED BY 500 VDC.

2. MECHANICAL CHARACTERISTICS:

- 2-1. INSERTION FORCE :0.5-2.0Kgf (REF.)
- 2-2. WITHDRAWAL FORCE :0.8-2.0Kgf (REF.)

3. LIFE TEST: 10,000 CYCLES.



PIN ASSIGNMENT:

Pin No.	Signal Name	Pin No.	Signal Name
A1	CND	B12	CND
A2		B11	
A3		B10	
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	D+	B7	D-
A7	D-	B6	D+
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10		B3	
A11		B2	
A12	CND	B1	CND

6	SHELL	STAINLESS STEEL	NI Plated	1PCS
5	SHIELDING PLATE	STAINLESS STEEL	---	1PCS
4	MD	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
3	CONTACT	COPPER ALLOY	Au/Ni Plated	1SET
2	CONTACT	COPPER ALLOY	Au/Ni Plated	1SET
1	HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE

OR IN PART WITHOUT

PRIOR WRITTEN PERMISSION.

PDWG.NO: 0366-2



深圳市步步精科技有限公司

.X: ±0.38
.XX: ±0.25
.XXX: ±0.13

X': ±3'
.X': ±2'
.XX': ±1'

NAME:

TYPE-C 16P 防水母座 直立式 四脚插 端子DIP H=7.18 IPX7

APPD. JM_Zheng

CHKD. LYX





DR. TSP

PJ. NO.: 126-225-160006-N5G

SIZE: A4 DRW NO.:

FINISH: SEE NOTES MAT'L.: SEE NOTES

SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2

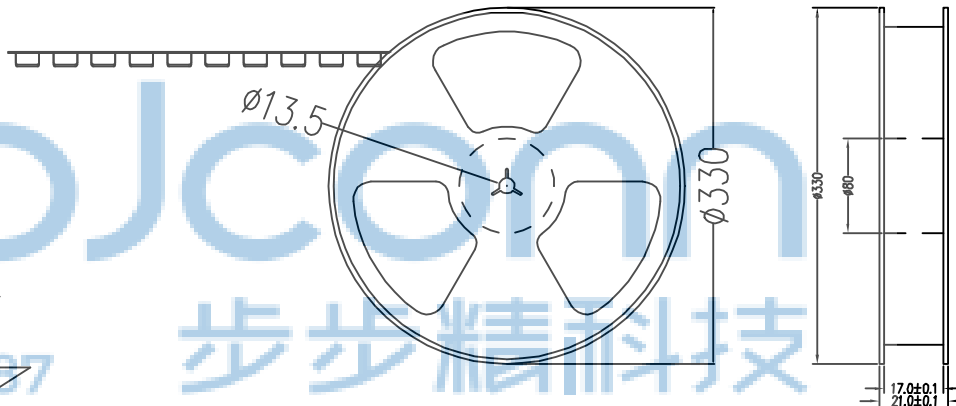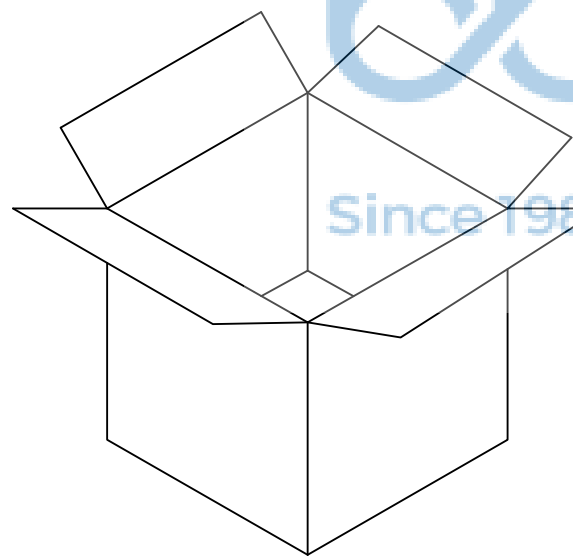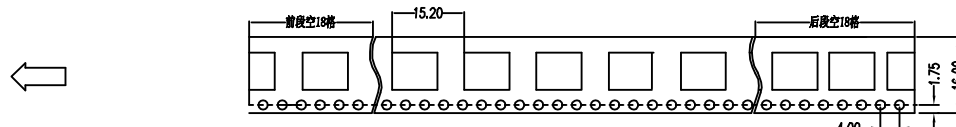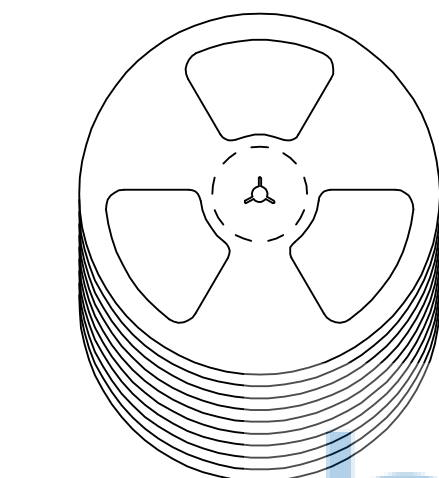

备注:

1. 包装数量: 500/PCS/卷, 10卷/箱。
2. 包装袋长度: 每卷前后各空10-20个空格, 中间包装。
3. 材质:
载体: 聚丙烯 (PS), 阻抗 $10^{6-9} \Omega$
上带: 聚乙烯 (PET), 阻抗 $10^{6-11} \Omega$
卷盘: 聚苯乙烯。

纸箱规格: 345*345*23MM

纸箱规格: 345*345*35MM

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司		NAME: TYPE-C 16P 防水母座 直立式 四脚插 端子DIP H=7.18 IPX7	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X': ±3" X'': ±2" X'': ±1"		PJ. NO.: 126-225-160006-N5G	
APPD.		JM_Zheng		SIZE: A4 DRW NO.:	
CHKD.		LYX		FINISH: SEE NOTES MAT'L.: SEE NOTES	
PDWG.NO: 0366-2		DR. TSP		SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2	