

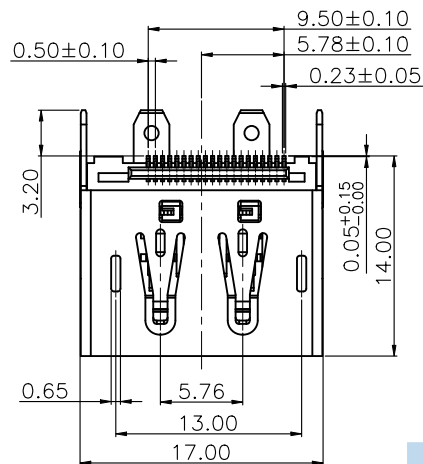

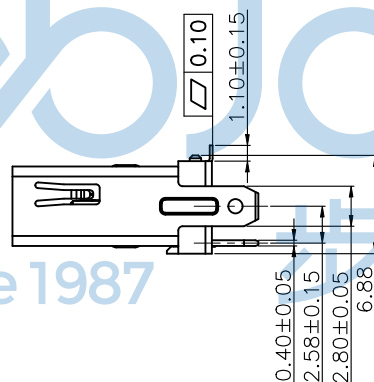



SECTION A-A

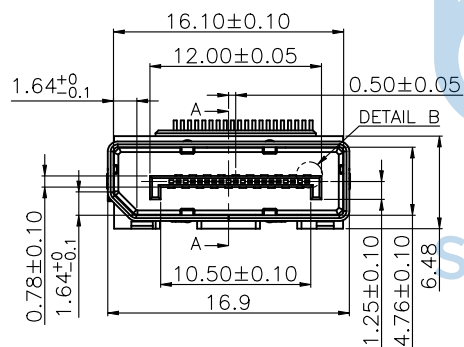

DETAIL C
SCALE 4:1



DETAIL B
SCALE 4:1

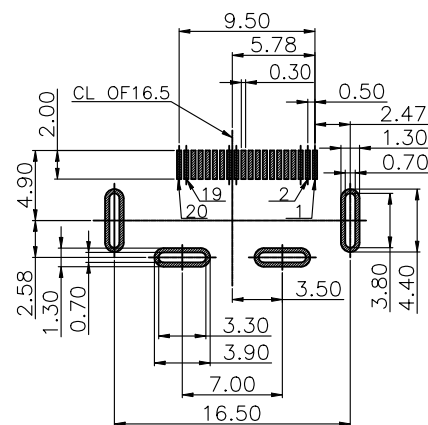

RECOMMENDED P.C.B LAYOUT(TOP VIEW)
TOLERANCE: ±0.05


REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	TSP

MATERIALS

- 1.HOUSING:L.C.P, (UL 94V-0), BLACK
- 2.TERMINAL:BRASS (C2680),
GOLD FLASH PLATING ON CONTACT AREA,
MATTE TIN PLATING ON SOLDER TAIL,
UNDER NICKEL PLATING OVER ALL.
- 3.SHELL:S50C/BRASS(C2680), NICKEL PLATING

SPECIFICATION




- 1.CURRENT RATING : 0.5 A MAX.
- 2.DIELECTRIC WITHSTANDING VOLTAGE : 500V AC R.M.S.
FOR ONE MINUTE.
- 3.INSULATION RESISTANCE : 100M OHMS MIN.
4. CONTACT RESISTANCE : 30m OHMS MAX.
5. OPERATING TEMPERATURE : -20°C TO +85°C.
6. INSERTION FORCE : 4.5kgf MAX.
7. EXTRACTION FORCE : 1.0~4.0kgf MIN.
8. SALT SPRAY : 24 HOURS PASS.
9. REFLOW SOLDERING(SMD COMPONENT) OVEN
- 10.TEMPERATURE:260°C.5SEC

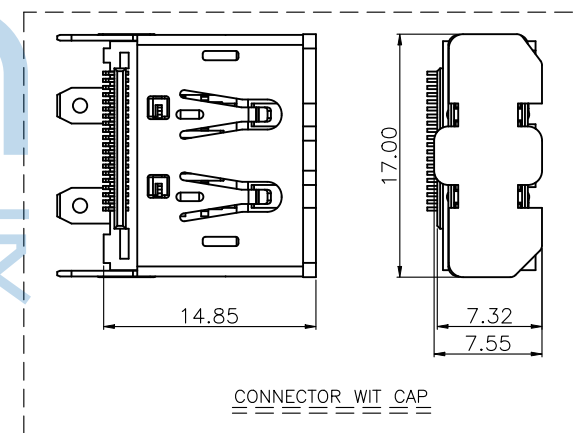




CONNECTOR WIT CAP

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司		NAME: DP 20P 母座 180度 四脚插 端子SMT 外壳脚长3.2 无弹片 H=14.0 平口 铜壳 编带	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	X*: ±3" .X*: ±2" .XX*: ±1"	APPD.	JM_Zheng	PJ. NO.:	158-224-200007-U4G
CHKD.	LYX	DR.	TSP	SIZE: A4	DRW NO.:
PDWG.NO:	0470-1	FINISH:	SEE NOTES	MAT'L.:	SEE NOTES
		SCALE:	N/A	REV.:	A0
		UNIT:	mm	PAGE:	1/2

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	TSP

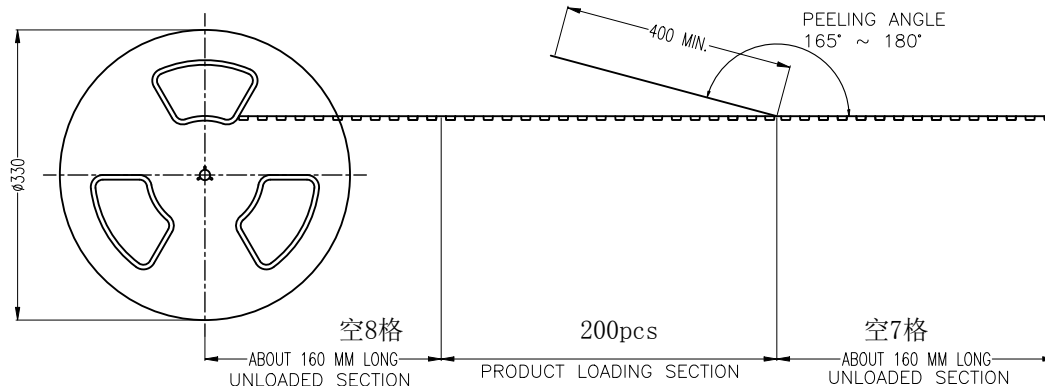

9 REELS



PACKAGE

1. SIZE :





REEL : DIA.=330mm

CORTON(外箱) : 345x345x450mm (LxWxH)

2. QUANTITY :

200 PCS/REEL(卷)

9 REELS/CARTON : 1800PCS

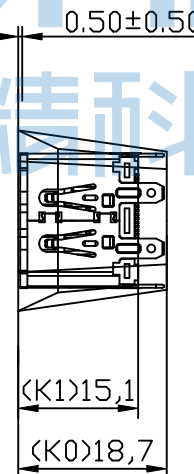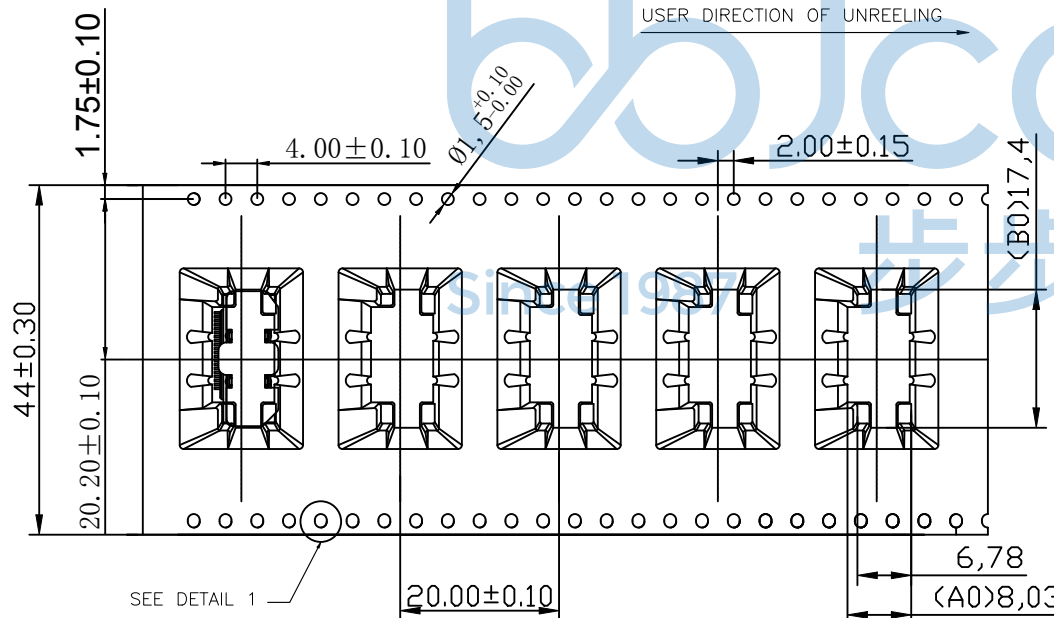

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司		NAME: DP 20P 母座 180度 四脚插 端子SMT 外壳脚长3.2 无弹片 H=14.0 平口 铜壳 编带	
.X: ±0.38	.X': ±3'	APPD. JM_Zheng		PJ. NO.: 158-224-200007-U4G	
.XX: ±0.25	.X': ±2'	CHKD. LYX		SIZE: A4 DRW NO.:	
.XXX: ±0.13	.XX': ±1'	DR. TSP		FINISH: SEE NOTES MAT'L.: SEE NOTES	
PDWG.NO: 0470-1		SCALE: N/A		REV.: A0	UNIT: mm
				PAGE: 2/2	