
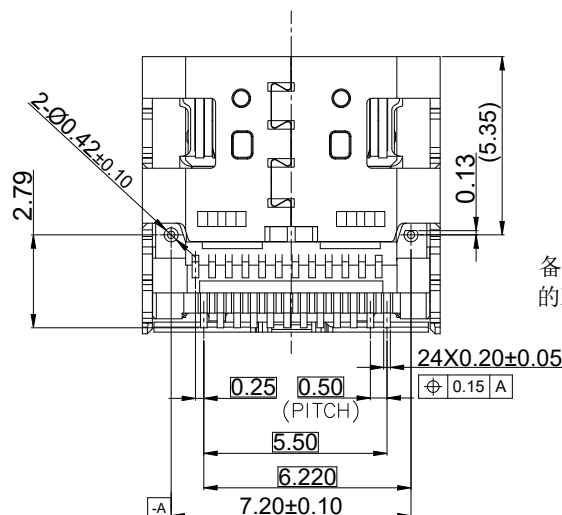
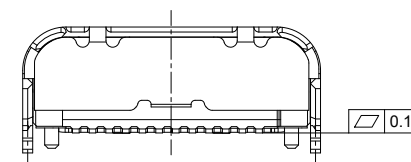
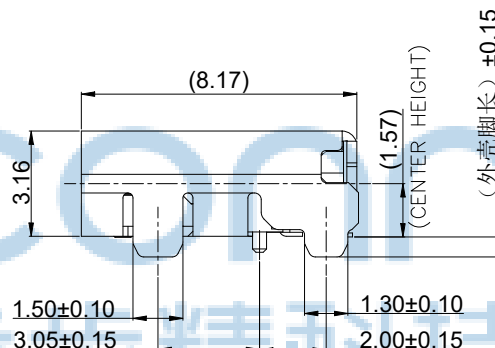
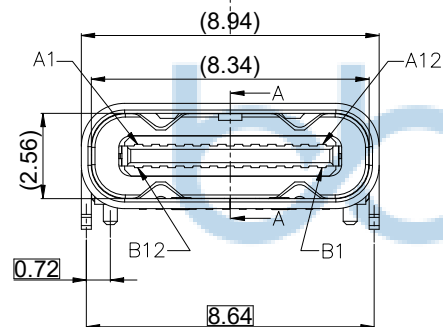
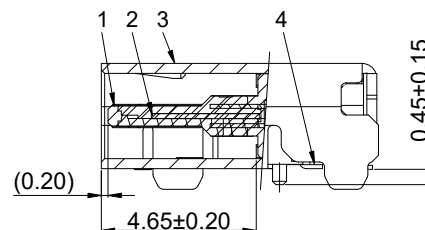


REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0		Initial release	/	GZY


NOTE/注释:

1. SPECIFICATION/规格:


- 1.1 Rated current (额定电流): 5.0 A
- 1.2 Voltage rating (额定电压): 5V AC
- 1.3 Contact Resistance (接触阻抗): 40 m Ω Max.
- 1.4 Insulation Resistance (绝缘阻抗): 100M Ω Min.
- 1.5 Withstanding voltage (耐电压): 100 VAC/minute
- 1.6 Mating force (插入力): 5~20N.
- 1.7 Unmating force (拔出力): 8~20N.
- 1.8 Durability Cycle(寿命循环): 10,000 cycle
- 1.9 Operating temperature (工作温度): -40°~+85°

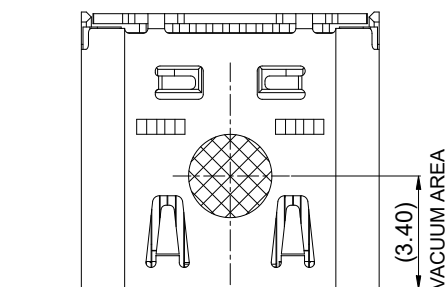

备注: 壳脚长为1.2, 1.6
的B, C两款成品壳脚有收腰



无DIP脚





PIN ASSIGNMENT:

A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12
GND	TX1+	TX1-	Vbus	CC1	D+	D-	SBU1	Vbus	RX2-	RX2+	GND
GND	RX1+	RX1-	Vbus	SBU2	D-	D+	CC2	Vbus	TX2-	TX2+	GND
B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1



THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG.NO: 0470-1

深圳市步步精科技有限公司	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	X': ±3" .X': ±2" .XX': ±1"
NAME: U4.0 40G速率 TYP-C 母座 24P 外壳四脚DIP 端子双排SMT CH=1.57 L=8.17 外壳脚长0.6 带柱 LCP黑胶 编带	PJ. NO.: 126-221-240011-U4G SIZE: A4 DRW NO.: FINISH: SEE NOTES MAT'L: SEE NOTES SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/3

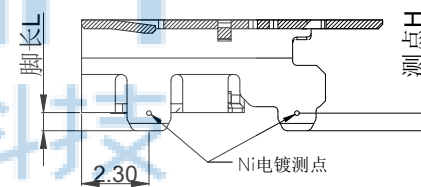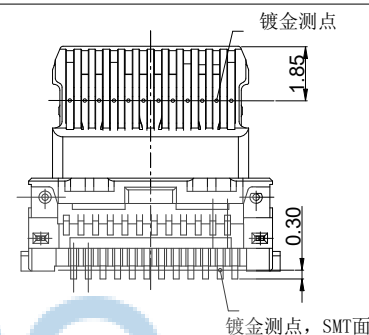


壳脚长L	镍测点H
------	------



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. PDWG.NO: 0470-1	 深圳市步步精科技有限公司			
	.X: ±0.38 X*: ±3* .XX: ±0.25 .X*: ±2* .XXX: ±0.13 .XX*: ±1*		NAME: U4.0 40G速率 TYP-C 母座 24P 外壳四脚DIP 端子双排SMT CH=1.57 L=8.17 外壳脚长0.6 带柱 LCP黑胶 编带	
	APPD.	JM_Zheng		PJ. NO.: 126-221-240011-U4G
	CHKD.	LYX		SIZE: A4 DRW NO.:
	DR.	GZY	FINISH: SEE NOTES	MAT'L.: SEE NOTES
		SCALE: N/A REV.: A0	UNIT: mm PAGE: 2/3	

bbJconn

Since 1987 步步精科技

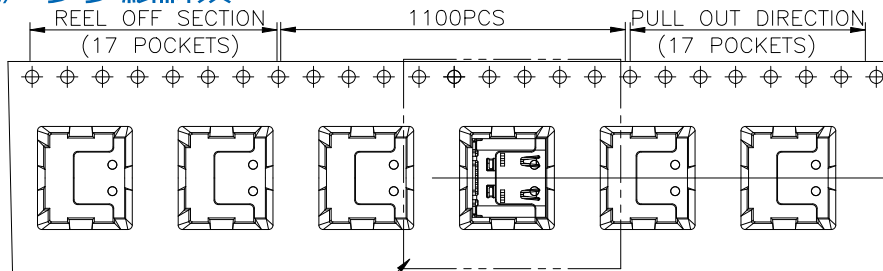

SEE DETAIL X

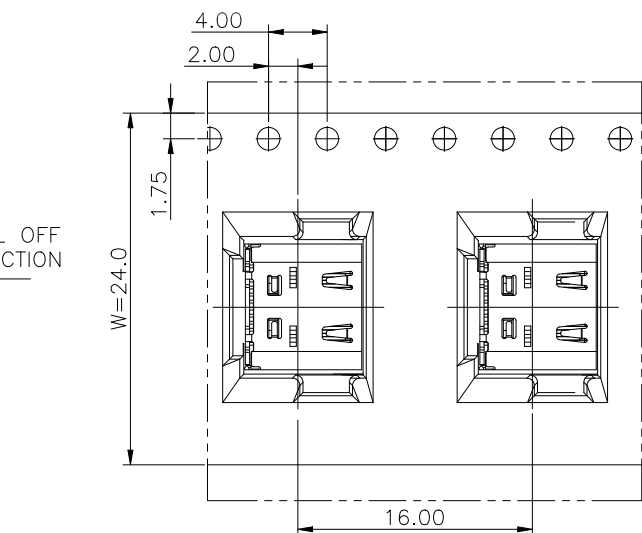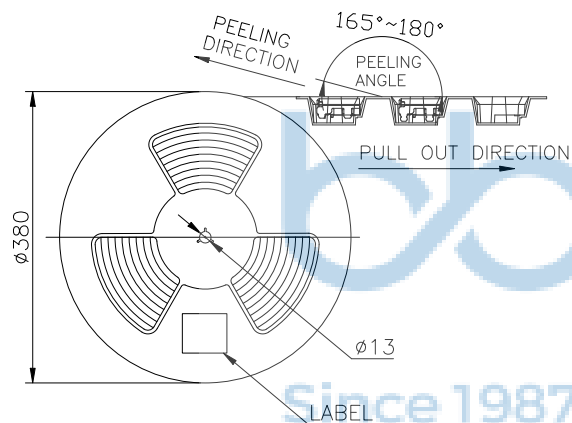

REEL OFF DIRECTION

PULL OUT DIRECTION




PAPER BOARD

REEL AND TAPE

REEL AND TAPE

PAPER BOARD

REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0		Initial release	/	GZY

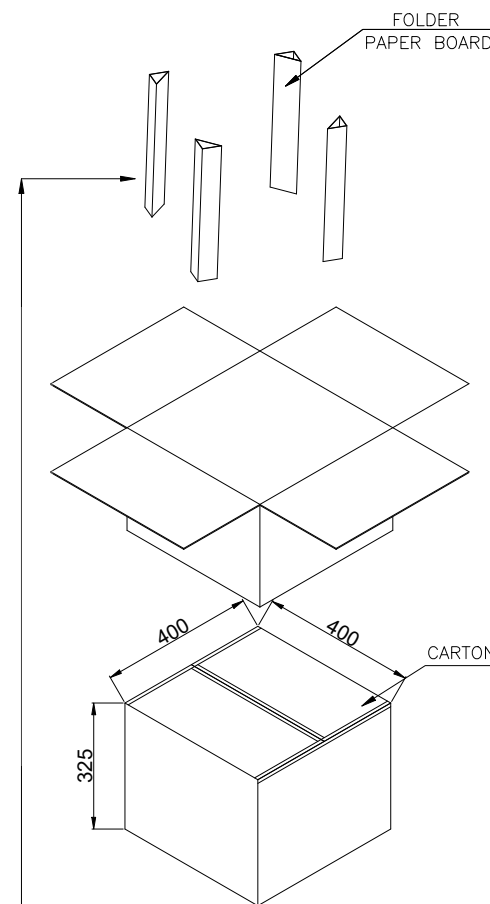

	REEL	CARTON
CONNECTOR (PCS)	1100	11000

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. PDWG.NO: 0470-1

.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X': ±3" .X': ±2" .XX': ±1"		NAME: U4.0 40G速率 TYP-C 母座 24P 外壳四脚DIP 端子双排SMT CH=1.57 L=8.17 外壳脚长0.6 带柱 LCP黑胶 编带	
APPD.	JM_Zheng	P.J. NO.: 126-221-240011-U4G		SIZE: A4 DRW NO.:	
CHKD.	LYX	FINISH: SEE NOTES		MAT'L.: SEE NOTES	
DR.	GZY	SCALE: N/A		REV.: A0 UNIT: mm PAGE: 3/3	

深圳市步步精科技有限公司