


带灯轻触主要技术指标; Illuminated Tact Switch Main Specifications:



气候等级 Climate Grade	额定值 Rated Values	接触电阻 Contact Resistance	耐电压 Dielectric Strength	绝缘电阻 Insulation Resistance	动作力 Operating Force	寿命 Life	盐雾试验 Salt mist. Test
-25℃ 至 +75℃	30V DC, 30mA	≤0.05Ω	250V AC	≥100MΩ	▶260gf±50gf	10W times	12±1 hours.
-25℃ 至 +75℃	30V DC, 30mA	≤0.05Ω	250V AC	≥100MΩ	160gf±50gf	10W times	12±1 hours.



元件面孔位图

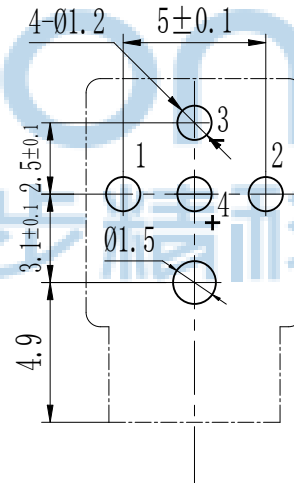

电原理图



6	LED 灯		1	透明	A0670蓝光长负短正
5	按钮	PA66	1	瓷白	
4	弹片	不锈钢	1	Ag	
3	塑座	PA66	1	黑色	
2	定位板	PA66	1	黑色	
1	卡件	H62	1	Ag	
序号	名称	材料	数量	镀层/颜色	备注

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG.NO: 0436-1

BBJconn 深圳市步步精科技有限公司

.X: ±0.38
.XX: ±0.25
.XXX: ±0.13


X*: ±3*
.X*: ±2*
.XX*: ±1*

NAME: 轻触开关 7.6x8.7x12 侧插 带柱 蓝灯
瓷白按钮 9.9直径银漆帽 帽雕 (下电源) 符号 不锈钢弹片 260gf


APPD. JM_Zheng
CHKD. LYX
DR. LHC

PJ. NO.: 901-431-193002-T9G
SIZE: A4 DRW NO.:
FINISH: SEE NOTES MAT'L.: SEE NOTES
SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/4

PE袋规格: 260*185



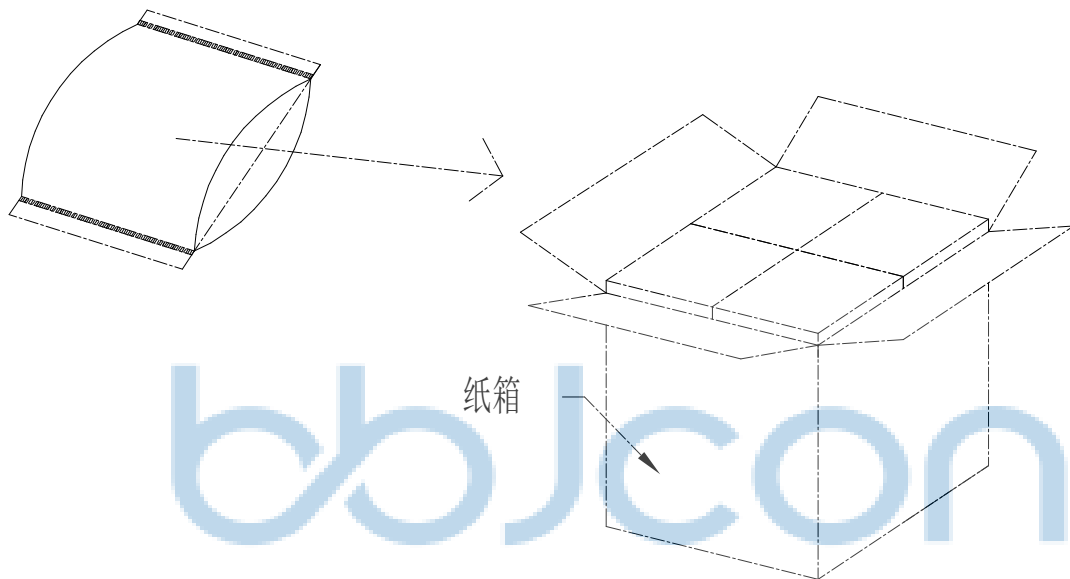


成品标签

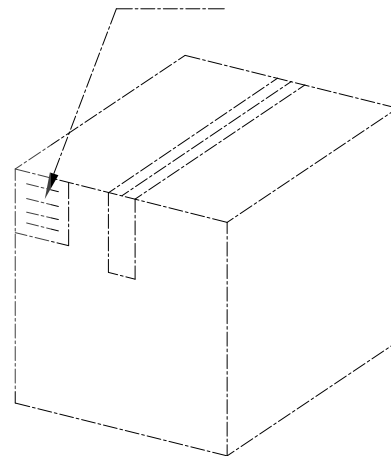

1. 包装要求:
- 1.1 每个PE袋包装200pcs;
 - 1.2 每1袋放一小纸盒;
 - 1.3 每20个小纸盒放一个纸箱, 共计4000pcs;
 - 1.4 纸箱外贴上标签

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. PDWG.NO: 0436-1		深圳市步步精科技有限公司					
		NAME: 轻触开关 7.6x8.7x12 侧插 带柱 蓝灯 瓷白按钮 9.9直径银漆帽 帽雕 (下电源) 符号 不锈钢弹片 260gf					
	.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		.X*: ±3* .X*: ±2* .XX*: ±1*				
	APPD.	JM_Zheng				PJ. NO.: 901-431-193002-T9G	
	CHKD.	LYX				SIZE: A4	DRW NO.:
	DR.	LHC			FINISH: SEE NOTES		MAT'L.: SEE NOTES
			SCALE: N/A	REV.: A0	UNIT: mm	PAGE: 2/4	

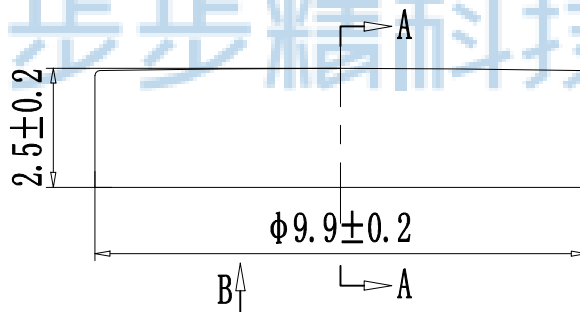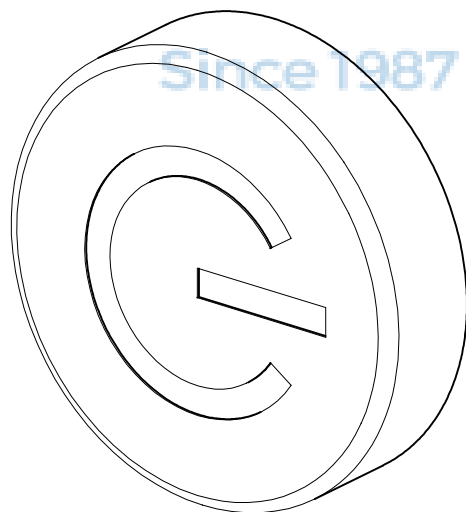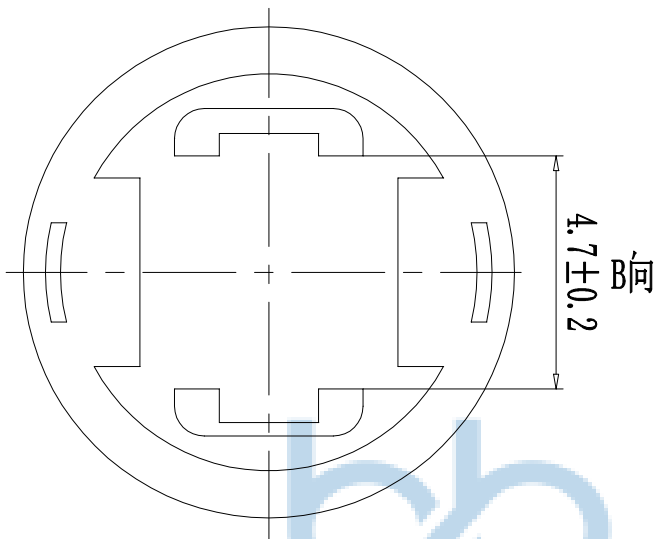


技术要求


1. 制件表面光洁平整，不得有垫伤、变形、毛刺等缺陷。
2. 材质各有害元素符合欧盟要求。
3. 未注公差的线性尺寸的极限偏差按下表所示。

材质 ABS

颜色 白色/黑色/银色

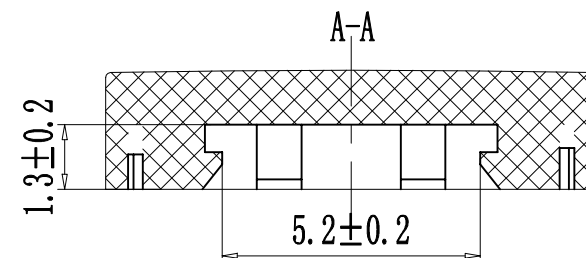

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	X*: ±3* .X*: ±2* .XX*: ±1*	NAME: 轻触开关 7.6x8.7x12 侧插 带柱 蓝灯 瓷白按钮 9.9直径银漆帽 帽雕 (下电源) 符号 不锈钢弹片 260gf	
APPD.	JM_Zheng	PJ. NO.:	
CHKD.	LYX	SIZE: A4 DRW NO.:	
DR.	LHC	FINISH: SEE NOTES MAT'L.: SEE NOTES	
PDWG.NO: 0436-1		SCALE: N/A	REV.: A0 UNIT: mm PAGE: 3/4

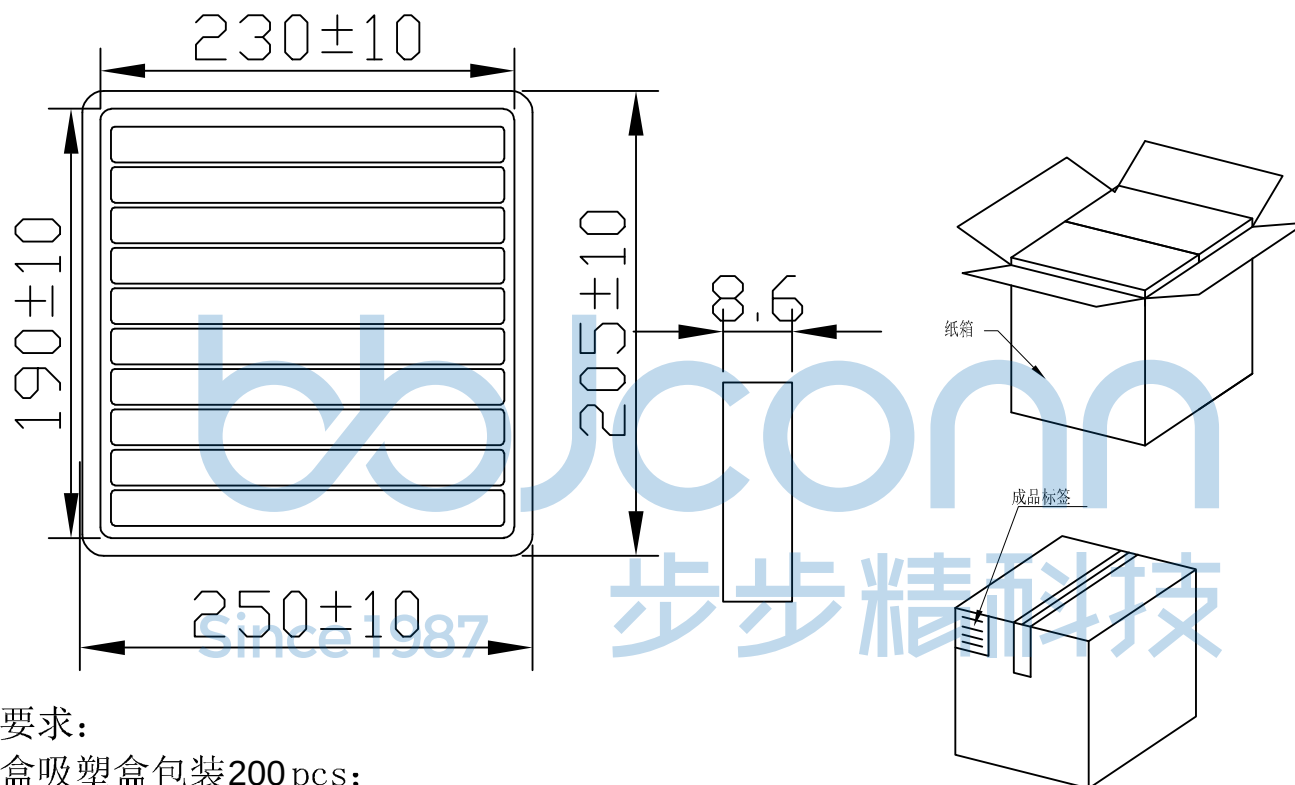

1. 包装要求:
- 1.1 每盒吸塑盒包装200 pcs;
 - 1.2 纸箱外贴上标签

纸箱规格: 350*210*290



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		 深圳市步步精科技有限公司		NAME: 轻触开关 7.6x8.7x12 侧插 带柱 蓝灯 瓷白按钮 9.9直径银漆帽 帽雕 (下电源) 符号 不锈钢弹片 260gf	
				PJ. NO.: SIZE: A4 DRW NO.:	
APPD. JM_Zheng		CHKD. LYX		FINISH: SEE NOTES MAT'L.: SEE NOTES	
PDWG.NO: 0436-1		DR. LHC		SCALE: N/A	REV.: A0
				UNIT: mm	PAGE: 4/4