

RECOMMENDED PCB LAYOUT(TOP VIEW)



THICKNESS T=1.0mm  
DEFAULT TOLERANCE+/-0.05

INTERFACE(FRONT VIEW)

A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12
GND			VBUS	CC1	DP1	DN1	SBU1	VBUS			GND
GND			VBUS	SBU2	DN2	DP2	CC2	VBUS			GND
B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1

PIN ASSIGNMENT

PIN NO.	A1&B12	A4&B9	B8	A5	B7	A6	A7	B6	A8	B5	A9&B4	A12&B1
SINGAL NAME	GND	VBUS	SBU2	CC1	DN2	DP1	DN1	DP2	SBU1	CC2	VBUS	GND
PCB PAD NO.	C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12

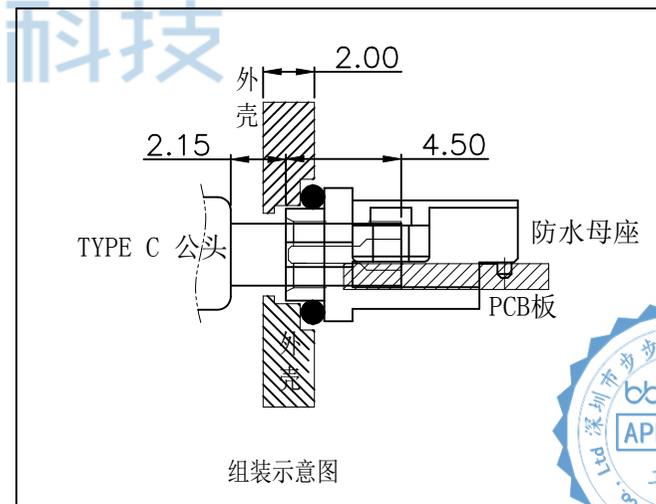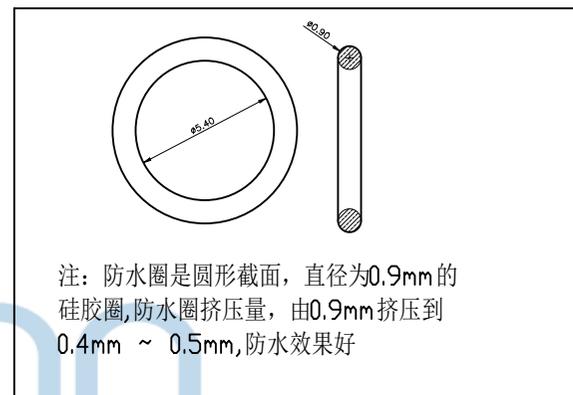

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.

PDWG.NO: 0388-1

APPD. JM\_Zheng  
CHKD. LYX  
DR. LHC





深圳市步步精科技有限公司

.X: ±0.38 .XX: ±0.25 .XXX: ±0.13  
X': ±3' .X': ±2' .XX': ±1'


NAME: TYPE-C 16P 母座 锁板式 L=9.05 沉板1.75  
端子SMT 带柱 防水IPX8 带防水圈 (EZ-USBC-1100-C165-WP)

PJ. NO.: 126-221-160002-S5G  
SIZE: A4 DRW NO.:

FINISH: SEE NOTES MAT'L.: SEE NOTES  
SCALE: N/A REV.: AO UNIT: mm PAGE: 2/3

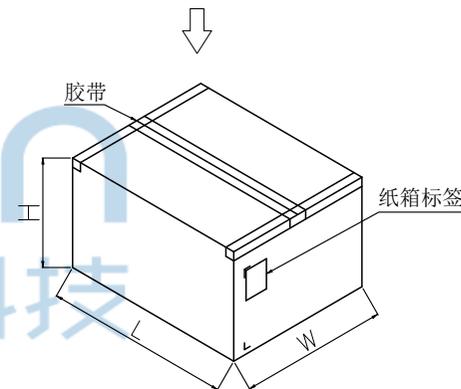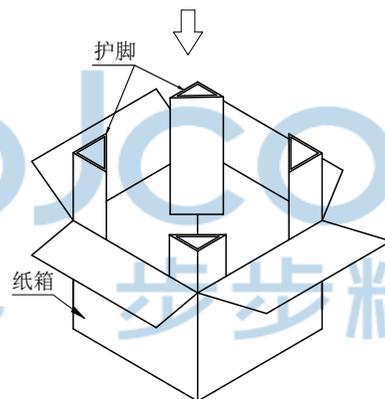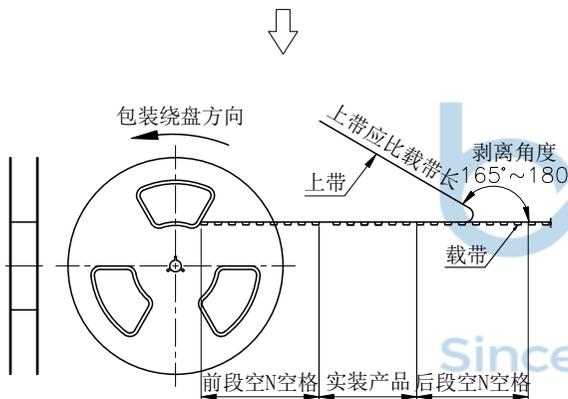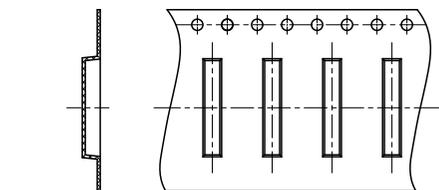

纸箱规格: W357\*L357\*H335MM

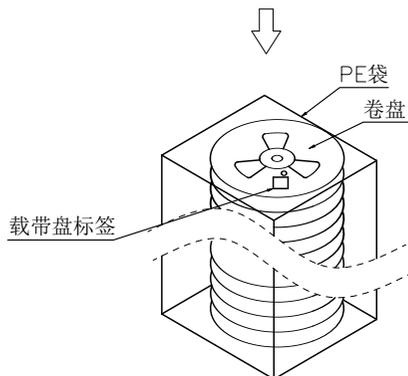

备注:

- 1、包装数量: 700/PCS/卷, 10卷/箱。
- 2、包装袋长度: 每卷前后各空10-20个空格, 中间包装。
- 3、材质:
  - 载体: 聚丙烯 (PS), 阻抗10  $\Omega^{6-9}$
  - 上带: 聚乙烯 (PET), 阻抗10  $\Omega^{6-11}$
  - 卷盘: 聚苯乙烯。



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		 <b>深圳市步步精科技有限公司</b>	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X': ±3' .X': ±2' .XX': ±1'	
APPD. JM_Zheng		NAME: TYPE-C 16P 母座 锁板式 L=9.05 沉板1.75 端子SMT 带柱 防水IPX8 带防水圈 (EZ-USBC-1100-C165-WP)	
CHKD. LYX		PJ. NO.:126-221-160002-S5G	
DR. LHC		SIZE: A4   DRW NO.:	
PDWG,NO: 0388-1		FINISH: SEE NOTES   MAT'L.: SEE NOTES	
		SCALE: N/A   REV.: A0   UNIT: mm   PAGE: 3/3	