

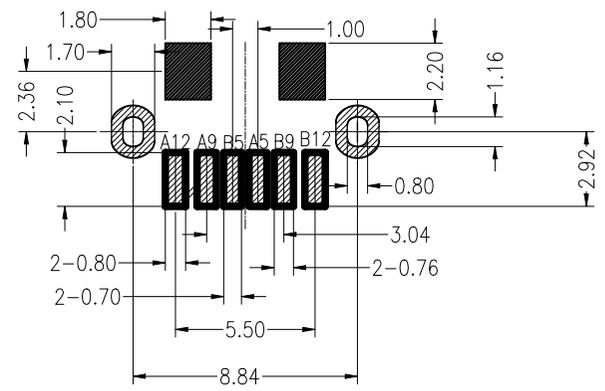
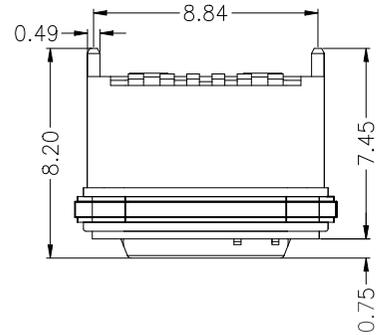
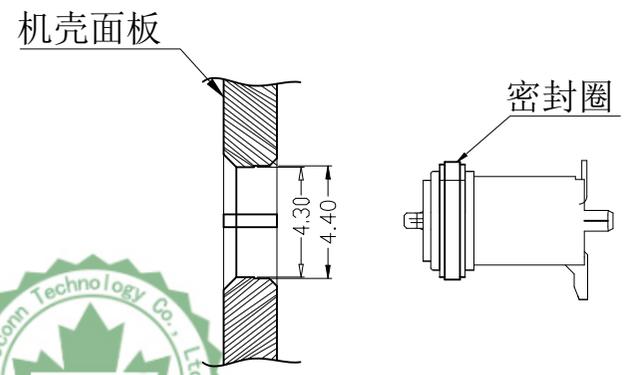

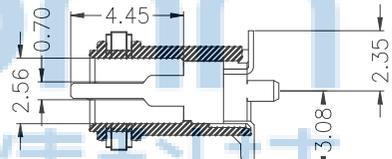



REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0		Initial release	/	SGF

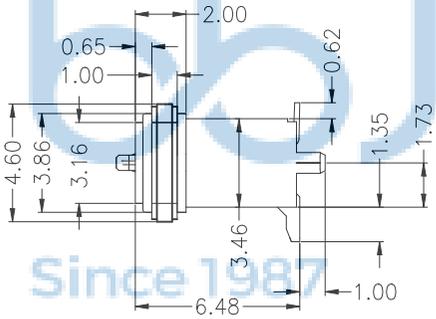


RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

- Note:
- Material:
 - InsertMolding: LCP UL 94V-0 Black
 - Contact:C5191 T=0.20mm 50U 10U middleclip SUS t=0.15mm
 - Shell: Zinc Alloy. 100U
 - ELECTRICAL:
 - CURRENT RATING: VBUS AND GND CONTACTS RATED AT 1.25A PARALLELED FOR A TOTAL OF 3A;
 - INITIAL CONTACT RESISTANCE :40 MEGOHMS
 - DIELECTRIC WITHSTANDING VOLTAGE: 100V AC MIN;
 - MECHANICAL CHARACTERISTICS:
 - MATING FORCE:5~20N
 - UNMATING FORCE:8~20N(INITIAL), 6~20N(AFTER 10000 CYCLES)
 - FREQUENCY: 200±50 CYCLES /HOUR,10000 CYCLES
 - OPERATING TEMPERATURE ; -40°~80°.
 - WATERPROOF: IP-X7.

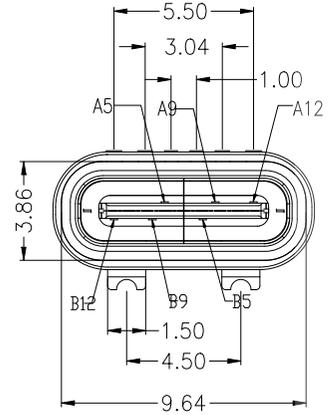

前后组装方式

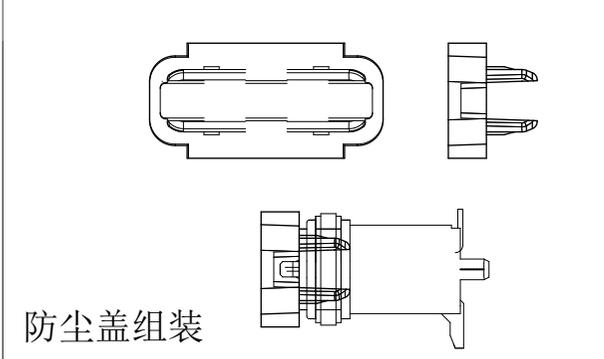

防尘盖组装

B12	GND
B9	VBUS
B5	CC2
A5	CC1
A9	VBUS
A12	GND
PIN	SIGNAL NAME



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.

PDWG.NO: 0508-1








深圳市步步精科技有限公司

NAME: TYPE-C 6P 防水母座 直立式 外壳两脚贴 端子SMT 舌片外露 0.75 带柱 H=6.48 锌合金外壳 带中夹片 IPX7 编带

APPD.	JM_Zheng	PJ. NO.:
CHKD.	LYX	SIZE: A4 DRW NO.:
DR.	SGF	FINISH: SEE NOTES MAT'L: SEE NOTES

SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2

REV.	ECN NO	CONTENT	DATE	ENGINEER
AO		Initial release	/	SGF

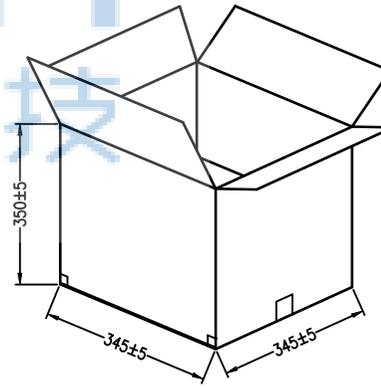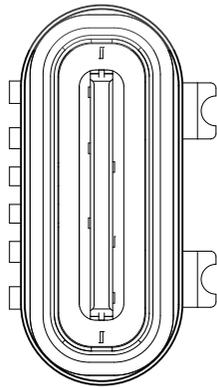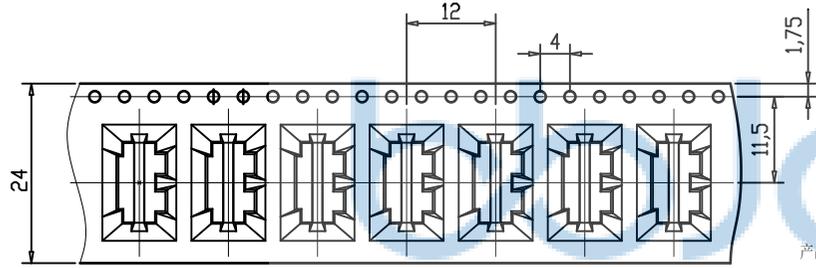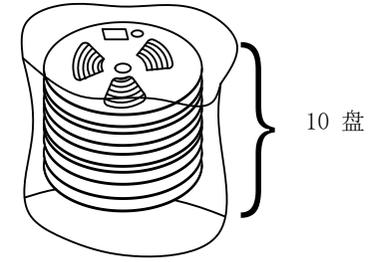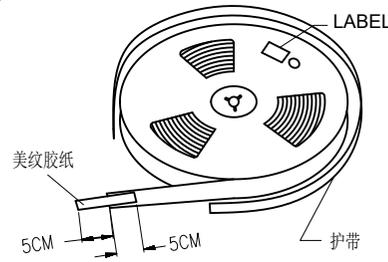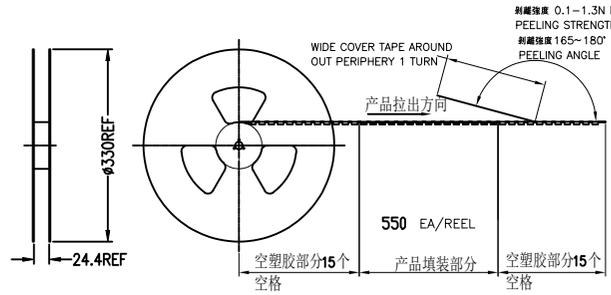

说明:

- 1, 将检查合格的产品, 放入承载带中, 一盘包装550PCS;
- 2, 将10盘承载带放入纸箱中;
- 3, 将纸箱封装好, 贴上标签.

每箱数量	净重 (Kg)	毛重 (Kg)
5500PCS	xxx	xxx



THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG.NO: 0508-1

bbJconn 深圳市步步精科技有限公司

.X: ±0.38	X': ±3'
.XX: ±0.25	.X': ±2'
.XXX: ±0.13	.XX': ±1'
APPD.	JM_Zheng
CHKD.	LYX
DR.	SGF

NAME:	TYPE-C 6P 防水母座 直立式 外壳两脚贴 端子SMT 舌片外露 0.75 带柱 H=6.48 锌合金外壳 带中夹片 1PX7 编带		
PJ. NO.:			
SIZE:	A4	DRW NO.:	
FINISH:	SEE NOTES	MAT'L.:	SEE NOTES
SCALE:	N/A	REV.:	AO
UNIT:	mm	PAGE:	2/2